




### 12 Dimmer System Model 98502

- Two SD 6C dimmer packs
- 12/24 channel lighting console
- Rack with locking front door
- Six 23-50 Zoom spotlights
- Six 6 inch Fresnels
- Three 15 foot circuit strips

#### Applications:

- Proscenium openings from 10 feet to 19 feet.
- Elementary and Secondary School systems, Ballrooms, Corporate Presentation Systems
- House of Worship, Small Theatre, Cable Broadcasters, live music.

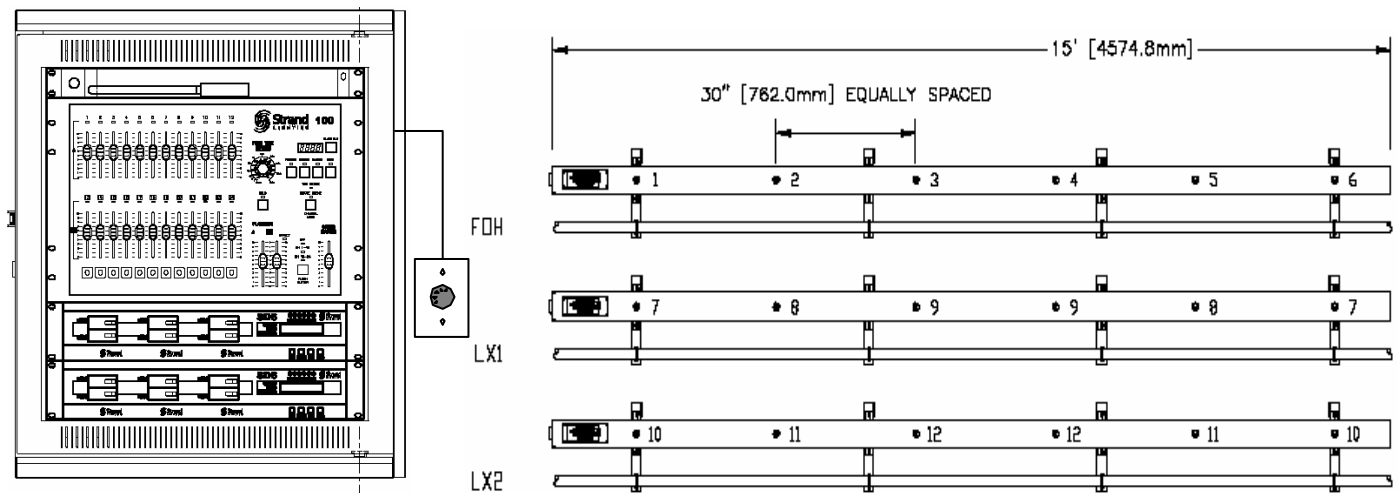

Strand Lighting (Canada)  
 Inc/Eclairages Strand (Canada) Inc  
 2430 Lucknow Drive No 15  
 Mississauga Ontario L5S 1V3 Canada  
 Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
 © Strand Lighting Ltd. 2002  
 Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.


## Small System Packages



## Strand Dimming Systems


### Dimmers:

- Capacity 12 channels of 1800W each
- Secondary input for additional lighting console
- Full output of all channels simultaneously with suitably rated supply.
- Internally configured supply for single phase 120/240V 3 wire + ground or three phase 120/208V 4 wire + ground.
- Toroidal chokes for high quality filtering

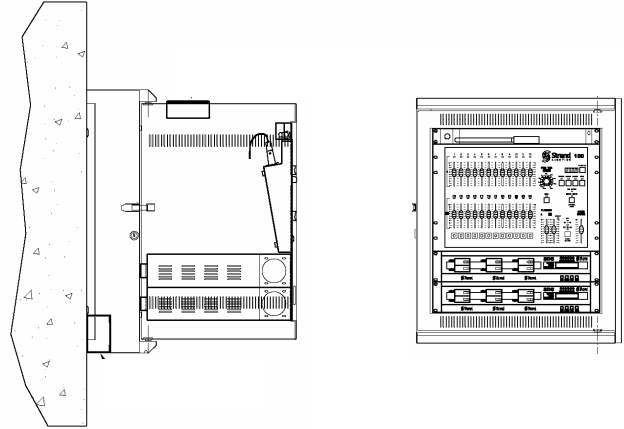


### Lighting Console:

- 100 Series 12/24 Channel 2 Scene Preset
- Simple Manual control with timed crossfade
- Built in effect operation
- Grand Master and Blackout key
- Fully digital



### Distribution:

- Three, 15 foot pre-wired channelmount
- Lightweight Aluminum construction
- 120V, 15A U-ground receptacles
- Terminal strip connections at one end
- Black finish with pre-defined circuit numbers
- Single Pipe hangers standard
- Schedule 40 pipe included
- Pre-engineered. CSA Listed



### Fixtures:

- Professional quality Zoom Spotlight and Fresnel
- Includes color frame, connector, C-clamp, and safety cable
- Includes long life lamps and one spare of each type
- Zoom focusing for easy setup
- Wide Fresnel focus adjustment



\* *Note: System package does not include installation, wiring, conduit boxes, commissioning or items not described herein.*

**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# System Components

Qty	Part No.	Description
<b>SL SERIES ELLIPSOIDAL SPOTLIGHT</b>		
		<i>supplied w/ med. 2 pin socket, C-clamp &amp; colour frame</i>
6	11421	SL Series Spotlight 23-50 degree 575 W <a href="#">Accessories for SL Series Spotlight ( 19 - 50 degree )</a>
6	82003	Safety Cable ( 18" length / 100 lbs. )
6	98001	15A Grounded 3 Wire U-Ground Parallel Blade
7	GLA	575W Philips Broadway Lamp, 1500 Hours. (Recommended)
<b>FRESNELITES - Theatre</b>		
		<i>supplied with medium pre-focus socket, C-clamp, wireguard, colour frame</i>
6	12081	Fresnelite 6" (152mm) 500/1000W(3380) <a href="#">Accessories for Fresnelite 6" - Theatre</a>
6	82003	Safety Cable ( 18" length / 100 lbs. )
6	98001	15A Grounded 3 Wire U-Ground Parallel Blade
7	BTL	500 W Lamp
<b>100 SERIES LIGHTING CONTROL CONSOLES</b>		
		<a href="#">100 Series Entry Level Manual Control Console</a>
1	61312	12 channel 2 scene preset/ 24 channel single scene
<b>SD 6 DIMMER RACK</b>		
2	75409	6 X15 Amp dimmers with rear panel w/ knock-outs
3	98091	Patch Cable DMX - 1' ( A5F to A5M )
1	98512	Swing Out Wall rack with locking door / fan / Racklite kit
<b>DISTRIBUTION &amp; ACCESSORIES</b>		
1	98502-001	FOH 15' blk. / 6 circuit / 6 u-ground / hanger kit
2	98502-002	LX1 & LX2 15' blk. /3 circuit / 6 u-ground / hanger kit
3	98502-003	Schedule 40 pipe
1	98502-004	Dimmer Wiring Kit for 12 dimmers c/w flexible cable and terminal strips
1	98502-005	DMX merger
1	98204	Single D5M Receptacle on 1 gang wall plate (DMX in)
1	98401	Apollo Perfgel Colour Media (Lt.Blue #AP4500)
1	98401	Apollo Perfgel Colour Media (Lt. Amber #AP7300)

**List price \$19,950.00**

(Canadian Dollars). Dealers or Representatives may sell for less

**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# 12 Dimmer System Recommended Design

## FIXTURE PLAN

The front of house, (FOH) lighting position is populated with six 23/50 zoom ellipsoidal fixtures lamped at 575W for energy saving. The zooms are aimed at three on stage focus positions coloured “cool” and “warm” providing a basic pool of front light that may be controlled with the lighting console to suit “mood” of the scene. Zoom fixtures are provided for their ease of focusing and variety of beam angles to suit the placement of the FOH circuit strip relative to the stage.

The on stage LX1 and LX2 are populated with theatrical Fresnels lamped at 500W for energy saving. The wide focus angle of the Fresnel allows a three point focus on stage for each LX1 and LX 2. The optical design of the Fresnel allows the beam to be “cut” providing control of light spill with optional barn doors. Circuit pairing provides basic overhead light “fill”. Spare circuits are provided for future purchased or rented fixtures as specials or effects. Using the attached lighting plan and pre-cut colour media the installer may focus the lighting fixtures and demonstrate a complete, working lighting system to the owner.

## DIMMER RACK

The dimmer rack is EIA 19 inch format with swing out centre section and “see through” front door. For ease of installation the lighting console and SD 6C dimmers are shipped out of the rack. The open rear enclosure of the rack may be detached from the main section to make the installation of conduit and the wiring kit with easier. When the installation of the supplied wiring kit complete, the rack may be mounted on the back box and made ready for the component installation. Starting from at the bottom, the SD 6C dimmers are rack mounted one at a time and wired in by the contractor. In the unlikely event a dimmer requires service, it may be unscrewed from the rack and pulled out with the flexible conduits approximately  $\frac{3}{4}$  of the way. A split in the top cover provides access to the “no tools” replacement of plug in Triac and Opto coupler components.

It is recommended to limit the maximum dimmer output voltage, (when the incoming supply voltage is high) by 5% to 10% below the recommended lamp voltage to significantly extend lamp life. This may be programmed on the SD 6C front panel controls.

## LIGHTING CONTROL

A simple to operate and permanently available 100 Series console is rack mounted in the system. It can be used to light a show with a few lighting changes or for quick setup stage lighting. A secondary console input is provided for a future purchased or rented console if required. The secondary input is merged with the 100 Series rack mounted console in highest takes precedence fashion. Simply connect another console to the secondary input and turn the 100 Series grand master off. However, the 100 series still remains operational to “pile on” levels to the secondary input as a backup console or additional back stage control panel.



# 12 Dimmer System Specification

## 1.0 PURPOSE AND INTENT

- .1 The purpose and intent of these Specifications is to obtain proposals for the supply and commissioning of a new lighting system, The system must be packaged to include dimmers, console, fixtures, distribution, schedule 40 pipe, lamps, plugs, colour media, design layouts, electrical drawings, focus plans and instructions for installation and commissioning. Provide the owner a complete, tested, working and demonstrated system.
- .2 The system shall include a wall mount EIA19 inch equipment rack with rear swing out access and front hinged locking “see through” door. The rack shall contain a rack mounted lighting console and rack mounted dimmers. Provide a secondary DMX input to merge highest takes precedence with the dimmers when another lighting console is plugged in and outputting DMX.
- .3 The equipment shall be supplied by Division 11 or Division 16 as detailed in the “System Components” section included in this document. The equipment shall have a one year manufacturer’s limited warranty. Manufacturers must have Canadian parts and service Authorized Service Centres across Canada and service response time of 24 hours or less.
- .4 The system design is provided as a guide to simplify the engineering, lighting design and installation work and to provide the information for a working and fully commissioned package by the installing contractor. Approval drawings are by cut sheet sign-off included in the “Design and Installation Manual” included with this document. Where engineers, architects or consultants drawings are provided they supercede the drawings and plans included in this document.
- .5 All dimmers, fixtures, consoles and distribution supplied with the system must be cUL, CSA or ETL approved for use in Canada.

## 2.0 DIMMERS

- .1 Provide 12 x 1.8kw dimmers with over current protection at 15 Amps each. Dimmer packs shall be rack mounted in 6 or 12 dimmer increments. Dimmers must be field configured for single phase 120/240 volt (2 pole) or 120/208 volt three phase (3 pole) supply. Dimmers must be rated to supply 80% of all outputs continuously and simultaneously with fully rated supply.
- .2 Dimmer packs shall have toroidal chokes for high quality filtering, over temperature protection, cooling fan and front panel LCD with keypad for simple setup.
- .3 Dimmer packs must have programmable Minimum and Maximum level for each dimmer to set occupancy safety levels or top-set dimmer levels to increase lamp life. Dimmers must include DMX addressing with individual patching for all dimmers.

- .4 Top cover access to the dimmer without completely removing it from the rack shall be provided. Triac or SCR pass devices and associated opto-couplers shall be removable without soldering or removal of main dimmer components.
- .5 The dimmer shall indicate the presence of DMX and provide front panel control of dimmer channels without the console signal present.

### **3.0 LIGHTING CONSOLE**

- .1 Rack mounted permanent console
  - .1 Shall be 24 channel with 12 channel two scene preset and 24 channel, single scene manual capability.
  - .2 Split cross fader with time function, bump buttons, Grand Master and Blackout, built in effect operation and DMX 512 output

### **4.0 PROFILE SPOTLIGHTS**

- .1 The luminaire shall have a precision optical 23-50 degree zoom system designed around a Dichroic reflector in combination with a high efficiency, low energy consumption, long life 575W lamp.
- .2 The Housing shall rotate 360 degrees to provide optimum luminaire orientation at all times. The shutters shall be stainless steel. The shutters shall operate in three independent planes.
- .3 Pattern and gobo size shall be B. Exterior finish shall be available in black epoxy powder coat. The rear housing assembly shall open for reflector cleaning.

### **5.0 FRESNEL SPOTLIGHTS**

- .1. The luminaire shall be a variable focus Fresnel spotlight designed to accommodate tungsten-halogen or incandescent medium pre-focus base lamps in 500, 750, and 1000 watt sizes. Wide angle coverage 1/2 peak angle 7° - 59° in one lens is required.
- .2 Lens door construction shall be of spun steel for strength and durability. Die cast aluminum accessory clips shall be screw retained to the lens door and shall be capable of holding a combination of a barn door and three color frames and/or scrims.
- .3 The fixture shall produce a defined cut in the projected beam when used with a barn door to control "light spill" on curtains, stage and scenery. Par fixtures that do not provide this feature shall not be acceptable.

## **6.0 DISTRIBUTION**

- .1 The circuit strips shall be Channelmount custom built plug in strip and wire way including a lighting instrument mounting system with schedule 40 pipe. They shall be made from heavy duty, corrosion resistant, light weight (compared to steel) extruded aluminum and pre-wired for simple field connections.
- .2 Splice bars and pipe joiners, (when required) are supplied with segmented construction for ease of assembly and shipping. Single Pipe hangers are supplied standard.
- .3 Rigging the Channel Mount to the building structure is not included in the system package and shall be supplied and installed by the rigging contractor.
- .4 Terminal strip wiring device shall be provided at one end for contractors tie-in. All receptacles shall be home run to the terminal strip to allow future circuit expansion. All internal wiring to the terminal block shall be #12 AWG and complete from the receptacle to the terminal strip.
- .5 All receptacles are 120V 15A Parallel blade U-Ground, flush mounted. Circuit identification shall be black on yellow adhesive label minimum one inch high.

## **7.0 INSTALLATION**

- .1 All load and supply high voltage electrical wiring, rigid or flexible conduit, boxes, breaker panels and breakers, connectors and low voltage wiring for the secondary input required to install the components specified herein are supplied and installed by the contractor and are not included in this package.
- .2 System commissioning is not included in the system package however, information shall be provided to install, hang, aim, focus and program the lighting system. The manufacturer shall provide 800 number technical support and factory trained staff to provide any additional information to the installing contractor as required.
- .3 The installing contractor shall mount the supplied colour media and aim / focus the fixtures according to the supplied plan and demonstrate the basic operation of the system to the owner at the convenience of the contractor.

## **8.0 ORDERING**

- .1 The system shall be Strand Lighting Canada Model 98502.



*[www.strandlighting.com](http://www.strandlighting.com)*



**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859

The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.





# 12 Dimmer System Model 98502



# DESIGN & INSTALLATION MANUAL


**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# Model 98502 High Voltage Electrical Drawings

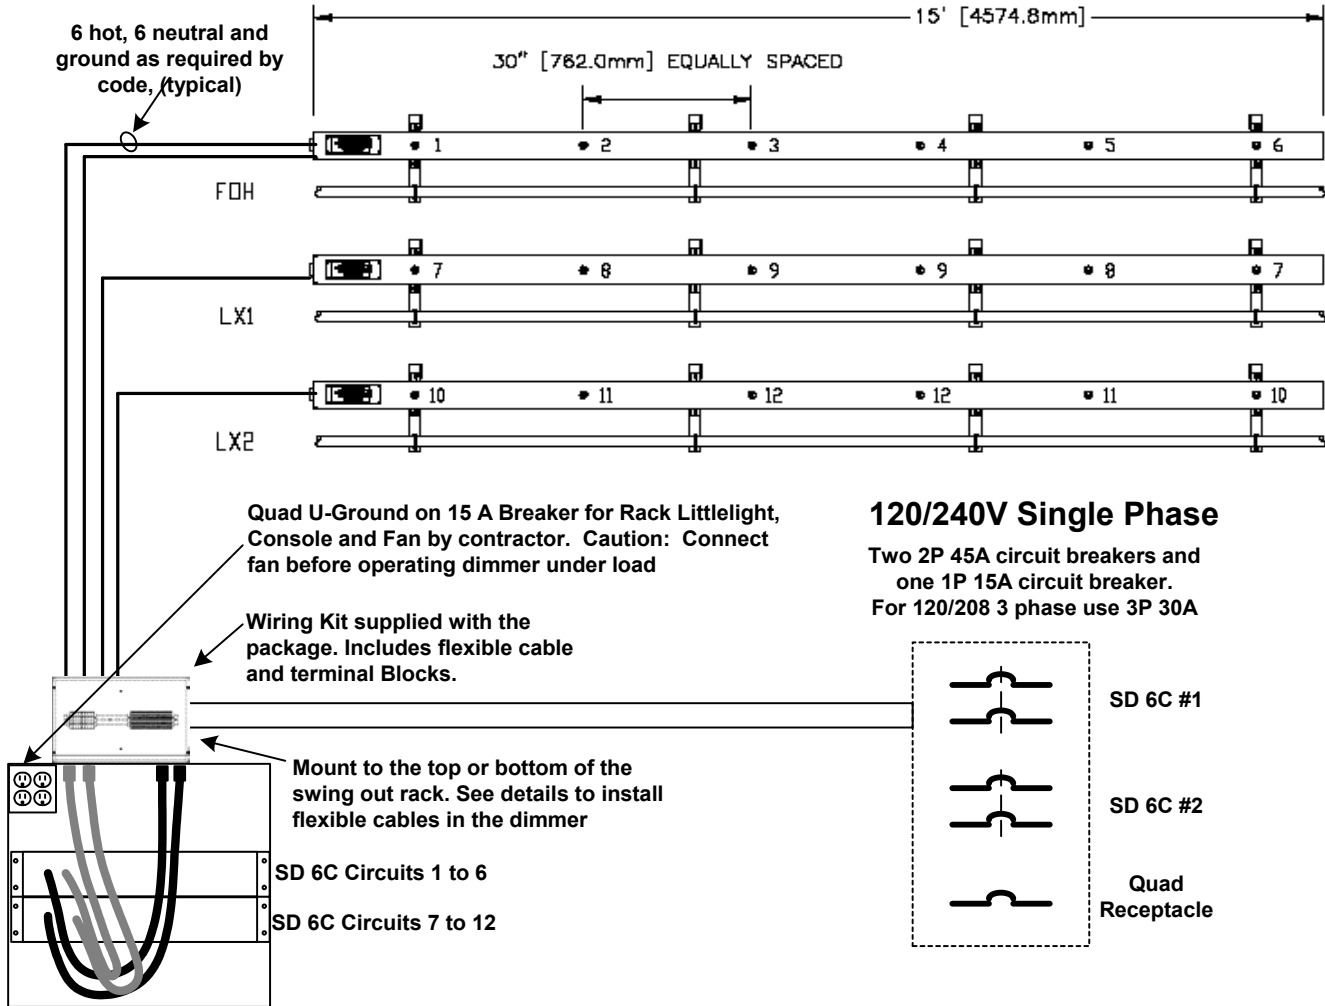

**Note:** Electrical panel, wiring, conduit and circuit breakers supplied and installed by contractor. Not included with system package

**Note:** Channel Mount distribution strips are provided with single pipe hangers. Rigging to structure or "fixture cages" are not included with this system package. Supply and install by a qualified rigging contractor.



Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859

The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# Model 98502 Low Voltage Electrical Drawings

Components inside wall rack  
Rear view shown



DMX cables from console to dimmers and dimmer interconnect are supplied with the system package

DMX Merger supplied with the package

Belden 9829 or equivalent supplied and installed by contractor

Conduit supplied and installed by contractor


DMX In faceplate supplied in package. Typically mounted at the front of the stage

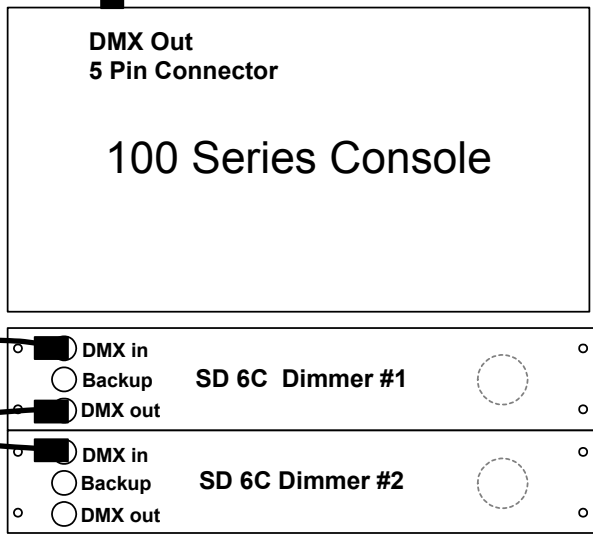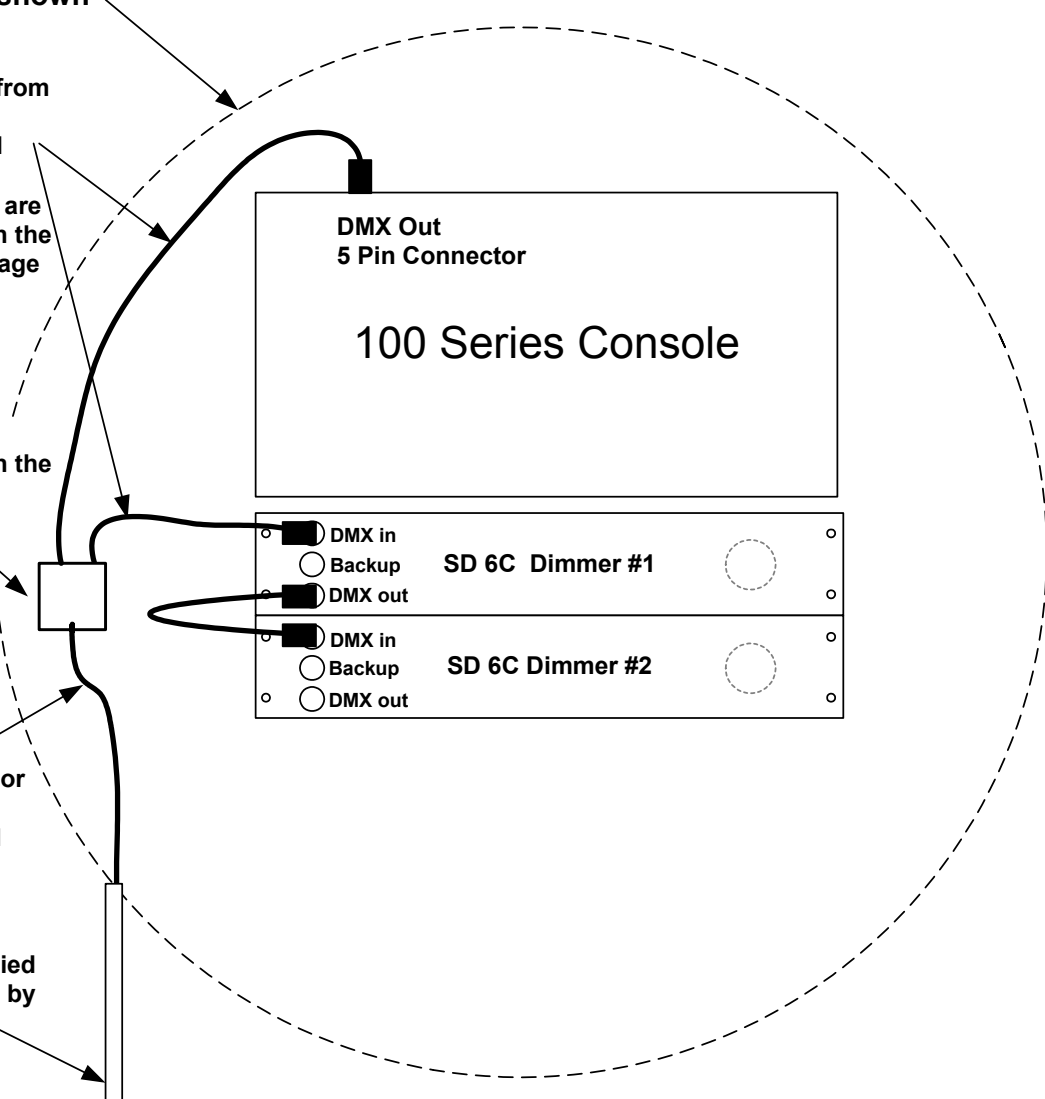

**DIMMER PROGRAMMING NOTES (See the SD 6C Manual):**  
**DMX START ADDRESS (Menu 1):**  
 SD 6C #1 Start address = 1  
 SD 6C #2 Start address = 7



# Model 98502 Circuit & Distribution Plan

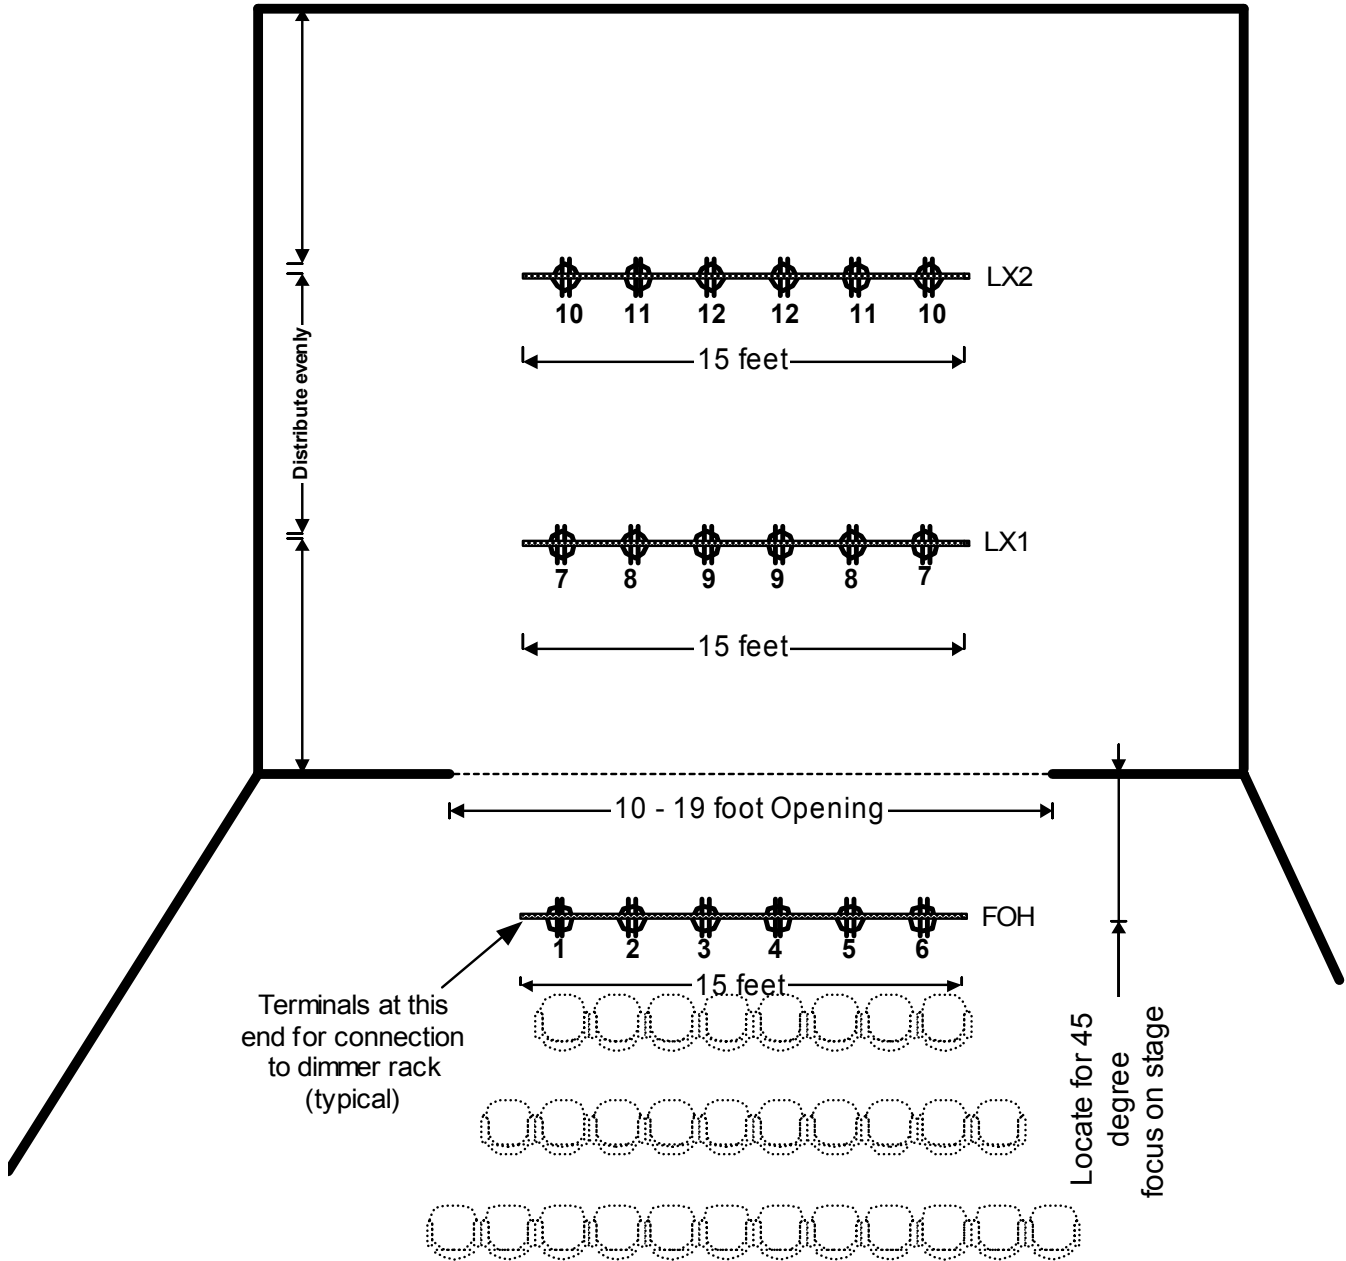

Note: This is only a guide for circuit placement distribution with this package system. If other project drawings specify this information it should be confirmed which is accurate.

Caution: Safe, approved rigging practices and electrical code must be followed. This is not intended as an electrical schematic or engineered rigging document.




**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859

The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# Model 98502 Circuit & Distribution Elevation


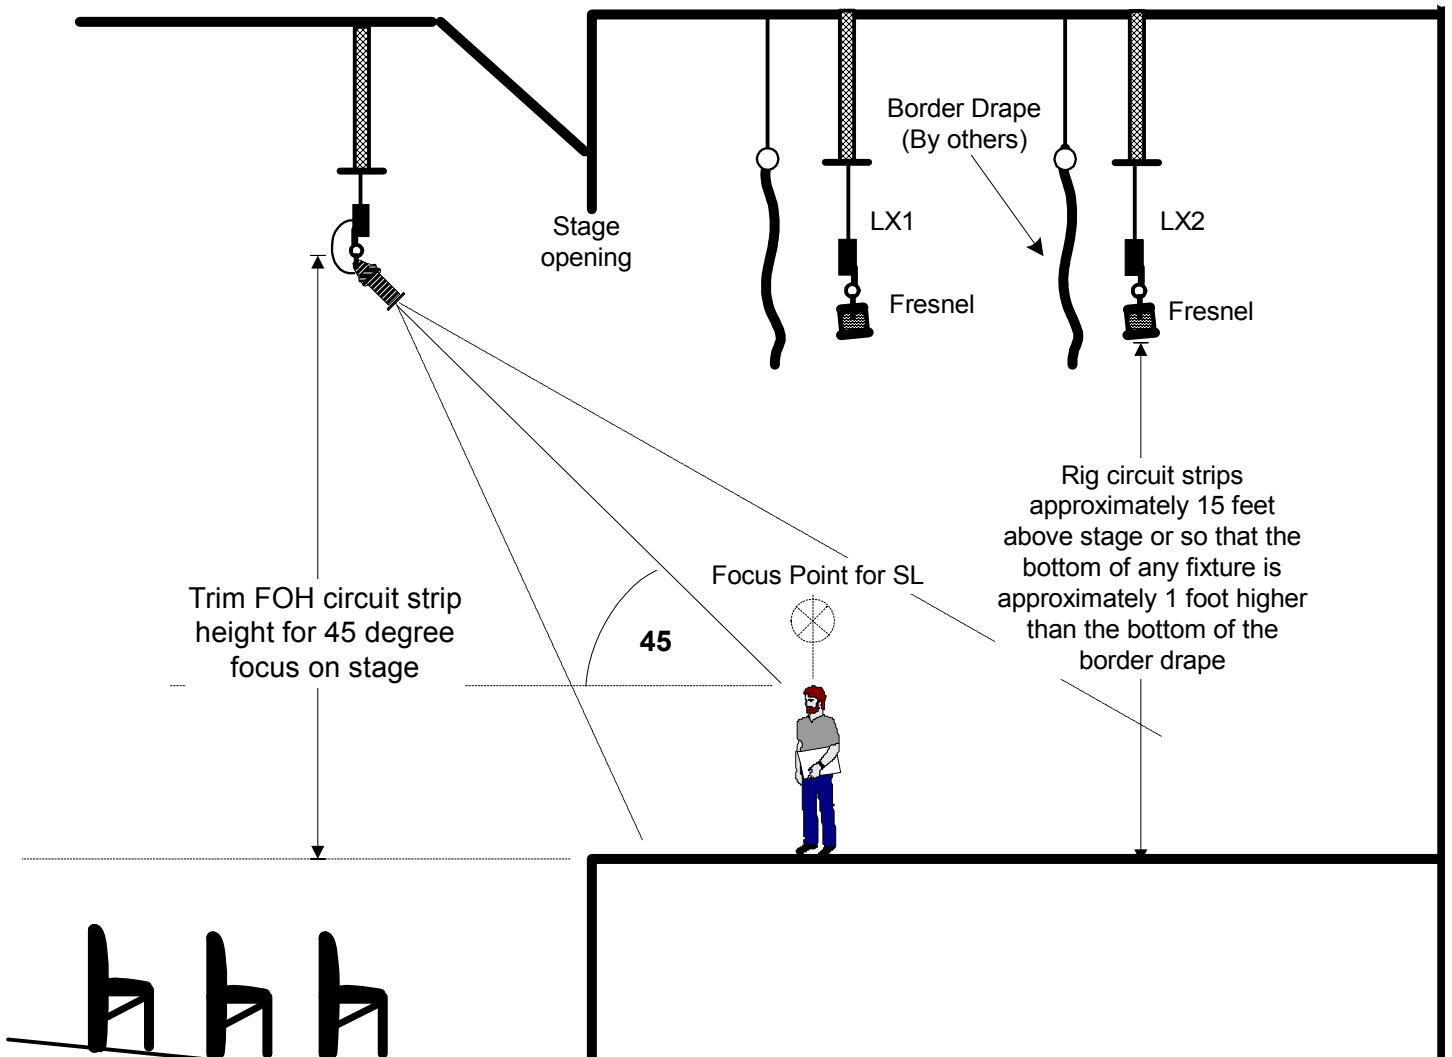


Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859

The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# Model 98502 SL Focus Plan

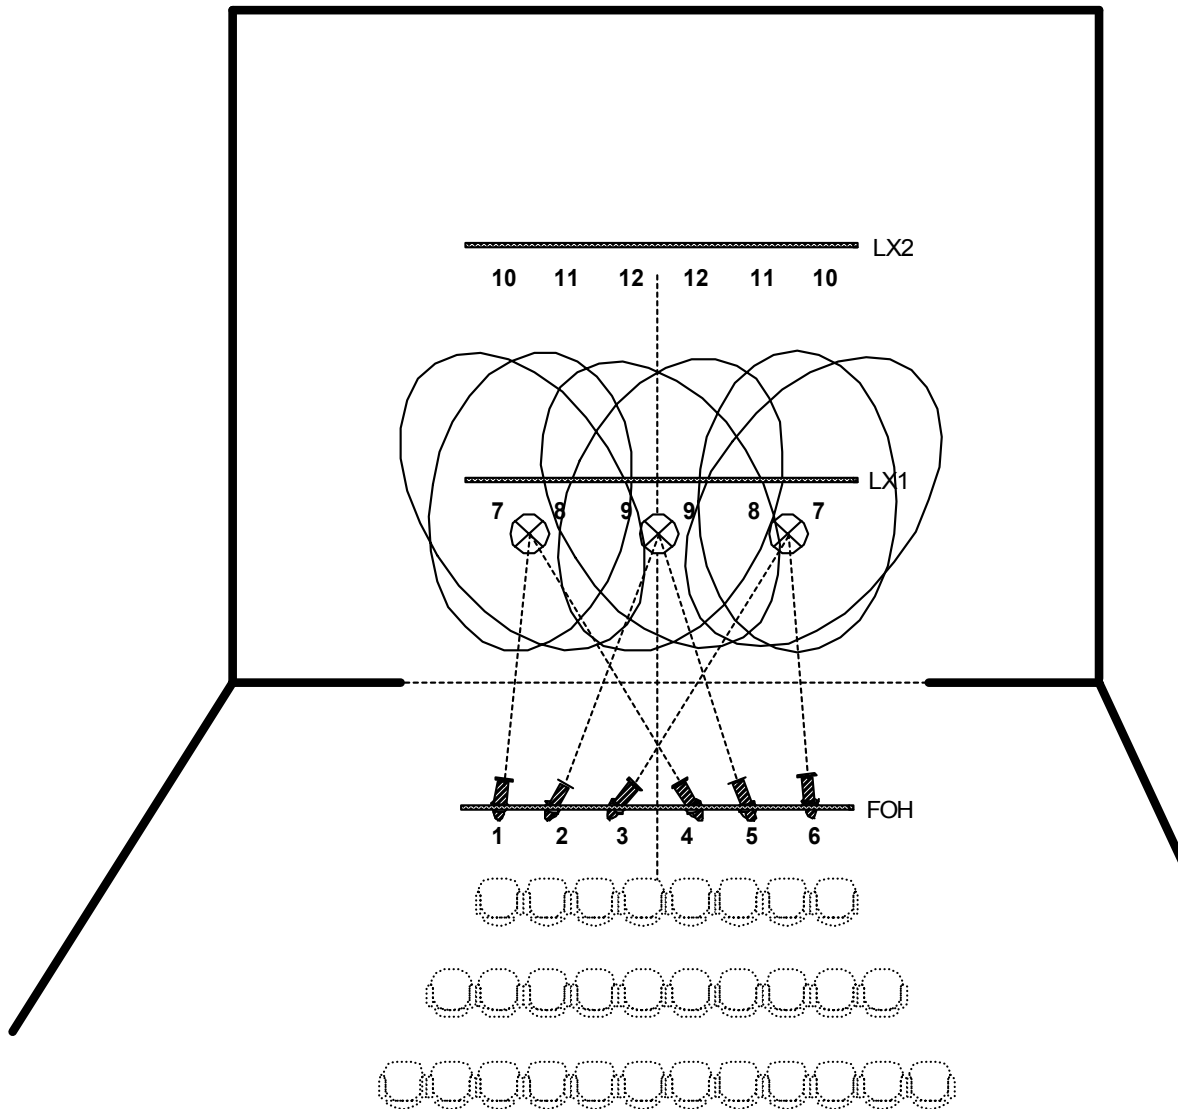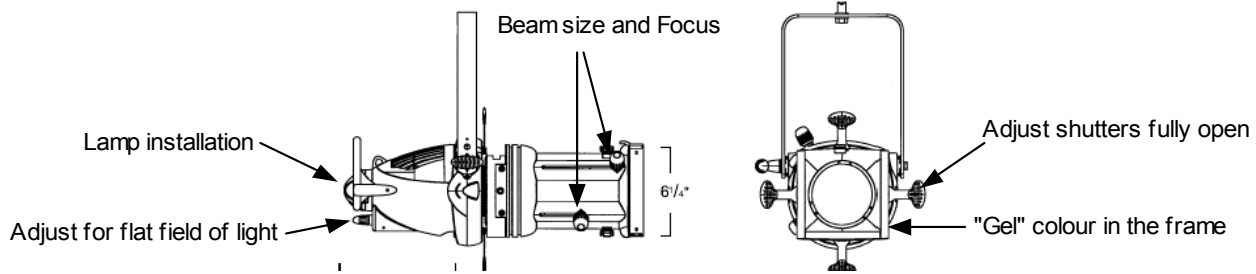

Caution: Use safety cables from the fixture to the pipe


**Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc**  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.



# Model 98502 Fresnel Focus Plan

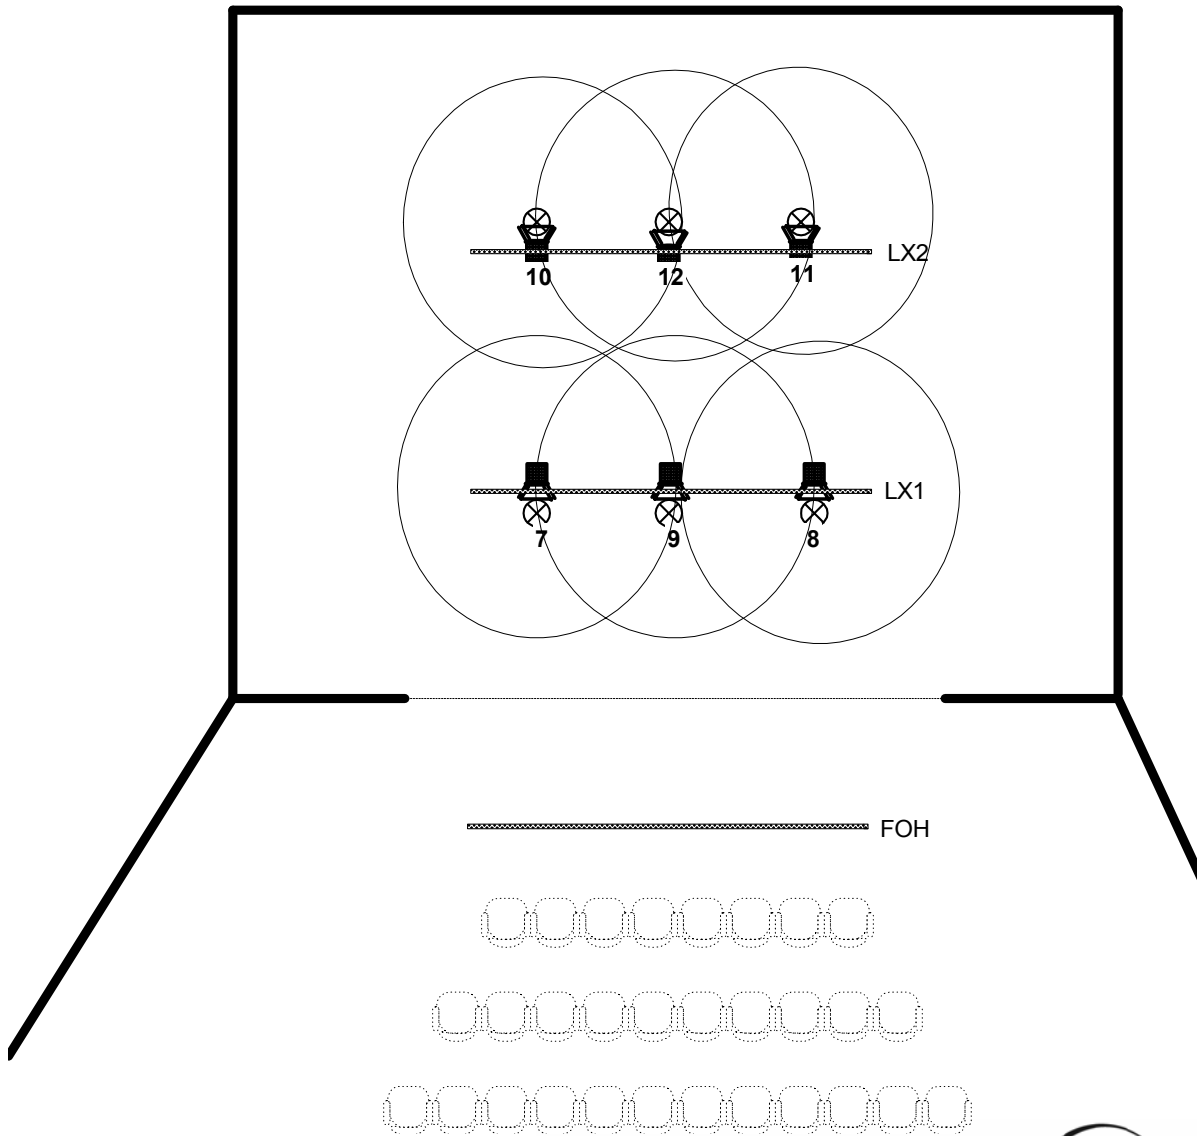

Caution: Use safety cables from the fixture to the pipe

Strand Lighting (Canada)  
Inc/Eclairages Strand (Canada) Inc  
2430 Lucknow Drive No 15  
Mississauga Ontario L5S 1V3 Canada  
Tel: +1 905 677 7130 Fax: +1 905 677 6859



The Company reserves the right to make any variation in design or construction to the equipment described.  
© Strand Lighting Ltd. 2002  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.

