




U.L. Listed Union Made in the U.S.A.

Model 1155

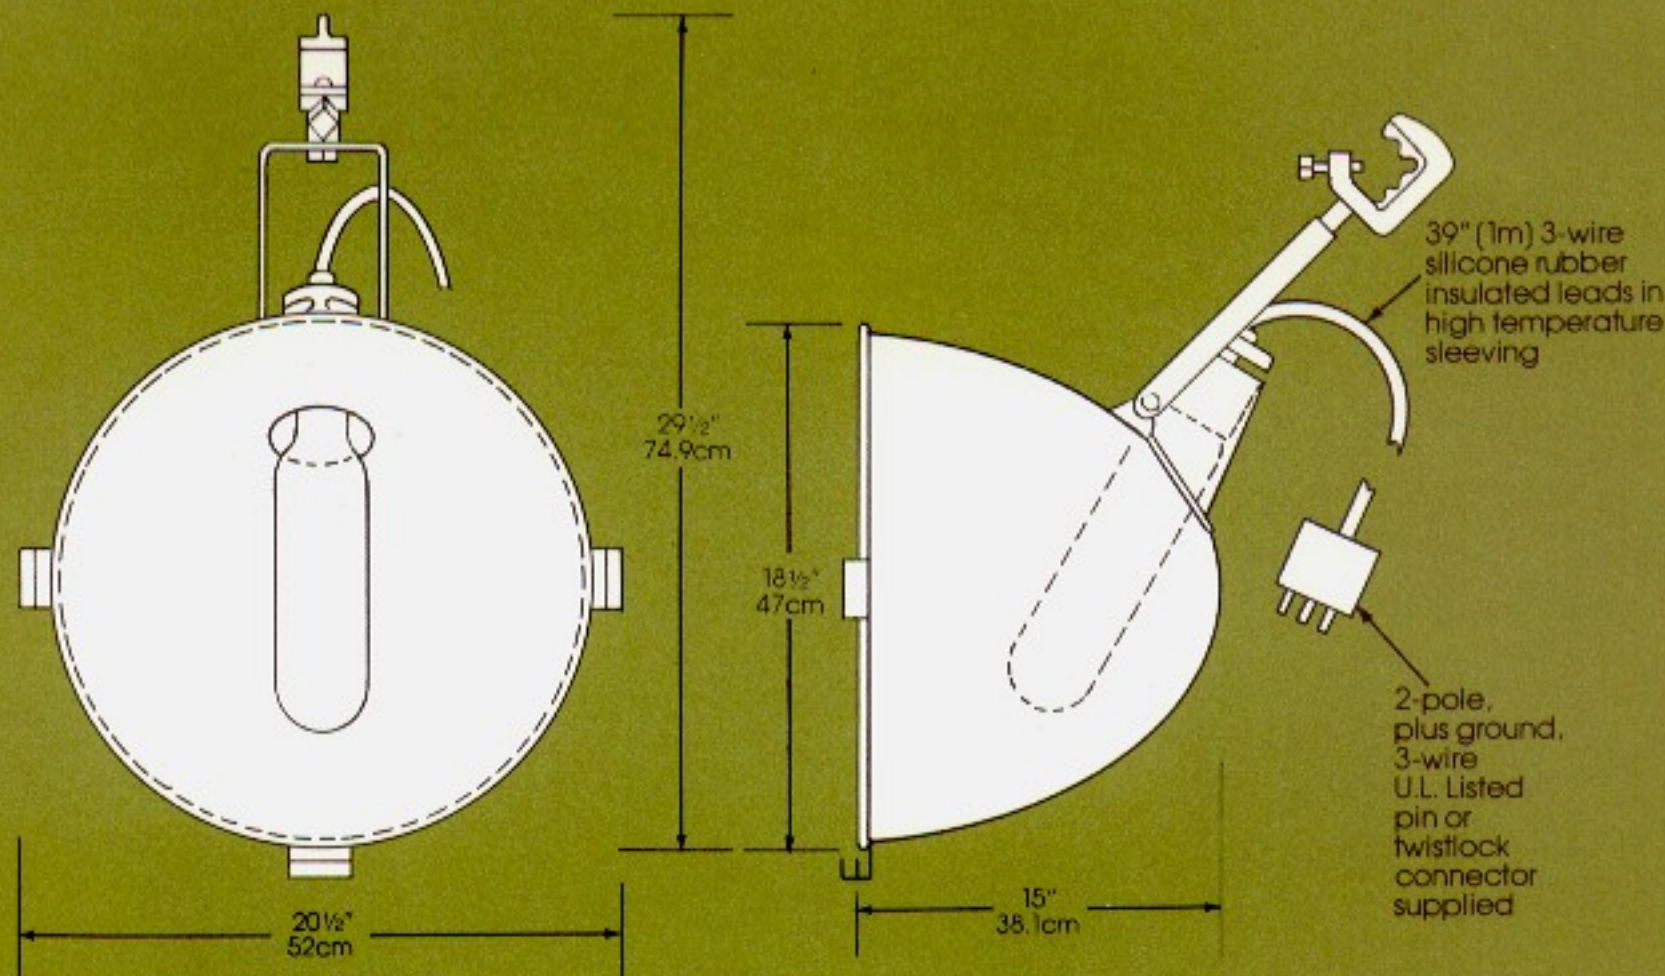

ILLUMINATION (LUX)	BWL	5513	1454	645
	DSF	4168	1342	463
	DSE	2742	685	304
THROW DISTANCE (METERS)		2	4	6
FIELD DIAMETER (METERS)		5.5	11	16.6

Flood Throw Distances and Field Diameter

106° FIELD ANGLE

FIELD DIAMETER (FEET)	13'4"	26'5"	40'	53'4"
THROW DISTANCE (FEET)	5	10	15	20
	BWL	930	232	103
	DSF	666	166	74
	DSE	438	110	48

Lamps

ANSI Code	Watts	Color Temp.	Avg. Rated Life Hrs.	Nom. Lumens
BWL	2000	3200°K	750	57,200
DSF	1500	3200°K	1000	41,000
DSE	1000	3050°K	750	27,000


Accessories

- 11155 Color frame
- 1850 "C" clamp (furnished as standard equipment)
- 1860C 18" "C" Clamp side arm
- 1415 18" Spoke base floor stand
- 1420 19" roller caster floor stand
- 110 Safety cable (furnished as standard equipment)
- 1867 Scenery clamp

Connectors

- 955G 2-pole, 3-wire, 20A pin connector
- TLG 2-pole, 3-wire, 20A twistlock connector (L5-20P)

Candlepower

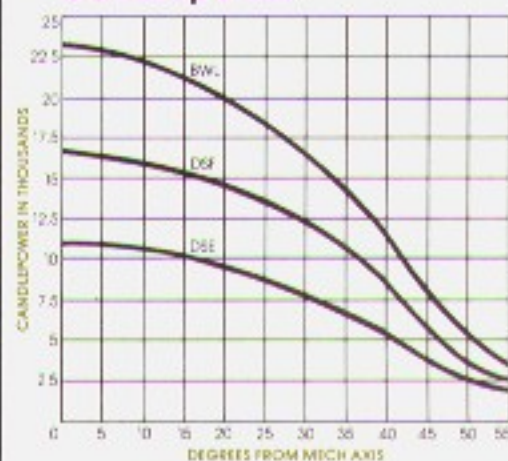

1000-2000 Watt
18" Scoop

Kliegl

Kliegl

Kliegl Bros.
32-32 48th Ave.
Long Island City
New York 11101
212/786-7474
Telex: 960158

©1977 Kliegl Bros.
Printed in U.S.A.