


10° Field angle spot

Model 3440


500-1000 Watt 11" Klieglun Beam Projector




U.L. Listed Union Made in the U.S.A.

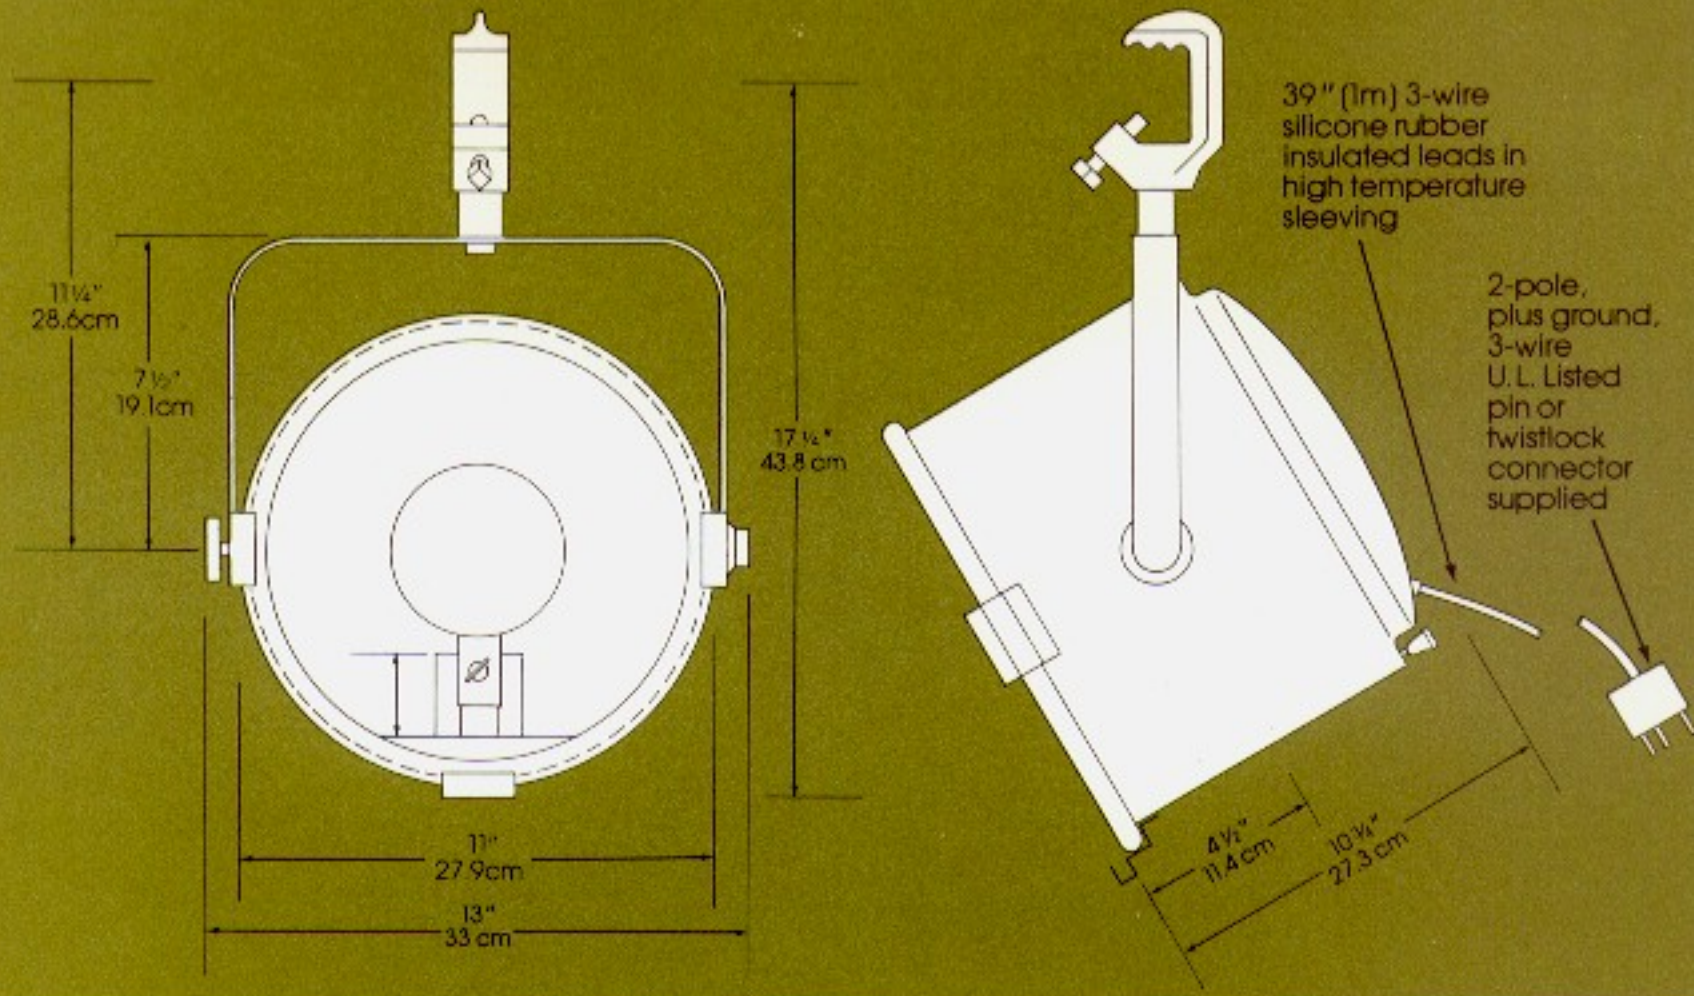


Flood Throw Distances and Field Diameter

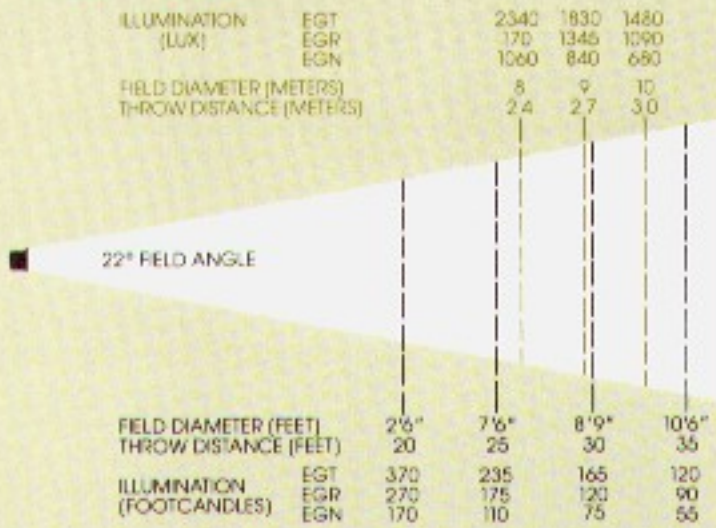


Flood Candlepower

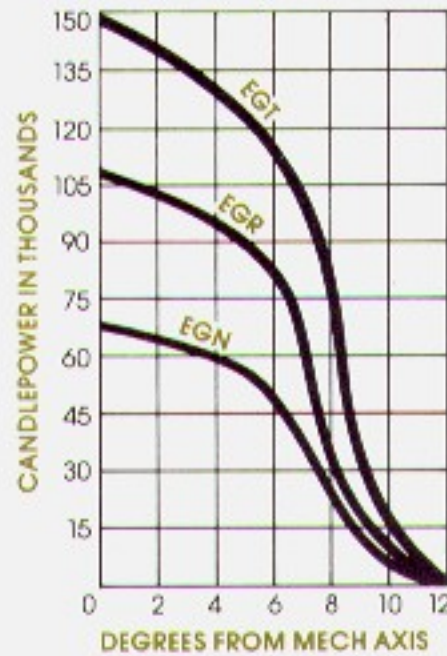

Spot Throw Distances and Field Diameter

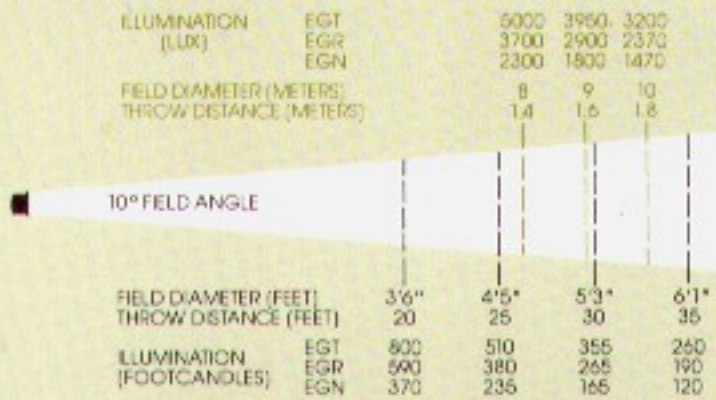

Spot Candlepower

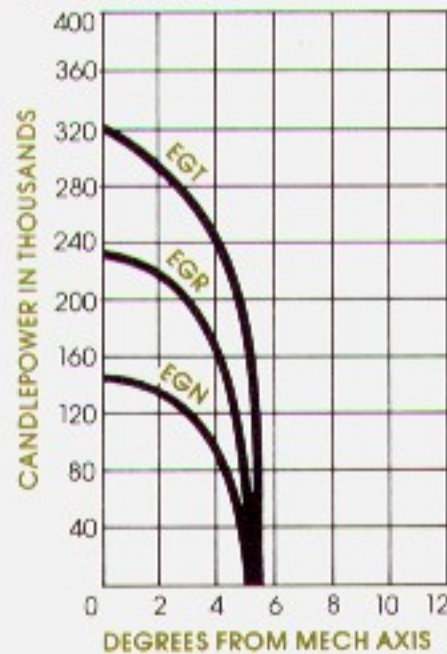

Lamps

| ANSI Code | Watts | Color Temp. | Avg. Rated Life Hrs. | Nom. Lumens |
|-----------|-------|-------------|----------------------|-------------|
| EGT | 1000 | 3200°K | 200 | 28,500 |
| EGR | 750 | 3200°K | 200 | 21,000 |
| EGN | 500 | 3200°K | 100 | 13,000 |

Accessories

- 13440 Color frame
- 1850 "C" clamp (furnished as standard equipment)
- 1860C 18" "C" clamp side arm
- 1415 18" Spoke base floor stand
- 1420 19" roller caster floor stand
- 110 Safety cable (furnished as standard equipment)
- 1867 Scenery clamps

Connectors

- 955G 2-pole, 3-wire 20A pin connector
- TLG 2-pole, 3-wire 20A Twistlock connector (L5-20P)



Kliegl Bros.
32-32 48th Ave.
Long Island City
New York 11101
212-786-7474
Telex: 960158

© 1978 Kliegl Bros.
Printed in U.S.A.