

Ventilated, sheet steel & aluminum housing

"C" clamp (for pipes up to 2") standard, other mounting options available

Steel yoke

Two, single-pole recessed-contact sockets for quick, easy relamping

Easy secure tilt adjustment (without tools) with cool, heat-resistant phenolic knobs

Durable, crystallized baked finish

Choice of 300, 500 and 1000-watt constant-color Tungsten-halogen lamps

16" matte Alzak® aluminum reflector

Color-frame grooves with locking screw


A broad, high output

positioning, adjustment and

standard "C" clamp


U.L. Listed Union Made in the U.S.A.

Model 3451

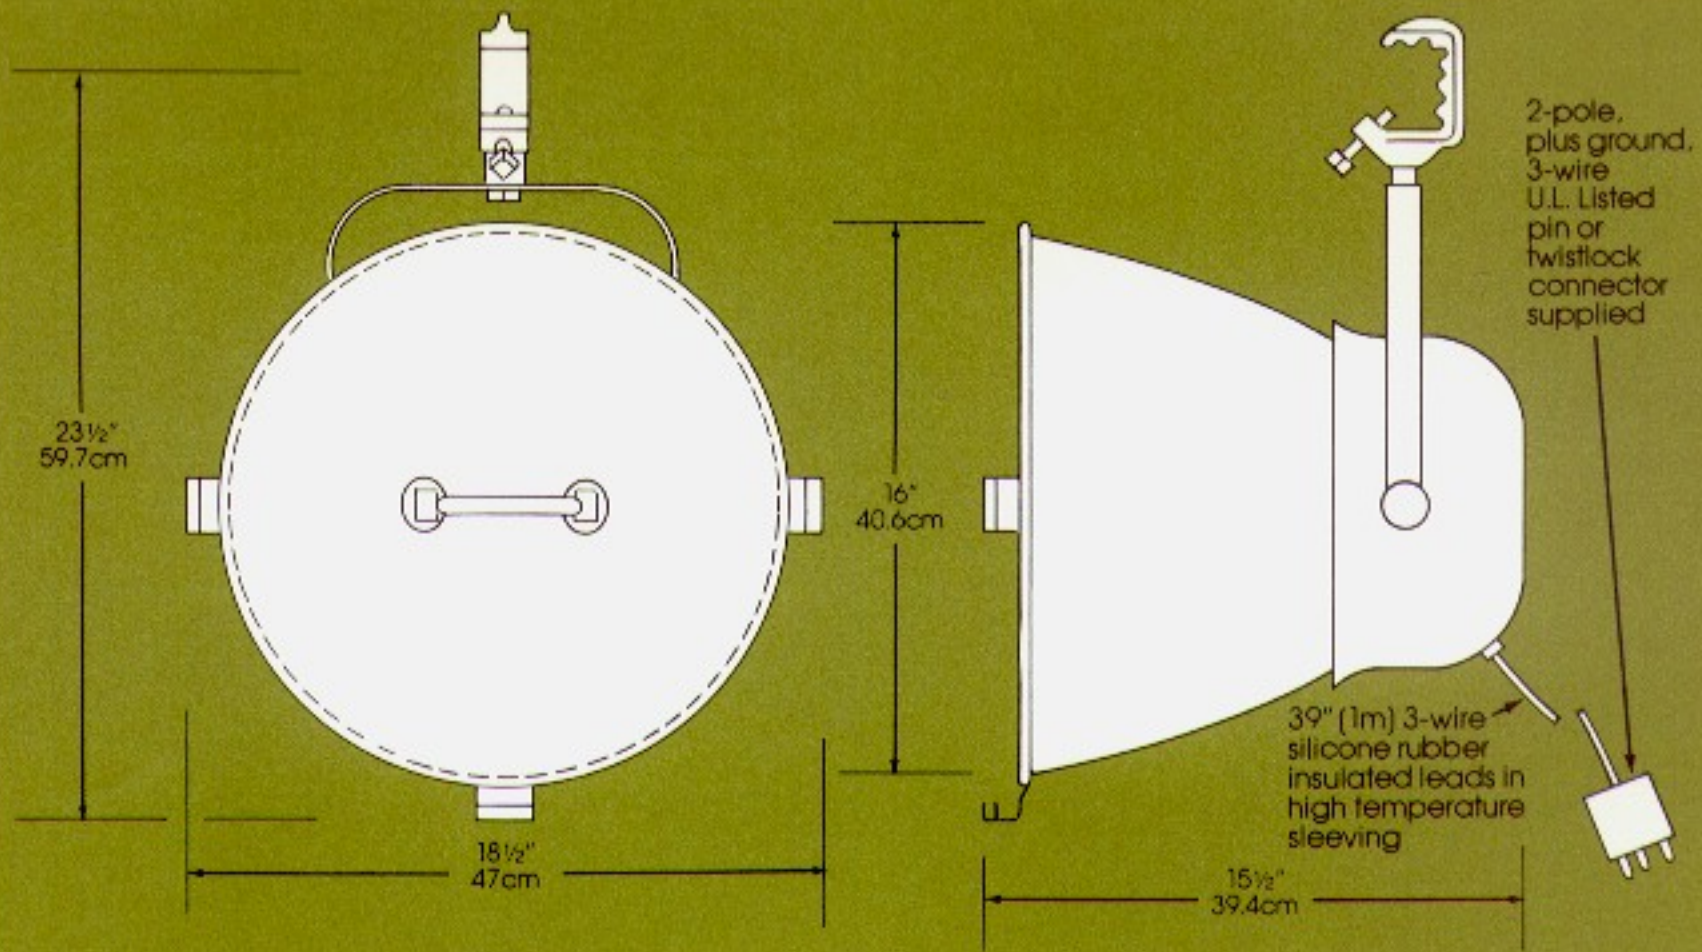

ILLUMINATION (LUX)	FHM	3744	936	426
	FDN	1752	440	190
	FCZ	854	320	140
	EHZ	408	202	88
THROW DISTANCE (METERS)		2	4	6
FIELD DIAMETER (METERS)		5	10	15

Flood Throw Distances and Field Diameter

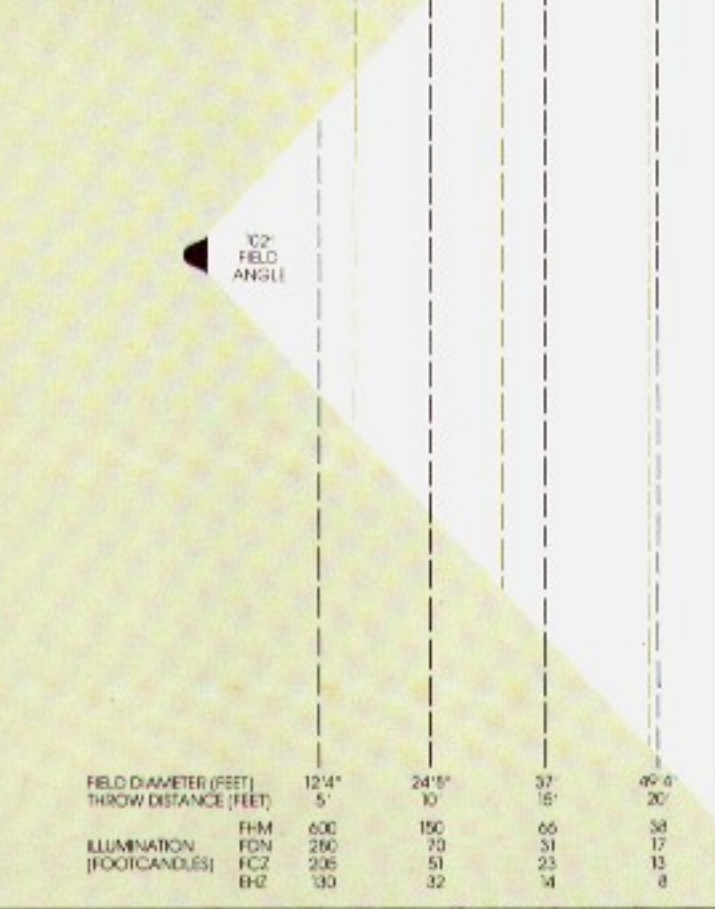

FIELD DIAMETER (FEET)	12'4"	24'8"	37'15"	49'0"
THROW DISTANCE (FEET)	5'	10'	15'	20'
ILLUMINATION (FOOTCANDLES)	FHM 600	150	66	38
	FDN 280	70	31	17
	FCZ 205	51	23	13
	EHZ 130	32	14	8

Lamps

ANSI Code	Watts	Color Temp.	Avg. Rated Life Hrs.	Nom. Lumens
EHZ	300	2950°K	2000	5,900
FCZ	500	3000°K	2000	9,300
FDN	500	3200°K	400	12,800
FHM	1000	3200°K	300	27,300


Accessories

- 13451 Frame for diffusion & color media
- 1850 "C" clamp (furnished as standard equipment)
- 1860C 18" "C" clamp Side Arm
- 1415 18" Spoke base floor stand
- 1420 19" roller caster floor stand
- 110 Safety cable (furnished as standard equipment)
- 1867 Scenery clamp

Connectors

- 955 G 2-pole, 3-wire 20A Pin Connector
- TLG 2-pole, 3-wire 20A Twistlock Connector (L5-20P)

Candlepower

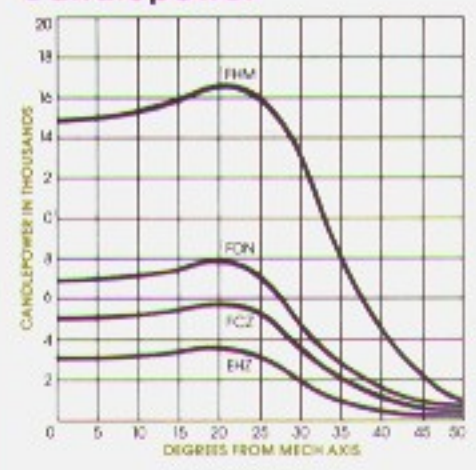

300-1000 Watt
16" Scoop

Kliegl

Kliegl

Kliegl Bros.
32-32 48th Ave.
Long Island City
New York, 11101
212/786-7474
Telex: 960158

© 1977 Kliegl Bros.
Printed in U.S.A.