


Kliegl 2000-5000 Watt 12" Fresnel

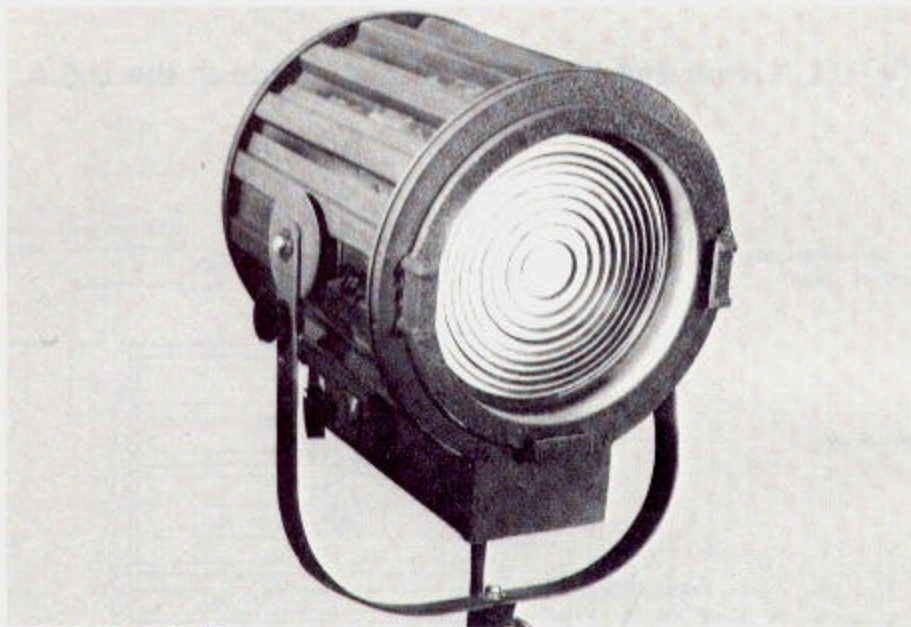

SPECIFICATIONS

Fresnel lens spotlights consisting of a sheet steel shell housing reinforced for highest unit strength and masked with efficient light baffles; supported by an iron yoke with spring tension tilt adjustment, and of sufficient length to allow 360 degree rotation; a heat resistant knob for pressure actuated tilt locking; lever actuated focusing mechanism with single heat resistant knob located on one side and to the rear of the fixture; SPOT and FLOOD position indicator on housing side; insulated positioning handle located at rear of fixture; an Alzak® aluminum spherical reflector on a movable carriage; color frame grooves; a safety chain loop, one mogul bi-post lamp socket for tungsten-halogen lamps, 2000, 5000 watt; a 12" Pyrex® heat resisting Fresnel lens in a side hinged front door, with spring-loaded pin type latch for easy relamping and 36" silicone insulated leads properly stripped and tinned within a high temperature fabric sleeve and fitted with a 2 pole, 3 wire grounded male connector. Each unit shall be equipped with a "C" pipe clamp and a safety cable.

Using a CYX 2000 watt 250 hour lamp, this unit shall produce a field angle of 24 degrees in the SPOT position and 74 degrees in the FLOOD position which equals or exceeds 151,000 candle power in the SPOT position and 25,000 candle power in the FLOOD position. Units shall be Kliegl #3612 Fresnel spotlight.

Provide _____ KLIEGL #3612(F) fixture(s) with _____ color frame and _____ lamp(s) with ANSI code # _____.

NOTES


3612F (Film Version) with Switch

Fill in Project Information Here

Kliegl Model 3612


QUICK SELECTOR

SPOT




TYPICAL THROW DISTANCE
5-20 meters; 20-60 feet
Field Dia. (F) = Throw Dist

FLOOD

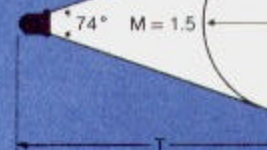

TYPICAL THROW DISTANCE
4-10 meters; 10-30 feet
Field Dia. (F) = Throw Dist

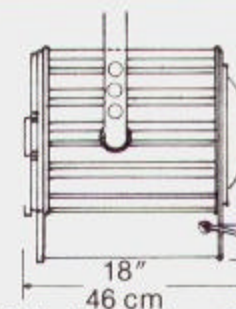

Weight: 38 Lbs. 17

ACCESSORIES

13612	Color Frame
23612	8 Way Barndoor
1850	"C" Clamp (furnish standard equipment)
1860C	18" "C" Clamp Si
1415	18" Spoke Base F
1422	30" Roller Caster
1440	18" Table Base







CONNECTOR

All configurations are U.I.

955G	2 Pole 3 Wire 20A Connector
TLG	2 Pole 3 Wire 20A Connector (L5-20)
957C	2 Pole 3 Wire 60A

Independent Lab. Data

U.L. Listed and Labeled Union Made in the U.S.A.

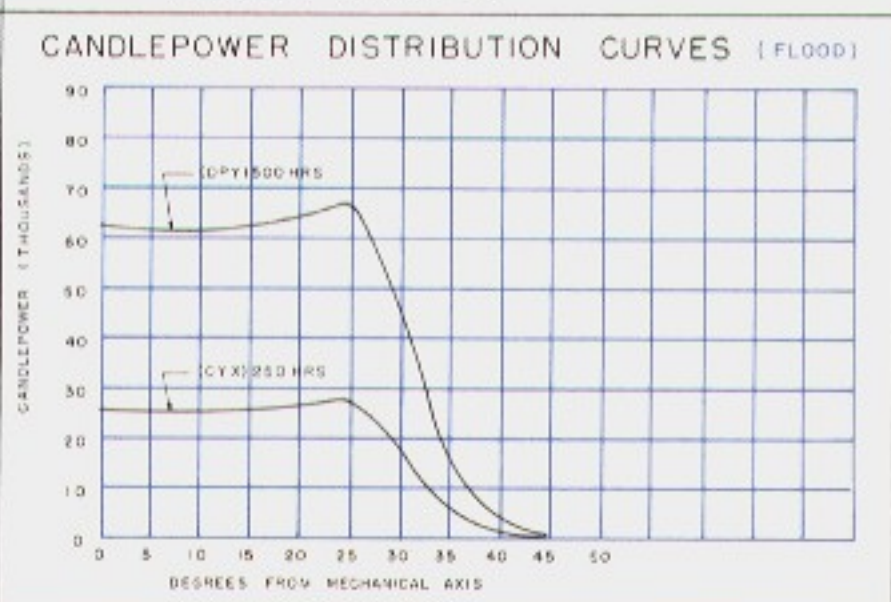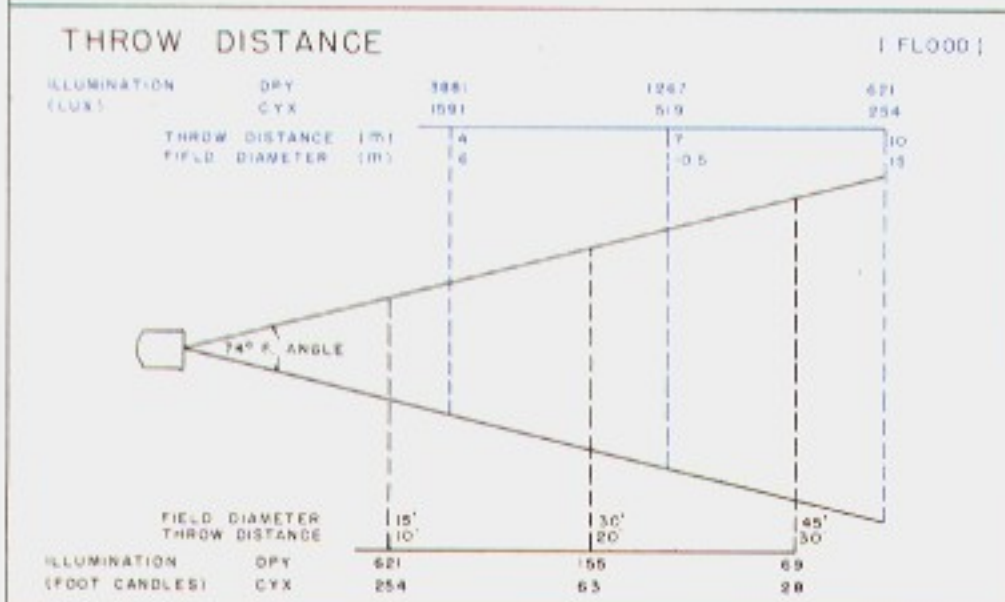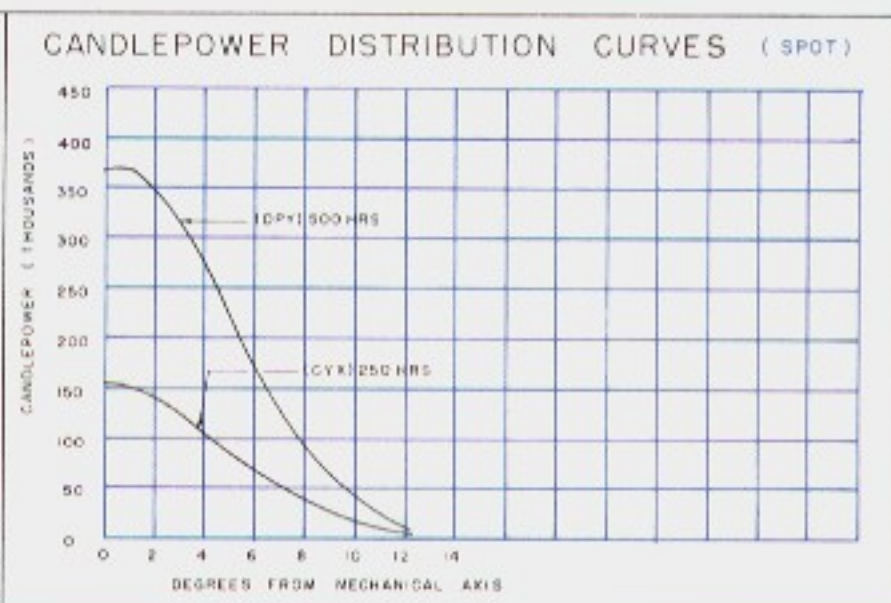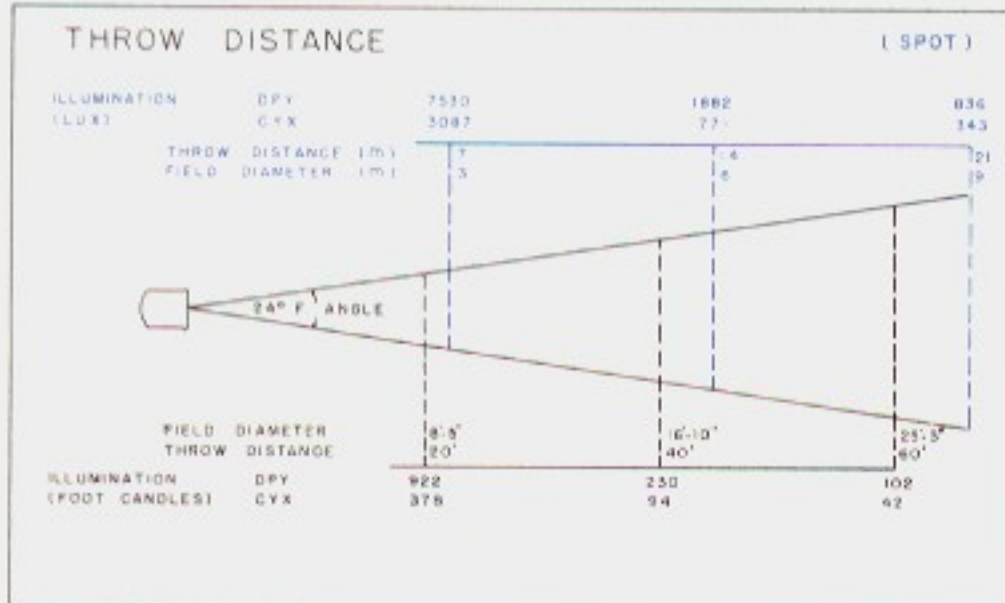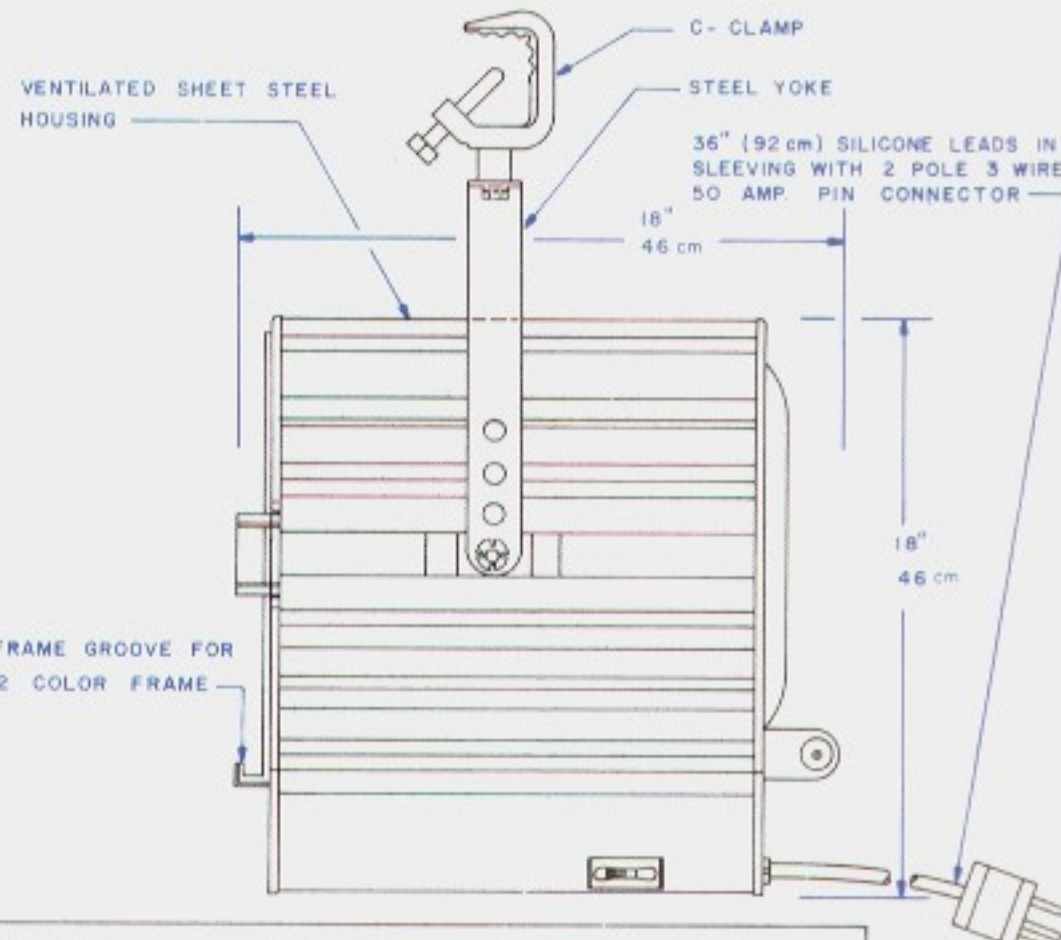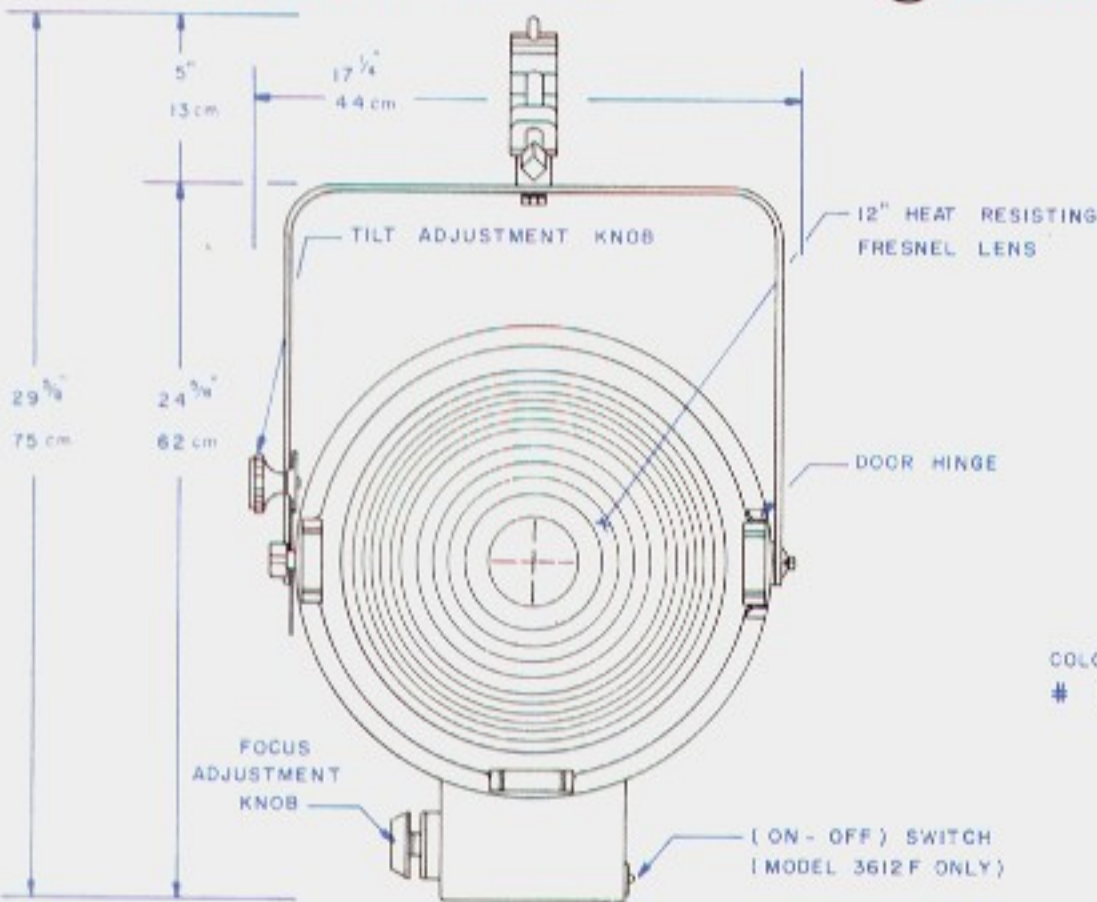

LAMP INFORMATION

LAMP ANSI CODE	WATTS	VOLTS	BULB	LIFE [HOURS]	° K	LUMENS
CYX	2000	120	T-9 1/2	250	3200	59,000
DPY	5000	120	T-17	500	3200	143,000



32-32 48th AVENUE, LONG ISLAND CITY, NEW YORK 11101
TEL: (212) 786-7474
TLX: 960158