



FOR DETAILED INFORMATION CONCERNING THE TRULY DISTINCTIVE LINE OF KLIEGL ARCHITECTURAL LIGHTING FIXTURES, WE SUGGEST YOU SEND FOR CATALOG NO. A-11.

This instructive catalog details dozens of lighting units which were designed to fully meet all the exacting requirements of today's architectural era. Contained are exit lights, aisle lights, angular and vertical downlights, picture lights as well as units for theatre lobbies, homes, hotels, casinos, institutions, schools, churches, etc. Illustrations, charts, engineering data as well as information concerning better lighting are but a part of this inclusive catalog.

For requests for catalogs or further information, write to:

Kliegl Bros.
Architectural Division
321 West 50th St.
New York 19, N. Y.

GENERAL INFORMATION

PRICE QUOTATIONS

Prices shown on all price lists are subject to change without notice. Prices include domestic packing and orders are shipped F.O.B. our factory in New York City. Minimum billing \$3.00. List prices do not include transportation charges.

ORDERING

All orders must be in writing. To avoid error, give as many details as possible i.e. Catalog numbers, name, type, size, color (if any) etc. If ordering accessories, give unit name and catalog number of unit on which accessories will be used in addition to proper ordering information.

SPECIAL NOTE

This catalog shows the exact equipment which is included with each particular unit. Additional equipment such as lamps, connectors, ground wire, color frames etc. are not normally included and must be ordered in addition at prices as shown on current price list.

SHIPPING INSTRUCTIONS

Send shipping instructions with order. In absence of shipping instructions, our shipping department will use their own best judgment.

CLAIMS

All claims must be made within 10 days of receipt of goods. Experienced packers are employed, therefore, our responsibility ceases when material is receipted for in good condition by transportation company. Consignees must hold carrier responsible for breakage, damage, loss or delay in transit.

RETURNS

Do not return goods before receiving our approval. When writing, mention date and number of original invoice. Goods returned must be properly marked, sent prepaid and are subject to a charge for handling.

RENTALS

A selected stock of equipment is kept on hand for rental at contract rates. Lessee must pay all transportation charges and is responsible for all damage to materials, ordinary wear and tear excepted, from time materials leave factory until returned. Rental period extends from the day the material leaves the factory until the day it is returned to the factory.

GUARANTEE

All Kliegl products are sold with full guarantee. Any defects in material or workmanship will be promptly rectified, provided claims are made within 10 days of receipt of goods and defective parts returned to us for examination, charges prepaid. No other claims for damages, labor or material will be allowed.

TERMS

Terms for domestic shipments are: Net 30 days to parties of established credit. Goods will be sent C.O.D. if a deposit of not less than 25% of the purchase is remitted with an order.

Terms for foreign shipments are: Irrevocable letter of credit established with a bank designated by Kliegl Bros. for payment (cash against shipping documents) in New York in New York funds.

ALPHABETICAL INDEX (cont.)

	Page
Safpatch	44
Traveling	51
Kliegladders	71
Klieglights	
Introduction	6
Pattern Projectors	11
Pattern Projector Slides	11
Remote Color Control	14
Series 1163-1164-1165-1167	10
Series 1365	7
Series 1366-1368	8
Series 1373-1374-1375	9

L

Ladders	71
Lamp Coloring	75
Lamps, Incandescent	74
Lenses	
Achromatic	66
Condensing	73
Fresnel	73
Objective	66
Step	73
Stereopticon	66
Light Fixtures, Musicians	68
Light Towers	71
Lightning Shutters	67
Linnebach Scene Projectors	64
Load End Box	71
Lugs, Solderless	74

M

Magnetic Amplifier Kliegboard	48
Main Switches	69
Memory Switching System	46
Multi-pole Connectors	57
Multiple Circuit Connectors	58
Musicians Lights	
Baton, Lighted	68
Light Fixtures	68
Music Stands	68
Piano & Organ Lights	68

O

Objective Lenses	66
Organ Light	68
Outlets, Power Service	62
Oval Beam Fresnel Spotlights	16

P

Panel Pockets	62
Pattern Projectors	11

	Page
Permanent Footlights	26
Piano Light	68
Pin-plug Connectors	56
Pipe Clamp Side Arms	70
Pipe Clamps	70
Plano-convex Spotlights	20
Plug Receptacles	63
Plugging Boxes, Portable	59
Plugging Strips, Batten	30
Plugs, Heavy Duty	63
Pockets	
Floor Pockets—Connector Type ..	61
Floor Pockets—Plug Type	61
Panel	62
Wall Pockets—Flush Type	60
Wall Pockets—Surface Type	60
Waterproof	61
Portable	
Borderlights	29
Distribution Units	62
Footlights	26
Worklights	69
Power Service Outlets	62
Projectors, Scene & Effect	64
Proscenium Lights	31

R

Receptacles, Plug	63
Rectangular Plate Dimmers	50
Reflectors, Alzak	74
Remote Color Control	14
Resistors, Arc	36
Roller Caster Stands	71
Rotoflector Kliegboards	42
Round Beam Fresnel Spotlights ...	17
Round Plate Dimmers	50
Roundels, Color	75
Rubber Covered Cable	76

S

Safpatch Kliegboards	44
Scene Projectors	
Linnebach Type	64
Stereoptic Type	65
Sciopticon Effect Projector	64
Sciopticon Effects	67
Service Extensions	
Branch-off Connectors	58
Distribution Units, Portable	62
Multiple Circuit Connectors	58
Plugging Boxes, Portable	59

	Page
Service Outlets, Power	62
Shutters & Barn Doors	72
Signaloid Coloring Solution	75
Single Pole Connectors	56
Slide Carriers & Adaptors	66
Slide Changers	
Automatic	65
Manual	66
Slides, Pattern Projectors	11
Solderless Lugs	74
Spotlight Effects	67
Spotlights	
Arc	36
Booth	32
Fresnel Lens	18
Klieglights	6
Plano-convex	20
Stage Cable	76
Stage Floodlights	22
Stage Floor Pockets	61
Stands & Brackets	70
Stands, Musicians	68
Step Lenses	73
Stereoptic Slide Projectors	65
Stereopticon Lenses	66
Strip Floodlights	31
Supports, Cable	70
Surface Wall Pockets	60
Switches, Enclosed	69

T

Table Bases	70
Telescopic Floor Stands	71
Three Pole Connectors	57
Tormentor Spotlights	31
Traveling Kliegboards	51
Two Pole Connectors	56

U

Utility Floodlights	22
---------------------------	----

W

Wall Outlet Connectors	58
Wall Brackets	70
Wall Pockets	60
Waterproof Floor Pockets	61
Weatherproof Coloring	75
Wheels, Color	73
Wire & Cable	76
Worklights, Portable	69

ALPHABETICAL INDEX

A

	Page
Achromatic Lenses	66
Adaptors, Slide	66
Alzak Reflectors & Holders	74
Arc Carbons	74
Arc Lamp Parts	36
Arc Resistors	36
Arc Spotlights	36
Armored Cable Connectors	58
Asbestos Covered Wire	76
Automatic Slide Changers	65
Autotransformer Dimmers	50
Autotransformer Kliegboards	
Manually Operated	38
Motor Operated	49
Autotransformers — Motor Driven	
Superior	51
Ward Leonard	51

B

Barn Doors	72
Baton, Lighted	68
Batten Plugging Strips	30
Battery Charging Connectors	58
Booster Switches	69
Booth Spotlights	32
Borderlight Cable	76
Borderlights	28
Box, Load End	71
Boxes, Color	73
Boxes, Portable Plugging	59
Brackets & Stands	70
Branch-off Connectors	58

C

Cable Supports	70
Cable & Wire	76
Carbons, Arc	74
Carriers, Slide	66
Chandelier Connectors	58
Cinemoid	75
Clamps, Pipe	70
Color Boxes	73
Color Frames	72
Color Mediums	
Cinemoid	75
Colored Glass	75
Colorine Remover	75
Coloring Solution	75
Gelatine	75
Glass Roundels	75

Page

Signaloid	75
Weatherproof Coloring	75
Color — Control Klieglights	15
Color Wheels	73
Condensing Lenses	73
Connectors	
Armored Cable	58
Battery Charging	58
Branch-off	58
Chandelier	58
Four Pole	57
Grounded	57
Multi-pole	57
Multiple Circuit	58
Single Pole	56
Three Pole	57
Two Pole	56
Wall Outlet	58
Crystal Shower Effects	67
Cyclorama Lights	30

D

Dimmers	
Individual, Manual	
Autotransformer	50
Individual, Resistance Type	50
Motor Driven, Autotransformer.	51
Disappearing Footlights	24
Dissolvers, Iris	72
Distribution Units, Portable	62
Dyna-beam Klieglights	33

E

Effects	
Crystal Showers	67
Electro-Mechanical	67
Sciopticon	67
Spotlight	67
Effect Holders	66
Effect Projectors, Sciopticon	64
Enclosed Switches	69

F

Floodlights	
Hanging	23
Kliegsun	22
Portable, Work	69
Scoops	22
Standing	23

Page

Strip	31
Utility	22
Floor Pockets	
Connector Type	61
Plug Type	61
Waterproof	61
Flush Wall Pockets	60
Footlights	
Disappearing	24
Permanent	26
Portable	27
Four-pole Connectors	57
Frames, Color	72
Framing Shutters	72
Fresnel Lenses	73
Fresnel Lens Spotlights	16
Frontlights	12

G

Gelatine	75
Glass, Natural Colored	75
Glass Roundels	75
Grounded Connectors	57

H

Hanging Floodlights	23
Heavy Duty Plugs	63
Holdes, Effect	66
Holdes, Reflectors	74

I

Illusions, Stage	67
Incandescent Lamps	74
Individual Dimmers	
Manual Autotransformers	50
Resistance	50
Iris Dissolvers	72
Iris Shutters	72

K

Kliegboards	
Introduction	37
Kliegtronic	40
Magnetic Amplifier	48
Manually Operated	
Autotransformer	38
Motor Operated Autotransformer	49
Preset Memory Switching System	46
Rotolector	42

NUMERICAL INDEX (cont.)

No.	Page	No.	Page	No.	Page	No.	Page	No.	Page	
1366A	8	1438	70	2169BAC/4 ..	15	5310E	20	SUPERIOR		
1366B	8	1439	70	2170	13	5906	28			
1366BAC/2 ..	15	1440	70	2170BAC/4 ..	15	5950	57		D1000R	50
1366BAC/4 ..	15	1443	70	2170N	13	5950A	57		D1000H	50
1366C	8	1444	70	2170NBAC/4 ..	15	5950B	57		D2000	50
1366CR	8	1445	70	2171	13	5950C	57		D5000	50
1366E	8	1446	70	2171BAC/4 ..	15	6106ACP	28		D2000-2E	50
1366P	11	1447	70	2171N	13	6106CP	28		D5000-2E	50
1366PA	11	1466	36	2171NBAC/4 ..	15	6352	70		D5000-2P	50
1366PB	11	1467	36	2185B3	13	6362	70		D2000-3E	50
1366PC	11	1467A	36	2185B3N	13	6950	57		D5000-3E	50
1366PCR	11	1468	36	2185B4	13	6950A	57		D5000-3P	50
1366PE	11	1469	36	2185B4N	13	6950B	57		DMZ2000	51
1366PW	11	1469A	36	2186B3	13	6950C	57		DMZ5000	51
1366PWA	11	1470	36	2186B3N	13	8950A	57		DMZ2000-2E	51
1366PWB	11	1471	36	2186B4	13	8950B	57		DMZ5000-2E	51
1366PWC	11	1674	65	2186B4N	13	8950C	57		DMZ2000-3E	51
1366PWCR ..	11	1674A	65	2256	72				DMZ5000-3E	51
1366PWE	11	1676	65	2260	72				DMZ2000-4E	51
1366WBAC/2 ..	15	1676A	65	2301	63	P-93	63		DMY5000-4E	51
1366WBAC/4 ..	15	1677	65	2302	63	P-93C	63			
1368	8	1678	65	2307	60	P-95	63	WARD LEONARD		
1368A	8	1683	65	2307G	60	P-95A	63			
1368B	8	1684	65	2308	60	P-95C	63		76-37M11	51
1368BAC/2 ..	15	1850	70	2310	60	P-96	63		76-37M21	51
1368BAC/4 ..	15	1850A	70	2310G	60	P-97	63		76-37LM31	51
1368C	8	1850B	70	2311	60	P-97A	63		76-37LM41	51
1368CR	8	1850C	70	2362B	73	P-97C	63		76-37RH10	50
1368E	8	1852	70	2363B	73	P-445	63		76-37RH11	50
1373	9	1852A	70	2436	71	P-447	63		76-37RH20	50
1373B	9	1860	70	2436G	71	P-448	63		76-37RH21	50
1373CR	9	1860A	70	2950	58	P-449	63		76-37RH30	50
1373E	9	1860B	70	2955	58				76-37RH31	50
1374	9	1860C	70	3301	63				76-38M11	51
1374B	9	1945	75	3307	60				76-38M21	51
1374CR	9	1950	56	3310	60	CINEMOID			76-38LM31	51
1374E	9	1955	56	3311	60	1-60	75		76-38LM41	51
1374P	11	1956	56	3350	61				76-43M11	51
1374PB	11	1974	75	3352	61	GELATINE			76-43M21	51
1374PCR	11	1975	75	3950	57	G:O-80	75		76-43M31	51
1374PE	11	1976	75	3955	57				76-43LM41	51
1374PW	11	1978	75	3956	57				76-43RH10	50
1374PWB	11	1980	75	3957	57				76-43RH11	50
1374PWCR ..	11	2048	64	3957G	57				76-43RH20	50
1374PWE	11	2049	64	3958	57				76-43RH21	50
1375	9	2061B	73	3958G	57				76-43RH30	50
1375B	9	2062B	73	3959	57				76-43RH31	50
1375CR	9	2063B	73	4301	63					
1375E	9	2064B	73	4307	60					
1376	33	2065B	73	4307G	60					
1377	33	2066B	73	4310	60					
1402	71	2067B	73	4310G	60					
1410	71	2070B	73	4350	61					
1411	71	2071B	73	4950	57					
1414A	71	2071WB	73	4955	57					
1415	71	2072B	73	4956	57					
1420	71	2073B	73	4957	57					
1421	71	2074B	73	4957G	57					
1422	71	2165	13	4958	57					
1427	71	2165BAC/4 ..	15	5310	20					
1430	71	2167	13	5310A	20					
1431	71	2167BAC/4 ..	15	5310B	20					
1437	70	2169	13	5310C	20					

NUMERICAL INDEX (cont.)

No.	Page	No.	Page	No.	Page	No.	Page	No.	Page
548	23	829	25	957N	56	1122E	22	1175	35
548A	23	832	25	958	56	1143	22	1178	34
566	72	838A	66	958AA	56	1143A	22	1179	34
566G	72	838B	66	958AC	56	1143B	22	1180	67
567	72	839	66	958G	57	1143C	22	1183	67
568	72	839A	66	959	56	1143CR	22	1183A	67
570	72	874	70	965	58	1143E	22	1185	67
570G	72	875	70	971	56	1155	22	1190	67
574	72	876	70	972	56	1155A	22	1191	67
577	72	877	70	973	56	1155B	22	1229	50
578	72	877A	70	974	56	1155C	22	1230	50
580	72	880	70	975	56	1155CR	22	1231	50
580G	72	890	73	976	56	1155E	22	1233	50
581	72	891	73	977	58	1158	22	1234	50
585	72	892	73	995	58	1158A	22	1235	50
585A	72	896	73	996A	58	1158B	22	1236	50
588	72	897	73	996B	58	1158C	22	1237	50
590C	28	898	73	996C	58	1158CR	22	1238	50
590CP	28	899	73	997	58	1158E	22	1239	50
597	31	901	73	998	58	1163	10	1240	50
598	31	902	73	999	58	1163A	10	1241	50
599	31	903	73	999N	58	1163B	10	1242	50
602	28	904	73	1000	58	1163E	10	1291	50
602C	28	905	73	1000N	58	1163W	10	1301	63
602CP	28	906	73	1001	58	1163WA	10	1307	60
603	28	907	73	1001N	58	1163WB	10	1310	60
610	28	909	73	1032	72	1163WE	10	1350	61
610A	28	910	73	1032G	72	1164	10	1365	7
610AC	28	911	73	1033	72	1164A	10	1365A	7
610ACP	28	912	73	1033G	72	1164B	10	1365B	7
610C	28	913	73	1036	72	1164E	10	1365BAC/2	15
610CP	28	914	73	1036G	72	1164W	10	1365BAC/4	15
619	30	915	73	1037	72	1164WA	10	1365C	7
620	27	916	73	1038	72	1164WB	10	1365CR	7
620A	27	917-12	73	1039	72	1164WE	10	1365E	7
620B	27	917-18	73	1078	72	1165	10	1365P	11
620BC	27	917-26	73	1078B	72	1165A	10	1365PA	11
620BCP	27	918-30	73	1078C	72	1165B	10	1365PB	11
620C	27	940	74	1080	72	1165C	10	1365PC	11
620CP	27	941	74	1080A	72	1165CR	10	1365PCR	11
621	27	941F	74	1081	72	1165E	10	1365PE	11
621A	27	944	74	1081A	72	1165W	10	1365PW	11
621B	27	945	74	1082	72	1165WA	10	1365PWA	11
629	27	945F	74	1082A	72	1165WB	10	1365PWB	11
635	70	946	74	1083	72	1165WC	10	1365PWC	11
636	70	947B	74	1083A	72	1165WCR	10	1365PWCR	11
646	69	947BF	74	1084	72	1165WE	10	1365PWE	11
647	69	950	56	1084A	72	1165/8	10	1365W	7
649	31	950AA	56	1085	72	1165/8A	10	1365WA	7
650	31	950AC	56	1086	72	1165/8B	10	1365WB	7
651	31	955	56	1087	72	1165/8C	10	1365WBAC/2	15
652	31	955AA	56	1088	72	1165/8CR	10	1365WBAC/4	15
653	69	955AC	56	1091	72	1165/8E	10	1365WC	7
654	69	955G	57	1091A	72	1167	10	1365WCR	7
655	69	956	56	1092	72	1167A	10	1365WE	7
744	68	956AA	56	1092A	72	1167B	10	1365/8	7
744WLF	68	956AC	56	1097	11	1167E	10	1365/8A	7
752	68	956G	57	1122	22	1167W	10	1365/8B	7
766	68	957	56	1122A	22	1167WA	10	1365/8C	7
768	68	957AA	56	1122B	22	1167WB	10	1365/8CR	7
769	68	957AC	56	1122C	22	1167WE	10	1365/8E	7
821	68	957G	57	1122CR	22	1174	35	1366	8

NUMERICAL INDEX

No.	Page	No.	Page	No.	Page	No.	Page	No.	Page
IN	23	43NS06CR	18	70E	20	244B	67	354/955	61
IN3	23	43NSO6E	18	71	20	244C	67	354/955G	61
2N	23	43P6	19	71A	20	244D	67	355	61
6N19	21	43P6A	19	71B	20	248	64	356	61
8N20	21	43P6B	19	71C	20	249	64	357	61
8N24	21	43P6C	19	71CR	20	256	72	358	61
11	36	43P6CR	19	71E	20	257	72	361	60
14	73	43P6E	19	75N	64	258	72	362	60
14AC	73	43PO6	18	77	67	262	66	363	60
14ACL	73	43PO6A	18	77A	67	264	66	364	60
15	73	43PO6B	18	78	67	267	66	366	60
15AC	73	43PO6C	18	83	67	268	66	367	60
15ACL	73	43PO6CR	18	90	67	269	66	368	60
16	73	43PO6E	18	94	67	270	66	369	60
16AC	73	43N8	19	98	67	271	66	371-2	62
17	73	43N8A	19	100	67	272	66	371-3	62
17AC	73	43N8B	19	103	67	273	66	372	62
17ACL	73	43N8C	19	104	67	274	66	374	62
18	36	43N8CR	19	105	67	275	66	375-2	62
22	73	43N8E	19	106	67	280	66	375-3	62
23	73	43NO8	18	107	67	281	66	389	63
24	73	43NO8A	18	108	67	282	66	401	59
26	73	43NO8B	18	112	67	283	66	403	59
26A	73	43NO8C	18	117	67	284	66	404	59
26DD	73	43NO8CR	18	122	67	285	66	405	59
31AC	73	43NO8E	18	132	67	285A	66	406	59
31ACL	73	43P8	19	135	67	286	66	407	59
33	72	43P8A	19	138	67	301	63	413B	36
33A	72	43P8B	19	150	67	301½	63	450	74
33B	72	43P8C	19	151	67	302	63	456	59
33C	72	43P8CR	19	154	67	307	60	456-3	59
33D	72	43P8E	19	155AE	67	308	60	456G-2	59
33E	72	43PO8	18	158	67	309	60	456G-3	59
35AC	73	43PO8A	18	161	67	310	60	456G-4	59
35ACL	73	43PO8B	18	164	67	311	60	457	59
43N3	19	43PO8C	18	168	67	312	60	457-3	59
43N3A	19	43PO8CR	18	175	67	313	60	457G-2	59
43N3B	19	43PO8E	18	176	67	315	63	457G-3	59
43N3C	19	43N12	19	179A	67	317	60	457G-4	59
43N3E	19	43N12A	19	181	67	318	60	459	74
43N6	19	43N12B	19	186	67	319	60	460	74
43N6A	19	43N12C	19	188	67	322	60	461	74
43N6B	19	43N12CR	19	192	67	323	63	470	74
43N6C	19	43N12E	19	195	67	324	60	471	74
43N6CR	19	43N16	19	196	67	325	63	474	59
43N6E	19	43N16B	19	201	67	327	60	475	59
43NO6	18	43N16CR	19	209	67	328	63	476	59
43NO6A	18	43N16E	19	209A	67	346-2	59	477	59
43NO6B	18	43N20	19	214	67	346-3	59	497	36
43NO6C	18	43N20CR	19	215	67	348	61	522	69
43NO6CR	18	43N20E	19	215A	67	349	61	523	69
43NO6E	18	49	75	224	67	350	61	525	69
43NS6	19	53	20	225	67	351	61	526	69
43NS6A	19	53A	20	228G	67	351/955	61	527	69
43NS6B	19	53B	20	229	67	351/955G	61	533A	22
43NS6C	19	53C	20	230	67	352	61	533B	22
43NS6CR	19	53E	20	233	67	352/955	61	533E	22
43NS6E	19	70	20	237	67	352/955G	61	537A	22
43NSO6	18	70A	20	238*	67	353	61	537B	22
43NSO6A	18	70B	20	239	67	353/955	61	537E	22
43NSO6B	18	70C	20	240	67	353/955G	61	546	23
43NSO6C	18	70CR	20	244A	67	354	61	547	23

KLIEGL CABLE AND WIRE

Listed below are some of the more popular types of cable and wire carried in stock by Kliegl Bros. at all times. In addition to the listed conductors, a large stock of special types and styles is maintained to meet individual requirements. Full particulars concerning any cable or wire specification sent upon request.

BORDERLIGHT CABLE

Multiple conductor, color coded, flexible cable (types K and S) of approved N.E.C. Standard. Borderlight cable is made up in sizes with from 6 to 28 conductors of No. 12 gauge stranded flexible cable — as shown in listing, carried in stock. Single conductor cables also carried in stock so that other sizes and combinations can readily be made to order.

Number of Conductors	Size of Cable B&S No.	Carrying Capacity Amperes
6	12	N.E.C. STANDARD
8	12	" "
12	12	" "
18	12	" "
20	12	" "
24	12	" "
28	12	" "

STAGE CABLE

Exceptionally flexible, stage cable (type K) is made up of a large number of fine copper strands bound together; insulated with rubber and a tough braided covering without stiffening compounds of any kinds. National Electric Code Standard. Carried in following stock sizes — other sizes made to order.

Size of Cable B&S No.	Description	Carrying Capacity Amperes
14	2-CONDUCTOR	15
12	2- "	20
10	2- "	25
8	2- "	35
6	2- "	45
4	2- "	60
2	2- "	80
1	2- "	91
0	2- "	105
00	2- "	120
0000	2- "	160
8	3- "	70
6	3- "	100
4	3- "	140
2	3- "	180

HEATER CORD

Two conductor, heat resistant, flexible cord, with asbestos wrap and black cotton braid, suitable for relatively low wattage lighting apparatus.

ALL-RUBBER COVERED CABLE

2 and 3 conductor flexible stranded cable (type S) with a very durable all-rubber covering made to withstand harsh treatment.

Size of Cable B&S No.	Description	Carrying Capacity Amperes
16	2-CONDUCTOR	10
14	2- "	15
12	2- "	20
10	2- "	25
8	2- "	35
6	2- "	45
4	2- "	60
14	3- "	15
12	3- "	20
10	3- "	25
8	3- "	35
6	3- "	45
4	3- "	60

ASBESTOS-COVERED WIRE

Single-conductor, extra flexible, asbestos-covered wire (type AA). Should not be confused with ordinary "flexible" wire. This type is made up of a large number of fine strands of copper wire with an inner acetate separator and an outer covering of asbestos wrap, which does not burn or carry flame. Especially well suited for stage and motion picture lighting apparatus.

Size of Cable B&S No.	Description	Carrying Capacity Amperes
16	Single Conductor—extra flexible	10
14	" " " "	30
12	" " " "	45
10	" " " "	60
8	" " " "	80
6	" " " "	105
4	" " " "	140
2	" " " "	185
1	" " " "	220
0	" " " "	255

Size of Cable B&S No.	Description	Carrying Capacity Amperes
16	2-CONDUCTOR	6
14	2- "	15

KLIEGL COLOR MEDIUMS

Cinemoid®

Extra strength heat resisting, waterproof color filters. Average length of service life is several times regular gelatine filters. For spotlights or floodlights of all wattages. Clean, even coloring throughout entire sheet. Standard size 20" x 24". When ordering, specify word "Cinemoid" as well as appropriate catalog number.

COLOR	NO.	COLOR	NO.
Pale Yellow	50	Pale Violet	42
Canary	49	Mauve	26
Yellow	1	Purple	25
Straw	3		
Light Amber	2	Steel Blue	17
Medium Amber	4	Pale Blue	40
Deep Amber	33	Light Blue	18
Golden Amber	34	Light Navy Blue	43
Deep Golden Amber	35	Bright Blue	41
		Medium Blue	32
Deep Salmon	8	Dark Blue	19
Orange	5	Primary Blue	20
Deep Orange	5A	Peacock Blue	15
		Blue Green	16
Pale Rose	54	Pale Green	38
Pale Gold	52	Pea Green	21
Gold Tint	51	Moss Green	22
Pale Salmon	53	Light Green	23
Light Salmon	9	Dark Green	24
Light Rose	7	Primary Green	39
Middle Rose	10		
Dark Pink	11	Clear	30
		Light Frost	31
Bright Rose	48	Heavy Frost	29
Primary Red	6		
Magenta	13	Chocolate Tint	55
Deep Rose	12	Pale Chocolate	56
Ruby	14	Pale Gray	60
Pale Lavender	36		

If spectrum curves are needed, send for bulletin No. 58-R.

Coloring Solution

For coloring incandescent lamps. Easily applied by dipping. Colors will not crack, peel or chip off.

Weatherproof coloring: For use outdoors. Colors: yellow, amber, red, blue, green and white opal. Requires three days to dry properly. Supplied in pints and quarts.

"Signaloid" coloring: For use indoors. Colors: yellow, amber, red, pink, purple, blue, green, moonlight blue and frostine. One quart will color five hundred 40 watt lamps. Supplied in pints and quarts.

No. 1945, Colorine Remover: Removes old dipped color coating. Non-inflammable. One carton makes 2½ gallons of solution. Supplied in one pound cartons.

Baked-on Lamp Coloring—Sprayed and baked on permanent colors, furnished to specifications. Prices on application.

Glass Roundels

Convex, uniformly colored, heat resisting glass roundels. Colors and sizes are uniform and standardized. When ordering, specify catalog number and desired color.

NUMBER	DIAMETER	AVAILABLE COLORS
1974	3¾"	RED, BLUE, GREEN, AMBER, CANARY, SURPRISE PINK* and CLEAR: Diffusing or Non-diffusing at same price * 50% extra in price
1975	4"	
1976	5⅝"	
1978	7⅞"	
1980	11¼"	

Gelatines

Strong, uniformly colored sheets, stocked in a wide range of plain and fancy combinations of color. For spotlights or floodlights. Standard sheets are 20" x 24".

NO.	DESCRIPTION	NO.	DESCRIPTION
G-0	Clear	G-28	Light Violet
G-1	Frosted (see also G-80)	G-29	Very Light Blue
G-2	Straw	G-30	Light Blue
G-3	Light Lemon	G-31	Medium Blue
G-6	Medium Lemon	G-32	Medium Dark Blue
G-9	Dark Lemon	G-35	Dark Blue
G-10	Light Amber	G-36	Green Blue
G-12	Medium Amber	G-37	Light Green
G-13	Dark Amber	G-38	Medium Green
G-14	Orange	G-39	Dark Green
G-15	Light Red	G-41	Very Dark Green
G-16	Medium Red	G-42	Moonlight Blue (blue-green)
G-17	Dark Red	G-43	Light Sky Blue
G-18	Chocolate	G-44	Surprise Pink
G-19	Rose Pink	G-69	Surprise Purple
G-20	Dubarry Pink	G-77	Surprise Violet
G-21	Magenta	G-45	Rainbow Color Combination
G-22	Rose Purple	G-55	Spotted Fancy Color Combination
G-23	Dark Purple	G-80	Frosted only, size 24"x24"
G-27	Dark Violet		

No. 49—Carrying Case for Cinemoid & Gelatine

Used to store an extra supply of gelatines, and to protect the mediums from damage when being transported. Sturdily constructed of light weight galvanized sheet steel. Dimensions 21½" x 24½" x 1".

Natural Colored Glass for Color Frames Etc.

Uniformly colored, heat resisting glass for color frame use can be furnished cut and stripped to size. A wide variety of colors are available. Details and prices on application.

KLIEGL ALZAK REFLECTORS and HOLDERS

Spherical concave reflectors fully utilize the light source and increase the intensity of the light beam when placed in back of the lamp in a Kliegl incandescent spotlight. These reflectors are of polished Alzak Aluminum which will not tarnish, peel or discolor under the heat of the lamp.

Reflector Holders, with an adjustable mounting bracket for mounting in spotlight units, are furnished as listed.



NO. 945



NO. 945-F

CAT. NO.	DESCRIPTION	SIZE DIAM.
Alzak Reflectors		
940	spherical polished	2 1/4"
941	spherical polished	2 11/16"
945	spherical polished	5 1/4"
947-B	spherical polished	7 1/4"
944	spherical polished	9"
946	spherical polished	8"
Reflector Holders		
941-F	for No. 941 reflectors	
945-F	for No. 945 reflectors	
947-BF	for No. 947-B reflectors	

SOLDERLESS LUGS

Solderless lugs are designed for use where wiring terminals are exposed to excessive heat. They are of stamped copper and are easily attached to any flexible or solid wire of its rated range. Bared wire end is inserted through hole in center strip and bent back between the wings of the lug, which are then clamped tight around the wire and insulation. In the event a large number of lugs are to be used, we recommend our special pliers for speed and efficiency, otherwise regular pliers or a hammer will insure a good connection.



NO. 450




FIG. 2



FIG. 1




FIG. 3

CATALOG NUMBER	FOR CABLE SIZE NUMBER	RATING AMPERES
450	10 and 12	25
460	6 and 8	50
461	4	100
459	2	150



NO. 471

Special pliers: No. 470 for No. 450 lugs, No. 471 for No. 460 and 461 lugs.

INCANDESCENT LAMPS

Various lamps have been recommended for use in specific lighting units. All of these lamps, in addition to virtually all styles of incandescent lamps for lighting devices, or general lighting are carried in stock in very large quantities. They are sold at regular lamp schedule prices. Complete lamp list and prices available on application.

ARC CARBONS

Standard carbons of best domestic grades are available for arc lamps.

Furnished in sets or individual types, for DC or AC, for use in high or low intensity arc lights.

60-75 AMP. CARBONS FOR SPOTLIGHT NOS. 11 & 18


TYPE	SIZE	NO. PER PKG.	NO. PER CASE	CASE WGHT.
DC	7/8" x 12"-U 3/8" x 6"-L	50	250	100 lbs. 14 "
DC	3/4" x 12"-U 1 1/2" x 6"-L	50	250	70 " 11 "

U-UPPER, L-LOWER

KLIEGL LENSES

Condensing Lens

Plano-convex clear crystal glass-exceptionally high quality. For use in conventional Plano-convex spotlights.

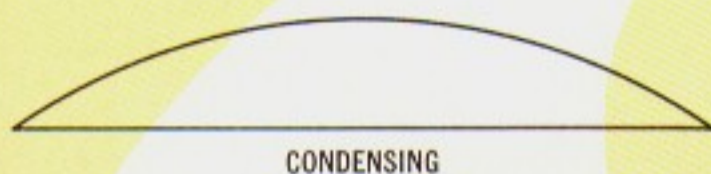


CAT. NO.	DIAMETER	FOCUS	CAT. NO.	DIAMETER	FOCUS
890	4½"	6½"	907	6"	15"
891	4½"	7½"	909	8"	8"
892	4½"	9"	910	8"	9"
896	5"	5½"	911	8"	10"
897	5"	7½"	912	8"	12"
898	5"	9"	913	8"	13"
899	5"	12"	914	8"	15"
901	6"	7"	915	8"	18"
902	6"	8"	916	8"	20"
903	6"	9"	917-12	10"	12"
904	6"	10"	917-18	10"	18"
905	6"	12"	917-26	10"	26"
906	6"	13"	918-30	12"	30"

Heat-resisting glass condensing lenses, prices on application.

Step and Fresnel Lenses


Kliegl step and Fresnel lenses are manufactured in our own molds from the finest heat resisting glass. These lenses were designed by Kliegl engineers and conform to the highest specifications. — Lenses have baked on black ceramic risers which eliminate all stray light. Step lenses are used in Klieglights, Fresnel lenses in Fresnel lens spotlights.

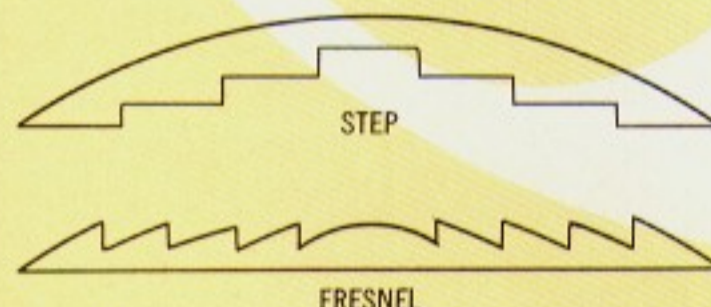


STEP LENS		FRESNEL LENS	
CATALOG NO.	DIAMETER	CATALOG NO.	DIAMETER
2070-B	5"	2061-B	3"
2071-B	6"	2062-B	6"
2071W-B†	6"	2063-B	8"
2072-B	8"	2064-B	12"
2073-B	12"	2065-B	13¾"
2074-B	14¾"	2066-B	16"
		2067-B	20"
		2362-B*	6"
		2363-B*	8"

* OVAL BEAM
† WIDE ANGLE

COLOR WHEELS

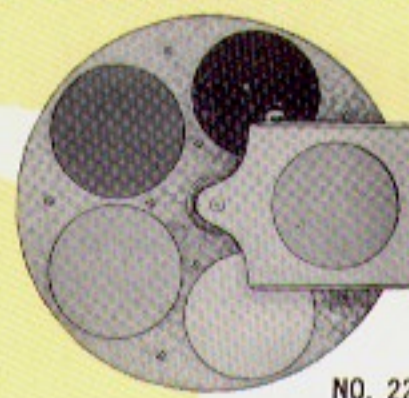

NO. 22

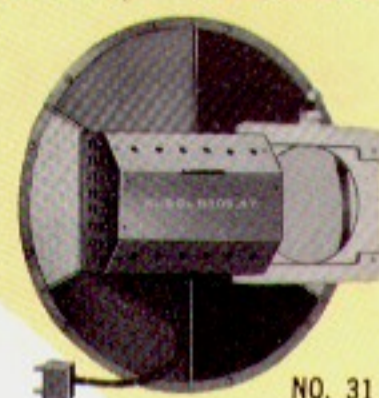

NO. 31

Cat. No.	Dia. of Wheel	No. of Colors	For Lens Size	Application
HAND OPERATED				
14	13½"	5	4½"	53, 5310
15	13½"	5	4½"	1163
16	18"	5	6"	43N6, 1365, 1164, 1167
22	18"	5	6"	11, 6N19, 70, 71
24	21¼"	7	6"	11, 6N19, 70, 71
23	24"	5	8"	18, 8N20, 8N24, 43N8, 1168, 1366, 1373, 1374, 1375
17	36"	5	12"	1174, 1178, 43N12
A.C. MOTOR OPERATED				
14AC	15¾"	6	4½"	53, 5310
14ACL*	15¾"	6	4½"	53, 5310
15AC	18"	5	6"	1163
15ACL*	18"	5	6"	1163
16AC	20"	6	6"	43N6, 1365, 1164, 1167
31AC	20"	6	6"	11, 6N19, 70, 71
31ACL*	20"	6	6"	11, 6N19, 70, 71
35AC	24"	5	8"	18, 8N20, 8N24, 43N8, 1168, 1366, 1373, 1374, 1375
35ACL*	24"	5	8"	18, 8N20, 8N24, 43N8, 1168, 1366, 1373, 1374, 1375
17AC	36"	5	12"	1174, 1178, 43N12
17ACL*	36"	5	12"	1174, 1178, 43N12

* Furnished with glass color inserts; all others listed are for use with Cinemoid or gelatine color mediums.

Prices for universal motor operation on application.

COLOR BOXES



NO. 26

Cat. No.	Size of Box	No. of Frames	For Use Unit No.	Lens Size	Frames Cat. No. & Size
26	17" x 10" x 5"	5†	*	6"	566; 8" x 9"
26A	24" x 12" x 5"	6†	18-8N20-8N24	8"	570; 10" x 11"
26DD	30" x 15" x 4½"	5‡	1178	12"	1039; 14" x 14"

* No's 11, 70C, 71C, 6N19.

† Side lever controls.

‡ Rear lever controls on left side.

KLIEGL SHUTTERS • BARN DOORS

Cat. No.	DESCRIPTION	Cat. No.	DESCRIPTION
Framing Shutters		2-Way Barn Door	
33	Two blade cut-off, for effects, metal	1080	Barn Door for 43N6
33A	Variegated cut-off, for water ripple effects	1081	Barn Door for 43N8
33B	Irregular four blade cut-off; 9" x 8" for 5" spotlights	1082	Barn Door for 43N12
33C	Similar No. 33B; 11" x 10" for 8" spotlight	1083	Barn Door for 43N16
33D	Diamond 2-way cut-off, 12" x 8" for 5" spotlights	1084	Barn Door for 1122, 1143
33E	Similar 33D, 15" x 11", for 8" spotlight	1091	Barn Door for 1155
1088	Regular four blade cut-off for No. 1163	1092	Barn Door for 1158
1085	Cut-off slide, 1" dia. hole; for No. 1163	4-Way Barn Door	
1086	Cut-off slide, 2" dia. hole; for No. 1163	1080A	Barn Door for 43N6
1087	Cut-off slide, 3" dia. hole; for No. 1163	1081A	Barn Door for 43N8
Iris Shutters		1082A	Barn Door for 43N12
2256	4" opening, for 1168, weight 1 lb.	1083A	Barn Door for 43N16
257	5½" opening, for 6" spotlight, weight 1¾ lbs.	1084A	Barn Door for 1122, 1143
258	8" opening, for 8" spotlights; weight 5½ lbs.	1091A	Barn Door for 1155
2260	10" opening, for 10" spotlights, weight 7 lbs.	1092A	Barn Door for 1158
Iris Dissolver			
256	2¼" opening; for half size objectives, per pair		



NO. 33



NO. 33A



NO. 33B



NO. 33D




NO. 257




NO. 567




NO. 566



NO. 577



NO. 1036G



NO. 1080A



NO. 1078

COLOR FRAMES

Cat. No.	Frame Size	No. of Colors	For Units (Applications, etc.)	Cat. No.	Frame Size	No. of Colors	For Units (Applications, etc.)
1032	3½" x 3½"	1	43N3	1038	14¾" x 18"	1	547
1033	5½" x 5½"	1	1163	1078C†	15" x 15"	1	1122, 1143
574	5¼" x 6"	1	53-5310	1078B†	15¾" x 15¾"	1	1158
1036	6½" x 6½"	1	43N6, 1365, 2166, 2167	581	16" x 16"	1	537, 1376
566	8" x 9"	1	11-70-71-6N19-1165	1078	18" x 18"	1	1155
567	8" x 15"	2		585A	18" x 18"	1	43N16
568	8" x 21"	3		585	18" x 20"	1	1N, 2N, 1N3
570	10" x 11"	1	18, 43N8, 8N20, 8N24 1366, 1368, 1373, 1374, 1375	588*	18" x 20"	1	1N, 2N, 1N3
580	12" x 12"	1	533, 548, 548A	Metal Frames with Glass			
577	12½" x 12½"	1	540	1032G	3½" x 3½"	1	43N3
578	12¾" x 14"	1	541	1033G	5½" x 5½"	1	1163, 2164, 2165
1039	14" x 14"	1	43N12, 1178, 1174	1036G	6½" x 6½"	1	43N6, 1365, 2166, 2167
1037	14¼" x 15"	1	546	566G	8" x 9"	1	11, 70, 71, 6N19, 1165
				570G	10" x 11"	1	18, 43N8, 8N20, 8N24, 1366
				580G	12" x 12"	1	548, 548A

† These color frames can be had with a special quick change snap on feature in addition to special construction providing maximum air cooling so as to hold Cinemoid or gelatine for an indefinite period of time. Prices on application.

* Wooden Frame


Other sizes, of metal or wood, with or without color mediums available. Prices on application.

KLIEGL TELESCOPIC FLOOR STANDS

Platform and Roller Caster Bases



SWIVEL TYPE

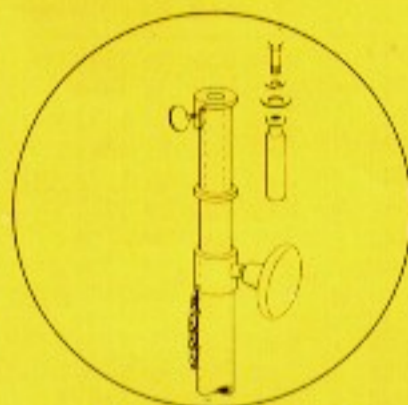

STUD TYPE




No. 1410



No. 1415



No. 1421



No. 1427

CAT. NO.	TYPE BASE	TYPE FITTING	APPROX. HGHT. † MIN. — MAX.	FOR UNITS IN GROUP
1402	11" ROUND	BOLT	28" — 48"	1
1410	18" SPOKE	SWIVEL	30" — 58"	2
1411	18" SPOKE	SWIVEL	48" — 88"	3
1415*	18" SPOKE	STUD	36" — 64"	4 & 5
1420*	19" R. C.	STUD	36" — 64"	4
1421*	25" R. C.	STUD	36" — 64"	5
1422*	30" R. C.	STUD	36" — 64"	6
1427	30" R. C.	STUD	24" — 40"	7

UNIT CLASSIFICATION

GROUP 1 — 43N3, 43N6, 53, 5310

GROUP 2 — 75N, 6N19, 8N20

GROUP 3 — 1N, 2N

GROUP 4 — 70, 71, 43N8, 1122, 1143, 1155, 1158, 1165, 1365

GROUP 5 — 43N12, 1174, 1175, 1366, 1368, 8N24

GROUP 6 — 43N16, 1373, 1374, 1375

GROUP 7 — 43N20, 1178, 1179, 1376, 1377

*For extra high adjustable stands (approx. 55" to 99") add suffix "XH" to appropriate catalog number.


†Measured from top of stand to floor.

KLIEGL LADDERS

Sturdily constructed of heavy channel steel with 1" supporting pipe cross bars (18" long). No. 1430 is 45" high and No. 1431 is 63" high. Ladders are painted dull black and are complete with proper pipe clamp.



No. 1431



No. 1430

No. 2436

LOAD END BOX


Load-end Box No. 2436 for use with Klieg ladders. Steel housing (10" x 4 3/4" x 2 1/2") with up to four 12" pigtails using either No. 955 or No. 955G connectors (2436G).

PORTABLE LIGHT TOWERS



Typical large tower with plugging facilities, roller casters, operation platform, etc. Illustrated unit was designed for the stage of Radio City Music Hall.

Cross lighting of the stage is often accomplished from light towers in the side wings. A selected grouping of spotlights and floodlights are mounted on a movable steel structure containing plugging facilities and operation platform. Designed to meet individual requirements, prices on application.

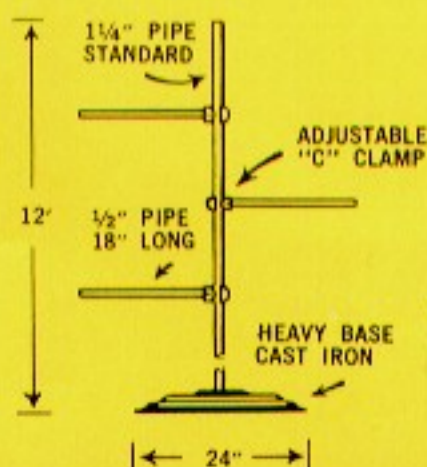

No. 1414A

Typical light boom for average stage use or travelling shows. Has a heavy cast iron floor base, 1 1/4" upright pipe (12 feet long) and six pipe clamp side arms for support of spotlights, floodlights, etc.

KLIEGL PIPE CLAMPS

Facilitate mounting of spotlights, openbox lights etc. on pipes in any position or angle. Quickly and easily attached, firm secure grip. Made in "C" clamp and bridge clamp styles.

"C" CLAMP TYPES



CAT. NO.	DESCRIPTION
FLAT FLANGE BRIDGE TYPES	
874	Small size, for 1/2" pipe; cast brass, with flange drilled and tapped for 1/4"-20 threaded screw. Weight 1 lb.
877	Medium size, for 1/2" to 1" pipe; malleable iron, with flange drilled and tapped for 1/4"-20 threaded screw. Weight 1 1/2 lbs.
877A	Same as No. 877, except drilled and tapped for 3/8"-16 threaded screw.
880	Large size, for 2" pipe—malleable iron, with flange drilled and tapped for 1/2"-13 threaded screw. Weight 4 1/4 lbs.
FLAT STEM BRIDGE TYPES	
876	Medium size, for 1/2" to 1" pipe; malleable iron, side tapped stem with thumb screw. Weight 1 1/2 lbs.
THREADED STEM BRIDGE TYPES	
875	Medium size, for 1/2" to 1" pipe; malleable iron, threaded stem for 1/2" pipe coupling. Weight 1 1/2 lbs.
FLAT FLANGE HOOK TYPES—"C" CLAMP	
1852	Medium size, for 3/8" to 1" pipe; malleable iron, with flat flange drilled and tapped for 1/4"-20 threaded screw.
1852A	Same as No. 1852 except drilled and tapped for 3/8"-16 threaded screw.
1850	Large size, for 1" to 2" pipe; malleable iron with flat flange, drilled and tapped for 1/2"-13 threaded screw.
1850A	Same as No. 1850 except flange drilled and tapped for 1/2" pipe connection.
1850B	Same as No. 1850 except flange drilled and tapped for 3/8"-16 threaded screw.
1850C	Same as No. 1850 except flange drilled and tapped for 1/4"-20 threaded screw.

All "C" clamps, if desired, can be furnished with a one inch spacer at no additional cost.

BRIDGE TYPES



No. 875



No. 877


TABLE BASES



No. 1440

CAT. NO.	DIA.	DESIGNED FOR USE WITH UNIT NUMBER
1437	4"	43N3
1438	5 7/8"	43N6, 53, 5310
1439	9"	43N8, 43N12, 70, 71, 533, 1122, 1143, 1155, 1158, 1163, 1164, 1165, 1167, 1365, 1366, 1368
1440	18"	43N16, 1373, 1374, 1375 All BAC/2 and BAC/4 color units

WALL BRACKETS

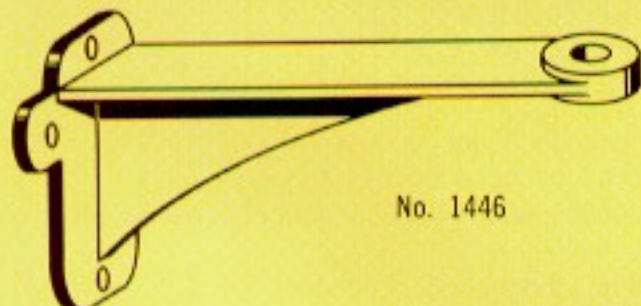

No. 1446

CAT. NO.	SIZE	DESIGNED FOR USE WITH UNIT NUMBER
1443	3 1/8"x2 1/8"	43N3
1444	7"x3 1/8"	43N6, 53, 533, 5310
1445	9"x4 7/8"	70, 1122, 1143
1446	10 1/2"x4 7/8"	43N8, 71, 1155, 1158, 1163, 1165, 1365
1447	13"x13"	43N12, 43N16, 1164, 1167, 1366, 1368 All 1365 BAC/2 and 4, and all 1368 BAC/2 and 4 units

Cable Supports



No. 636



No. 635

Cradle support with grooved cable rest, clamps, tie rope or hoist cable hole. Used to take up feeder cable slack and prevent drooping when borderlights are in raised position. Cable clamp, attached to pipe batten at feeder end of borderlights, holds cable and prevents connection pull when borderlight is raised and lowered.

No.	DESCRIPTION
CRADLE SUPPORTS	
636	For cable 3/8" to 1 3/4" diameter—Wght. 5 lbs.
6362	For cable 1 1/2" to 2 1/2" diameter—Wght. 9 1/4 lbs.
CABLE CLAMPS	
635	For 1 1/4" pipe — Wght. 5 1/2 lbs.
6352	For 2" pipe—Wght. 8 1/4 lbs.

Pipe Clamp Side Arm




No. 1860

Used for side arms from which to hang lights in tormentor or boomerang position or for hanging spotlights from borderlight pipe above borders. Also useful for pipe stiffeners to prevent sway or tipping on pipe battens.

CAT. NO.	PIPE LENGTH	PIPE DIA.
1860	12"	1/2"
1860A	18"	1/2"
1860B	12"	1"
1860C	18"	1"

KLIEGL PORTABLE WORK LIGHTS

Kliegl portable work lights are indispensable where temporary lighting is required; cleaning theatre auditoriums, repairs in garages and shops, inspection work, emergency lights, etc. Available in various type floor stands. Cable passes through stand and out from under the base so that it is not easily overturned if cable is dragged. They are provided with a hook for hanging coiled cable when work light is not in use. Exposed parts are finished in black enamel.

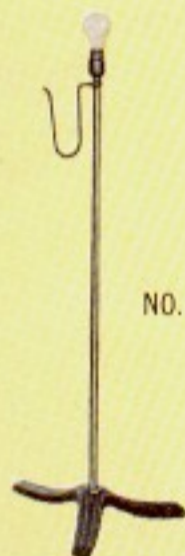


NO. 655



NO. 654



NO. 646

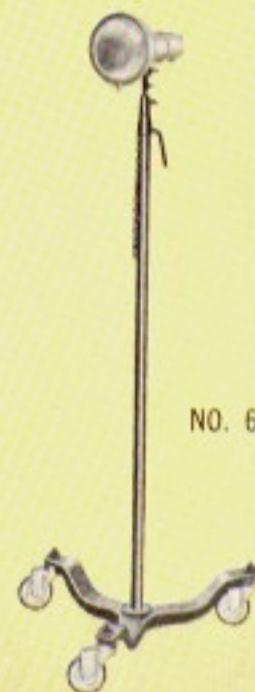

NO. 647

No. 655 — One-light stand; 3 feet fixed height, medium screw base receptacle for any size lamp from 100 to 300 watts. Cast iron tripod base. Weight 7½ lbs.

No. 654 — One-light stand; 5 feet fixed height, outlet box with medium screw base receptacle and wire lamp guard for 200 watt lamp. Cast iron tripod base. Weight 12 lbs. No. 653; Similar to 654 but with a mogul screw base receptacle for 500 watt lamp. Weight 14 lbs.

No. 646 — One-light stand; telescopic pedestal, height adjustable from 5' 6" to 8' 6". Open front spun aluminum reflector fitted with mogul screw base receptacle for 500 watt lamp, suitably enclosed in sheet metal housing and adjustably mounted on pedestal. Stabilized cast iron base with 4" rubber-tired roller casters. Weight 36 lbs.

No. 647 — One light stand. Similar to No. 646 except equipped with spun aluminum reflector, receptacle for 150 watt lamp, and a diffusing glass roundel in hinged ring holder in front. Weight 34 lbs.

Cable extensions and attachment plugs furnished to individual specifications at additional cost. No. 18-2 conductor type SJ rubber covered flexible cord is recommended.

ENCLOSED SWITCHES

Main Switches

are double-pole single-throw unfused knife-blade type. Suitably enclosed with special clamp for fastening to a pipe standard. Switch mounted on slate base—switch box has a hinged slotted cover, made of select steel finished in black enamel. Safe to use, easy to wire.



NO. 525

CAT. NO.	RATING	CLAMP SIZE
525	30 AMP, 125 VOLTS	FOR 1" PIPE
526	60 AMP, 125 VOLTS	FOR 1" PIPE
527	100 AMP, 125 VOLTS	FOR 1" PIPE


Booster Switches

are used with high-amperage arc spotlights. Permits starting or operating at lower than normal running current values. Consists of a main switch and one or more separately operated single pole switches. Sheet steel enclosure with hinged front for access to terminals. Porcelain bushed holes for circuit wires. Mounting holes are provided for fastening to a flat surface.

CAT. NO.	RATING		SWITCHES	
	AMPS	VOLTS	MAIN	BOOSTER
522	100	250	3 POLE	2 STEP
523	200	250	3 POLE	2 STEP

KLIEGL MUSICIANS' STANDS

Kliegl musicians' stands are well balanced and constructed. They are not easily upset and the units equipped with lights are correctly designed to provide proper and adequate illumination, eliminating eye strain, without light leaks so annoying to the audience. All music rests are amply proportional and sturdily mounted. All visible surfaces are attractively finished.

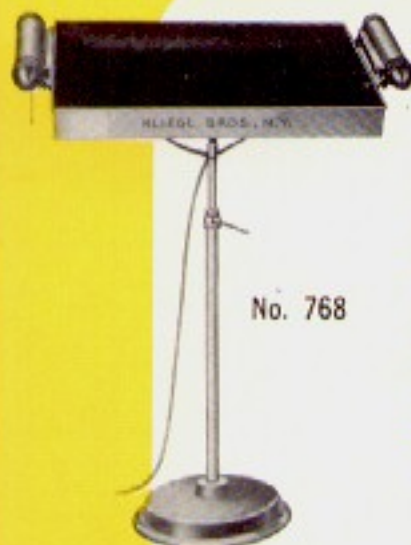

No. 768

ALL METAL LEADER'S STAND

A sturdy all metal stand having a music rest 28½" x 19", light guards on four sides, height and incline are adjustable, two light fixtures, one on each side of music rest, round cast-iron extra heavy base plate; telescopic iron pedestal; finished in gold, except inner surfaces of music rest which are dull black; completely wired; furnished with 12 feet of cable. Weight 38 lbs.

DEMOUNTABLE MUSIC STAND

Wooden, open frame type, music rest, 20" x 14¾", with hinged shelf at set angle, height adjustable. Cast-iron tripod base. Metal parts finished in black enamel. Open trough light fixture with deep curved metal reflector to direct all light downwards.

No. 744 same as No. 744WLF but without light fixture.



No. 744WLF



No. 766

ALL METAL MUSIC STAND


Music rest, 24" x 15", at set angle with light guards on all four sides. Light fixture has pull chain socket for one lamp. Base is tripod type of cast iron. Telescopic iron pedestal provides for music rest height adjustment. Finished in gold, except inside of music rest which is finished in dull black; completely wired with 8 feet of cable.

VIOL TYPE MUSIC STAND

Artfully designed music rest; 19¾" x 14½", made of aluminum, head piece holds light fixture fitted with twin-lamp pull chain socket. Light unit furnished with special diffusing glass to evenly illuminate music score. Adjustable, square, free-sliding height adjustment pedestal. Cast iron base with spun aluminum top cover. Finished in gold, base offset black. Wiring concealed. Furnished with 12 feet of cable. Weight 22½ lbs.



No. 821

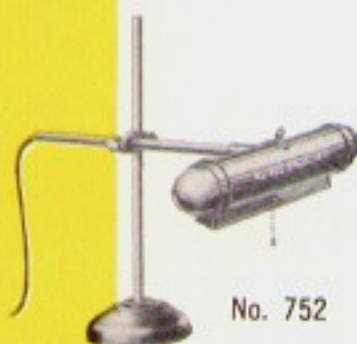

No. 752

PIANO AND ORGAN STAND

Stand lamp with pull-chain twin lamp socket. Reflector is a cylindrical brass casing with bell-shaped ends, removable for lamp replacement. Accommodates two 25 watt T-10 lamps. Heavy base insures stability. Reflector may be adjusted vertically, horizontally and angularly, allowing it to be set in any relative position to properly direct the light. Dull brass finish. Completely wired with 10 feet of cord. Upright height 17", projection arm extends 10", reflector length 12", weight 15 lbs.

LIGHTED BATON

For conducting orchestrations in darkened auditoriums, leaders find Kliegl lighted batons highly successful. The baton is made of light weight metal. It has a small electric light on the extreme end, which enables all movement to be very clearly seen in the dark by the musicians. Current is supplied by a dry battery. Furnished complete with lamp and battery.



No. 769

KLIEGL EFFECTS

For use with Spotlights, Sciopicons, Stereopticons, Open-box Floodlights, etc. for the reproduction of natural phenomena, as well as scenic and stage illusions by mechanical, electrical and optical means. Listed effects are standard; if individual requirements cannot be met with these, special effects are designed to specification or requirements.

Spotlight Effects — Various appliances for producing visual impressions, color effects and scenic illusions of different kinds.

NO.	DESCRIPTION	NO.	DESCRIPTION
257	Iris shutter for fading-out effect; 6" opening		Radium dance effect produced with the following:
240	Optiscope (Lobsterscope)	1180	Radium liquid visible only in ultra-violet light
238	Zig Zag lightning, for Sciopicon effect	1183	Ultra-violet filter; 6½" square heat resisting glass
239	Cloud lightning for sciopicon effect	1183A	Metal frame for ultra-violet filter
237	Lightning shutter	1185	Water shield for ultra-violet filter

Sciopicon Effects — Natural scenic illusions or fantastic images (moving clouds, flowing water, rising flames etc.) hand painted on mica discs, or on sectional glass discs all enclosed in metal casing with motor drive.

NO.	DESCRIPTION	NO.	DESCRIPTION
77	American flag waving; slide and waving disc with A.C. Motor	135	Moving fleecy clouds (*)
77A	American flag; slide, hand painted	138	Moving storm clouds (*)
78	Aurora Borealis, 4 slides and color wheel with A.C. Motor	150	Ocean Ripple, 3 mica painted slides
83	Blizzard effect; single disc and slide (*)	151	Ocean Waves (*)
90	Cyclone effect, single disc (*)	154	Panorama, moving country scene (*)
94	Dissolving colors, with attachment and slide carrier, 3 design slides and color wheel with clockwork	155AE	Panorama: moving, winter, desert, railroad, etc. (†)
98	Falling flowers, highly colored (*)	158	Rain effect (*)
100	Falling Roses, highly colored (*)	161	Rainbow effect; glass prisms
103	Fireworks, bursting explosions, falling colored stars (*)	164	Rising Fire and Smoke (†)
104	Flame effect (*)	168	River of souls (*)
105	Flowing Water (*)	175	Sand Storm (*)
106	Flying angels in groups (*)	176	Sand Storm (†)
107	Flying Birds (*)	179A	Scene slides, star slides, etc
108	Flying Butterflies (*)	181	Snow effect (*)
112	Flying Ghosts and Skeletons (*)	186	Swimming Fish (*)
117	Inferno spectacular (†)	188	Twinkling moon, comical, hand movement
122	Lightning, zigzag; 3 brass cut slides with lightning shutter	192	Volcano Eruption (*)
132	Moving clouds with rising or setting moon; 18" disc and slide (*)	195	Waterfall (*)
		196	Water Ripple, mica slide and Framing Shutter No. 33A

* 18 inch single disc with A.C. Motor

† 18 inch double disc with A.C. Motor

Effects can be furnished with Universal or D.C. Motor.

Electro-mechanical Effects include various lighted or motivated illusions or properties. Listed units are most frequently used, but special effects can be made to order.

NO.	DESCRIPTION	NO.	DESCRIPTION
233	Automatic lightning striker No. 232, with rheostat switch and 25 ft. stage cable	224	Mephisto Spark effect. Sparks produced between two metals without using current. Hand sparkle, shoe plate, dancing mats, etc., prices on application
209	Electric smoke boxes; single unit	225	Moon Box, 13" diameter, without cable
209A	Electric smoke powder for No. 209, 1 pound	1190	Smoke Pots; 1 minute, white smoke, per dozen
215	Flash or explosion boxes	1191	Smoke Pots; 1 minute, black smoke, per dozen
215A	Flash powder for No. 215, 2 oz.	2286	Twinkling stars, set of 24 with keyboard for stage
214	Fireflies, in sets of 24; with battery and keyboard	201	Torch, flaming; with lamp and battery
230	Hand lightning, without rheostat	229	Torch, Lycopodium

Crystal Showers — Rotating mirrored devices, suspended from the ceiling, to reflect light that has been directed towards them from outside sources, such as Kliegl Spotlight No. 5310. An exceptionally pleasing effect is created when light sources are equipped with a motor driven color wheel, such as Kliegl No. 14A.C. Sparkling and moving spots of light are reflected to all parts of a room. Excellent for ballrooms, banquet halls and other places of public entertainment.



NO. 244B

NO.	DESCRIPTION	NO.	DESCRIPTION
244A	18" Diameter, 10" high; weight 13½ pounds	244C	30" Diameter, 16" high; weight 36 pounds
244B	24" Diameter, 13½" high; weight 24 pounds	244D	40" Diameter, 24" high; weight 56 pounds

KLIEGL OBJECTIVE LENS

Supplementary lens system used with Sciopticons, Stereopticons etc. for projection of slides, scenic and fantastic effects. Completely assembled with brass tube, adjustable lens and proper holder to fit effect or slide carrier. Short range objective lenses are generally used when the projector is located on the stage. Half size objective lenses are for medium to long range throws.

SHORT RANGE OBJECTIVE LENSES

No.	Focus	Size of Projection on Screen at distance of	
		15 Ft.	50 Ft.
280	12"	6-10 ft.	24-34 ft.
281	10"	8-12 ft.	32-42 ft.
282	8"	14-18 ft.	38-54 ft.
283	6"	20-34 ft.	
284	4"	40-60 ft.	
285*		12-16 ft.	
286*		20-23 ft.	

*Special short-focus lens.

NO. 283



LONG RANGE HALF SIZE OBJECTIVE LENSES

No.	Focus Inches	Distance from Screen, in Feet													
		20	30	40	50	60	70	80	90	100	110	120	130	140	150
		Size of Projection on Screen, in Feet													
267	8	8	12	16	20	24									
268	10	6	9	12	15	18	21	24							
269	12		7	10	13	16	19	22	23	25					
270	15		6	8	10	12	14	16	18	20	22	24			
271	18				8	10	11½	13	15	17	19	21	22½	24	26
272	20				7½	9	10½	12	13½	15	16½	18	19½	21	22½
273	24				6	7½	8¾	10	11	12½	14	15	16	17½	19
274	30				5	6	7	8	9	10	11	12	13	14	15
275	36						6	6½	7	8	9	10	10½	11	12

NO. 268



ACHROMATIC LENS


No. 285A — Color and distortion corrected lens with an approximate one foot beam spread for every foot of throw. For use with 4" x 3¼" and 4" x 5" slides.

EFFECT HOLDERS

No.	DESCRIPTION
838A	With 6" Diameter Lens—Wgt. 4 Lbs.
838B	With 8" Diameter Lens—Wgt. 7½ Lbs.

Auxiliary attachment for use in effect projection. Furnished with condensing lens. Fits slide grooves on spotlights and Sciopticons. Retained in position by a set screw. Holder is cast aluminum construction.

NO. 838A




SLIDE CARRIERS and ADAPTORS

No.	DESCRIPTION
264	Slide Carrier of Metal for Slides 3¼"x4"
262	Slide Carrier of Metal for Slides 4"x5"
839	Adapter with Slide Carrier No. 264
839A	Adapter with Slide Carrier No. 262

Auxiliary equipment for effect projectors facilitating the use of regular lantern slides or replacement equipment for slide projectors. Slide carriers hold two slides and permit quick change of scenes. Adaptors for slide carriers permit ordinary lantern slides to be used with Sciopticons. Consist of a cast aluminum frame that fits grooves in front of effect holder. Holds slide carrier and is provided with grooves in front to hold objective lenses.

NO. 839



KLIEGL SCENIC SLIDE PROJECTORS

Precise projection of either hand painted or photographically processed slides. Gives clear sharp detail with no loss of color value. Units have an aluminum and sheet steel housing with hinged top for easy relamping. Excellent ventilation coupled with quiet forced air blower system assures proper lamp life.

FEATURES:

- Sturdy light weight construction.
- Light tight construction.
- Properly ventilated- quiet blower system.
- Easy relamping & interior inspection.
- Triple condenser lens system.
- Highest quality materials & workmanship.



NO. 1674

Achromatic Lens Units

Units are equipped with recommended achromatic, color and distortion corrected lens having an approximate one foot beam spread for every one foot of throw.

No. 1674-A — Achromatic lens unit. 2100 watt, 65 volt T24 mogul bipost lamp; equipped with transformer for use on 110 volt A.C., telescopic roller caster stand, 25 feet of cable, pin plug connectors.

No. 1676-A — Achromatic lens unit. 5000 watt, 110 volt G-64 biplane filament bipost base lamp. Equipped with No. 1422 telescopic roller caster stand, 25 feet of cable, pin plug connectors.

Standard Objective Lens Units

Units are furnished with one focal length lens, (No.'s 280 through 284 found on page 66). Units will also accommodate half size objective lenses No.'s 267 through 275 found on page 66. Half size objective lenses are optional at slight additional cost.

No. 1674 — Same as No. 1674A but with standard objective lens.

No. 1676 — Same as No. 1676A but with standard objective lens.

HEAT RESISTING GLASS FOR SLIDES	CAT. NO.	DESCRIPTION
	1683	3 1/4" X 4" — FOR NO. 1674 and NO. 1674A PROJECTORS
	1684	4" X 5" — FOR NO. 1676 and NO. 1676A PROJECTORS

Automatic Slide Changers

Sturdy light weight, aluminum and sheet steel construction. Equipped with inbuilt positioner switch, to assure proper alignment of slides, A.C. Motor, 3 way wiring and pin-plug connectors. Holds a total of seven slides.

No. 1677 — For use with No. 1674A and No. 1674 projectors. Holds seven 3 1/4" x 4" slides.

No. 1678 — For use with No. 1676A and No. 1676 projectors. Holds seven 4" x 5" slides.



NO. 1677

KLIEGL LINNEBACH TYPE SCENIC PROJECTORS



Designed for the projection of scenery on rear curtains or similar large flat areas. Desired scene is painted, or otherwise applied, on a glass slide and is then projected on a curtain or back drop without the use of lenses. Based on the shadow box principle and using a single concentrated light source all colors and designs are clearly projected—outlines are slightly diffused producing a soft-toned appearance. All units wired and furnished with 25 feet of stage cable.

No. 2048 — projects a scene 15 feet wide from a 15 foot throw. Takes 24" x 24" glass slide and uses a 1000 watt T20, C13D biplane filament mogul prefocus base lamp.

No. 248 — projects a scene 30 feet wide from a 10 foot throw. Takes a 28" x 40" glass slide and uses a 2100 watt 65 volt mogul bipost lamp. Unit equipped with a transformer for use on 110 volt A.C. and 25 feet of stage cable.

FRAMED SLIDES


No. 2049 — 24½" x 24½" wooden frame with glass slide for unit No. 2048.

No. 249 — 28½" x 40½" wooden frame with glass slide for unit No. 248.

SCIOPTICONS Scenic Effect Projectors

Principally used for the production of animated scenic illusions, such as rippling water, moving clouds, rising flames etc., upon a backdrop from rear of stage, side wings or balcony. Unit is designed for use with Kliegl Sciopticon Effects, found on page 67, or is adaptable for slide projection using No. 839 adaptor with slide carrier, as found on page 66.

No. 75N consists of a standard 6N19 Plano-Convex spotlight (which may be used as a regular follow spot when not being used for effects or slides) equipped with a second condensing lens (Dutchman No. 838A) and one objective lens (No. 280-284), heavy base telescopic floor stand, pin-plug connector and 25' of stage cable. Effects or No. 839 Slide Carrier and Adaptor are not included in the base price and must be independently ordered.

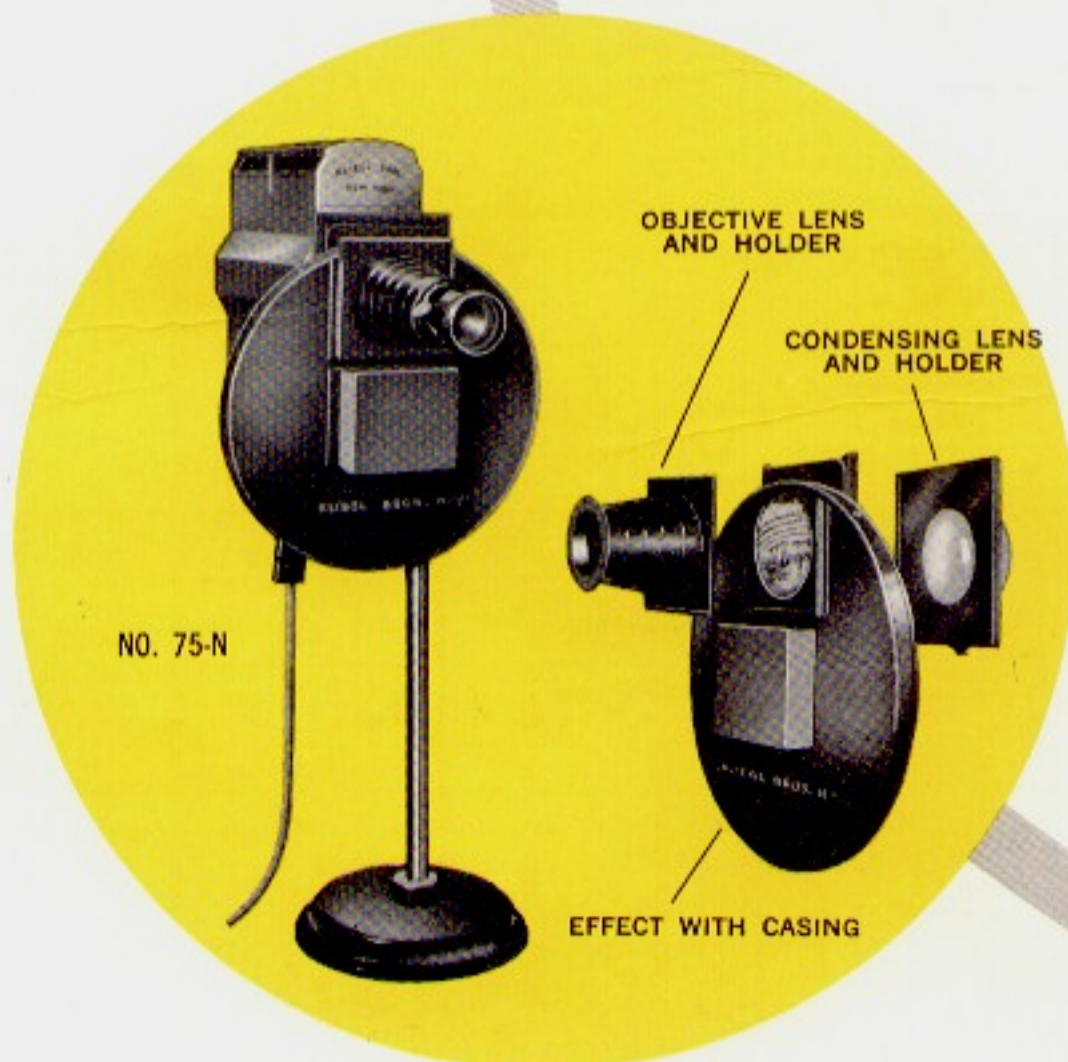

KLIEGL HEAVY-DUTY PLUGS



NO. 301 1/2



NO. 301



NO. 302



NO. 315



NO. 2301



NO. 1301



NO. 4301



NO. 389



NO. 3301

Heavy duty plugs are made in various designs for current capacities ranging from 30 to 400 amperes. They are regularly furnished with Kliegl floor pockets, wall pockets, plugging boxes and similar wiring devices, but extra plugs or replacements are occasionally required.

Standard plugs in different arrangements, with flat-blade contactors on a solid fibre insulating body. Cable extends through handle, well into the body of the plug and is held by a ridged metal clamp which grips the cable firmly and eliminates strain on terminal connections. Contact strips are of heavy-gauge copper, one fixed in position, the other floating and backed with a spiral spring to insure perfect sliding contact at all times.

CATALOG NO.	AMP	WIRE	VOLTS	TYPE
301 1/2 *	30	2	250	R
301 *	50	2	250	NR
302 *	30	2	250	NR
315 *	30	2 & GD.	250	NR
389	100	2	250	R
1301	100	2	250	R
4301	200	2	125	R
328	400	2	250	R
2301	30	3	125/250	NR
2302	50	3	125/250	NR
3301	100	3	125/250	NR
323	200	3	125/250	NR
325	400	3	125/250	NR

* U/L APPROVED, TYPE: R—REVERSIBLE, NR—NON-REVERSIBLE

PLUG RECEPTACLES




NO. P-445



NO. P-447



NO. P-448



NO. P-93



NO. P-95



NO. P-96



NO. P-97A



NO. P-97

CATALOG NO.	AMP	VOLTS	NO. OF CIRCUITS
P-447	30	250	2-2 Wire
P-448	30	250	2-2 Wire
P-445	30	250	1-2 Wire & GD.
P-449	50	250	1-2 Wire
P-95	50	250	1-2 Wire
P-95A	50	250	1-2 Wire
P-95C	100	—	1 Wire
P-96	50	250	1-2 Wire
P-97	100	250	1-2 Wire
P-97A	30	125/250	1-3 Wire
P-97C	200	—	1 Wire
P-93	200	125	1-2 Wire
P-93C	400	—	1 Wire

Used primarily as a structural part of Kliegl stage pockets, wall pockets, plugging boxes, portable dimmer boxes and the like. These plug receptacles are supplied separately for purposes of repair and replacement of equipment in service. Each receptacle is furnished as a complete unit, ready for installation. Consists of a one-piece porcelain mounting block with copper contact parts and wiring lugs attached.

KLIEGL PANEL POCKETS

Panel pockets consist of several heavy duty Kliegl plug receptacles wired to a branch cutout or service panel housed in a suitable metal enclosure. These plug receptacles, individually fused, provide convenient service outlets for connecting spotlights, sciopticons, stereopticons, portable motor driven tools and other lighting equipment or electrical apparatus requiring considerable current.

Used primarily in theatre balconies, on borderlight bridges, in projection booths, photographic studios, machine shops, etc.

Fitted with two, four or more Kliegl plug receptacles and a fused distribution panel enclosed in a steel cabinet having a hinged door with a snap lock. Main bus bars are arranged for either two or three wire service feeders. The two wire branch outlets are individually fused with cartridge fuses. They are furnished fully wired, complete with fuses and plugs. Panel pockets with a greater number of outlets, or with polarized plugs, or other arrangements than those listed can be supplied to meet special requirements.



NO. 374

CATALOG NUMBER	NO. OF OUTLETS	AMP. PER OUTLET	VOLTS	PLUG NO.
2-WIRE MAIN: 2-WIRE OUTLETS				
371-2*	4	30	120	301½
375-2*	8	30	120	301½
3-WIRE MAIN: 2-WIRE OUTLETS				
371-3*	4	30	120	301½
375-3*	8	30	120	301½
372	2	50	250	301
374	4	50	250	301


* U/L APPROVED

POWER SERVICE OUTLETS

Portable extensions with extra heavy duty plugging facilities, for servicing large current consuming devices such as motor driven equipment, welding machines, etc., are manufactured to meet individual requirements. Designs for 3-phase 4-wire service with outlets up to 200 amps. capacity available. Prices on application.

PORTABLE DISTRIBUTION UNITS

Portable control units with plugging facilities and control switches are manufactured to meet individual job specifications. Units usually contain Steel Cabinet, main and selective switches, proper fusing, desired number of plug outlets of required sizes, portable roller caster stand and required feeder cable. Prices on application.

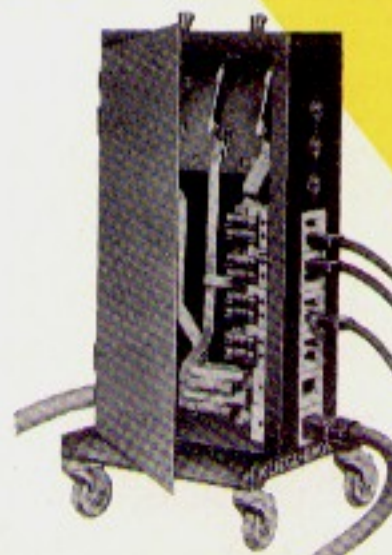

TYPICAL UNIT

KLIEGL STAGE FLOOR POCKETS

Stage floor pockets are set flush in the floor providing outlets for the connection of portable lamps and other electrical devices. They consist of a sturdy sheet iron box with a reinforced cast iron surface plate that has a molded safety tread. The cover has a hinged selfclosing, notched door (for cable passage) which will not accidentally open if stepped on. Outlets are properly set at an angle to prevent dirt from accumulating therein. All floor pockets are furnished with proper plugs.

Stage Floor Pockets — PLUG TYPE NOT GROUNDED



CATALOG NUMBER	PLUG OUTLETS	RATING AMP/OUTLET	VOLTS	PLUG NUMBER
2 WIRE OUTLETS: NO GROUND				
351*	1	50	250	301
352*	2	1-25 1-50	250 250	302 301
353*	3	25	250	302
354*	4	25	250	302
348*	2	30	250	301½
349*	4	30	250	301½
350*	6	30	250	301½
1350*	1	100	250	1301
4350	1	200	250	4301
3 WIRE OUTLETS: NO GROUND				
3350	1	100	110/220	3301
3352	1	150	110/220	323

GROUNDED

CATALOG NUMBER	PLUG OUTLETS	RATING AMP/OUTLET	VOLTS	PLUG NUMBER
355	1	30	250	315
356	2	30	250	315
357	3	30	250	315
358	4	30	250	315

DIMENSIONS AND WEIGHTS


CAT. NO.	348	349	350	351	352	353	354	355	356	357	358	1350	3352	4350
A	6¾"	9¼"	12"	6¾"	9¼"	12"	14½"	6¾"	9¼"	12"	14½"	6¾"	9¼"	9¼"
B	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"	11½"
C	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"	9¼"
D	5"	7¾"	10¾"	5"	7¾"	10¾"	13¾"	5"	7¾"	10¾"	13¾"	5"	7¾"	7¾"
E	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"	9¾"
WGHT. LBS.	19	31	38	17	27	32	38	17	22	32	38	22	38	36

Nos. 351/955, 351/955G, 352/955 and 352/955G — same dimensions as No. 351.

Nos. 353/955, 353/955G, 354/955 and 354/955G — same dimensions as No. 352.

* U/L approved.

Stage Floor Pockets — CONNECTOR TYPE NOT GROUNDED

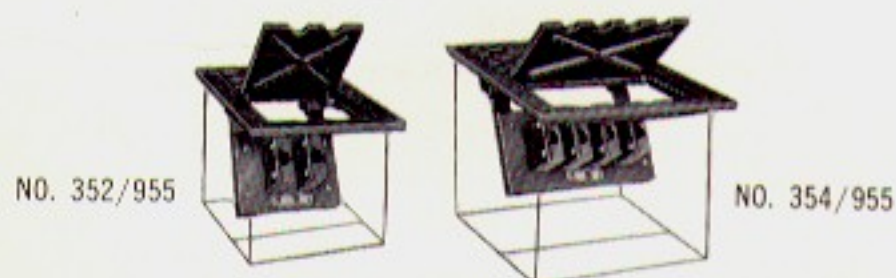


CATALOG NUMBER	PLUG OUTLETS	RATING AMP/OUTLET	VOLTS	CONNECTOR NUMBER
2 WIRE OUTLETS: NO GROUND				
351/955	1	20	250	955
352/955	2	20	250	955
353/955	3	20	250	955
354/955	4	20	250	955

GROUNDED

CATALOG NUMBER	PLUG OUTLETS	RATING AMP/OUTLET	VOLTS	CONNECTOR NUMBER
351/955G	1	20	125	955G
352/955G	2	20	125	955G
353/955G	3	20	125	955G
354/955G	4	20	125	955G

WATERPROOF FLOOR POCKETS




Waterproof floor pockets having a special cover which prevents water, dirt, sweepings, etc. from entering the receptacle are available in individual outlet ratings of from 30 to 100 amperes. Prices on application.

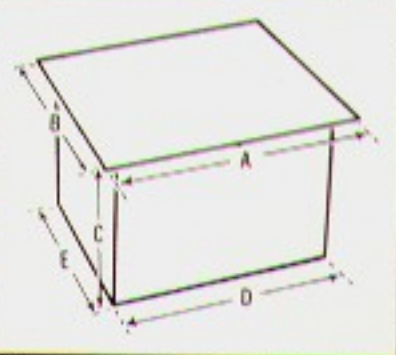

KLIEGL WALL POCKETS


Wall pockets provide plugging service outlets where temporary heavy circuit connections are required. Surface types are intended for mounting on the face of a wall. Flush types are intended for recessed installation. All pockets are furnished complete with proper plugs.

Surface Wall Pockets

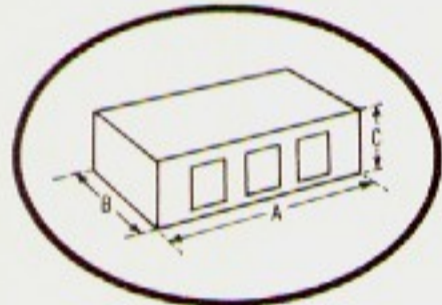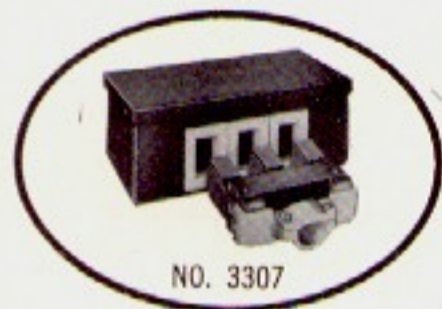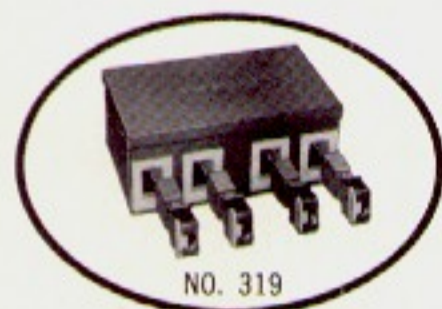

CATALOG NO.	OUTLETS	WIRE	AMPS	VOLTS	PLUG NO.	A	B	C	WGHT-LBS
2-WIRE OUTLETS: NO GROUND									
307	1	2	50	250	301	4 1/8"	6"	2 1/2"	2 1/2
317	2	2	50	250	301	11"	7 1/4"	5"	9 1/2
318	3	2	50	250	301	11"	7 1/4"	5"	10 1/2
319	4	2	50	250	301	11"	7 1/4"	5"	11
1307†*	1	2	100	250	1301	5"	6"	3 1/4"	4 1/2
4307†	1	2	200	125	4301	11"	7 1/4"	5"	11
327†	1	2	400	125	328	15"	11"	6"	20
3-WIRE OUTLETS: NO GROUND									
2307	1	3	30	125/250	2301	5"	6 1/4"	3 3/4"	4 1/2
2308	1	3	50	125/250	2302	11"	7 1/4"	5"	10
3307†*	1	3	100	125/250	3301	11"	7 1/4"	5"	10 1/2
322†	1	3	200	125/250	323	15"	11"	6"	20
324†	1	3	400	125/250	325	18"	12"	8"	26
2-WIRE OUTLETS: PLUS GROUND									
366	1	2G	30	250	315	5"	6"	3 3/4"	5
367	2	2G	30	250	315	11"	7 1/4"	5"	9 1/2
368	3	2G	30	250	315	11"	7 1/4"	5"	10 1/2
369	4	2G	30	250	315	11"	7 1/4"	5"	11
2307G	1	2G	60	250	2301G	5"	6 1/4"	3 3/4"	5
4307G†	1	2G	100	250	4301G	11"	7 1/4"	5"	12

Flush Wall Pockets

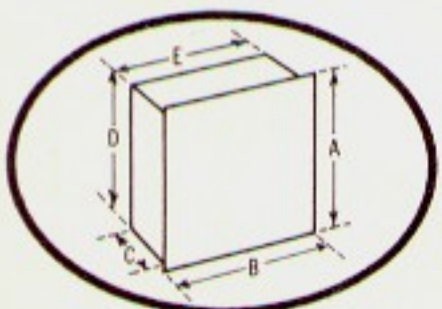

CATALOG NO.	OUTLETS	WIRE	AMPS	VOLTS	PLUG NO.	A	B	C	D	E	WGHT-LBS.
2-WIRE OUTLETS: NO GROUND											
308§§	1	2	50	250	301	7 1/2"	5"	3 3/4"	6 1/4"	4 1/2"	6 1/4
309§	1	2	50	250	301	7 1/2"	5"	3 3/4"	6 1/4"	4 1/2"	6 1/4
310*	1	2	50	250	301	7 1/2"	5"	3 3/4"	6 1/4"	4 1/2"	7 1/4
311*	2	2	50	250	301	7 1/2"	9"	4"	6 1/4"	7 3/4"	8 1/4
312	3	2	50	250	301	7 1/2"	10 1/2"	4 3/4"	6 1/4"	8 1/2"	9
313	4	2	50	250	301	7 1/2"	12 1/2"	4 1/2"	6 1/4"	11"	11
1310†*	1	2	100	250	1301	7 1/2"	6 3/4"	6 1/4"	6"	5 1/4"	10
4310†	1	2	200	250	4301	7 1/2"	9"	7"	6 1/2"	7 3/4"	12
3-WIRE OUTLETS: NO GROUND											
2310	1	3	30	125/250	2301	7 1/2"	6 3/4"	6 1/4"	6"	5 1/4"	10
2311	1	3	50	125/250	2302	7 1/2"	10 1/2"	4 3/4"	6 1/4"	8 1/2"	10
3310†	1	3	100	125/250	3301	7 1/2"	10 1/2"	6"	6"	8 1/2"	12
3311†	1	3	200	125/250	323	7 1/2"	12 1/2"	8"	6 1/4"	11"	24
2-WIRE OUTLETS: PLUS GROUND											
361	1	2G	30	250	315	7 1/2"	6"	3 3/4"	6 1/4"	4 1/2"	8
362	2	2G	30	250	315	7 1/2"	9"	4"	6 1/2"	7 3/4"	8 1/2
363	3	2G	30	250	315	7 1/2"	10 1/2"	4 3/4"	6 1/4"	8 1/2"	9 1/2
364	4	2G	30	250	315	7 1/2"	12 1/2"	4 1/2"	6 1/4"	11"	11 1/2
2310G	1	2G	60	250	2301G	7 1/2"	6 3/4"	6 1/4"	6"	5 1/4"	12
4310G†	1	2G	100	250	4301G	7 1/2"	9"	7"	6 1/2"	7 3/4"	14


* — U/L Approved §§ — Brass face plate with lock & key. § — Brass face plate without lock.
† — For use in series with switches and not for closing or opening circuits under load.

KLIEGL PLUGGING BOXES

Portable plugging boxes provide individually fused outlets for quickly and conveniently connecting several lighting units or electrical devices to a single feeder. Designed so as to be permanently attached to one end of a flexible feeder cable. Plugs or connectors, of the proper rating and type, are furnished with all boxes. Special cable clamp prevents strain on terminal connection when box is dragged over the floor. Designed for rough usage.

Plug Type - Cartridge Fuses*

NOT GROUNDED

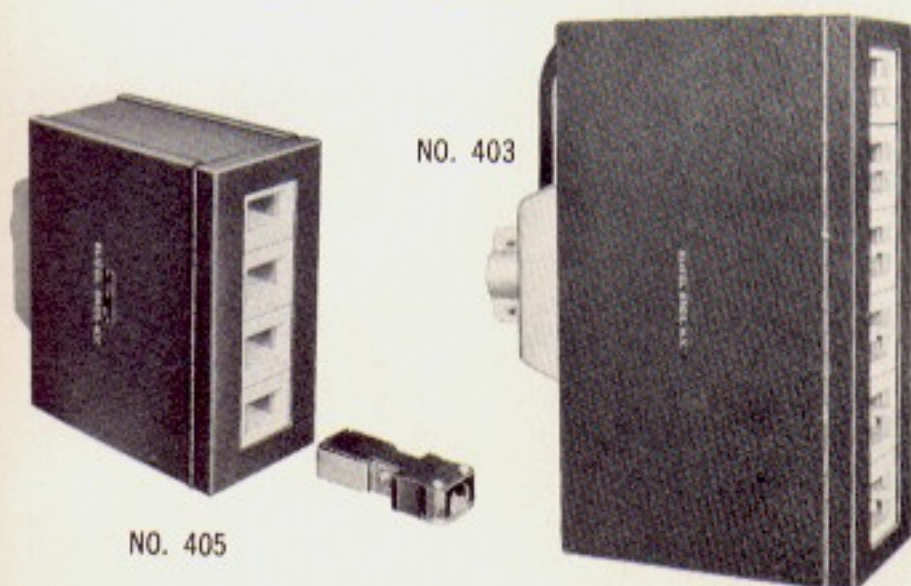


CATALOG NO.	OUTLETS	AMPS/OUTLET	VOLTS	PLUG NO.
2-WIRE MAIN: 2-WIRE OUTLETS				
346-2	6	30	250	301½
401	12	30	250	301½
404	4	60	250	301
406	6	60	250	301
3-WIRE MAIN: 2-WIRE OUTLETS				
346-3	6	30	250	301½
403	12	30	250	301½
405	4	60	250	301
407	6	60	250	301

GROUNDED

CATALOG NO.	OUTLETS	AMPS/OUTLET	VOLTS	PLUG NO.
2-WIRE PLUS GROUND MAIN: 2-WIRE PLUS GROUND OUTLETS				
474	4	30	250	315
476	6	30	250	315
3-WIRE PLUS GROUND MAIN: 2-WIRE PLUS GROUND OUTLETS				
475	4	30	250	315
477	6	30	250	315

*-U/L Approved

No. 477 showing interior cartridge fuses.

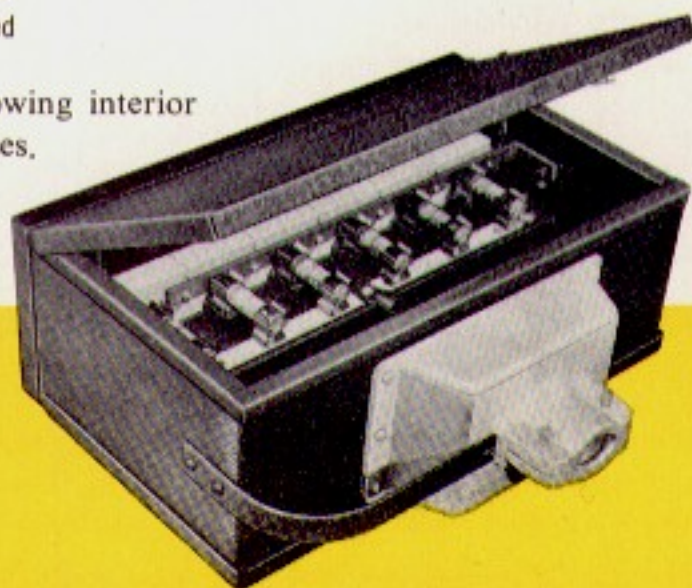

Connector Type - Circuit Breaker Protection

NOT GROUNDED



CATALOG NO.	OUTLETS	AMPS/OUTLET	VOLTS	CONNECTOR NO.
2-WIRE MAIN: 2-WIRE OUTLETS				
456	6	20	250	955
457	6	30	250	956
3-WIRE MAIN: 2-WIRE OUTLETS				
456-3	6	20	250	955
457-3	6	30	250	956

GROUNDED

CATALOG NO.	OUTLETS	AMPS/OUTLET	VOLTS	CONNECTOR NO.
2-WIRE PLUS GROUND MAIN: 2-WIRE PLUS GROUND OUTLETS				
456G2	6	20	125	955G
457G2	6	30	250	956G
3-WIRE PLUS GROUND MAIN: 2-WIRE PLUS GROUND OUTLETS				
456G3	6	20	125	955G
457G3	6	30	250	956G
4-WIRE PLUS GROUND MAIN: 2-WIRE PLUS GROUND OUTLETS				
456G4	6	20	125	955G
457G4	6	30	250	956G

KLIEGL CONNECTORS (CONT.)

Double Branch-Off

WITH TWO PLUGS


NO. 995



CATALOG NUMBER	OUTLETS	AMPS.	VOLTS	CABLE NUMBER		STYLE
				OUTLET	MAIN	
995*	2, 2-wire	5	250	14	12	R

Multiple Circuit

2 WIRE MAIN
3-2 WIRE OUTLETS

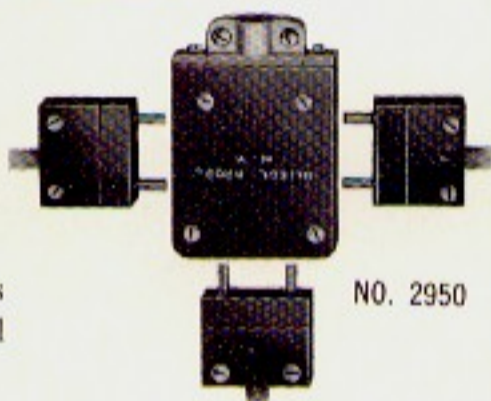

NO. 2950

Spring catch for connectors can be furnished at additional cost.

CATALOG NUMBER	AMPS.		VOLTS	CABLE NUMBER		STYLE†
	OUTLETS	MAIN		OUTLETS	MAIN	
2950*	5	15	250	14	12	R
2955*	15	45	250	14	8	R

Wall Outlets

Other arrangements, for two, three or four plugs, or for connector with three or more poles can be furnished to suit requirements. Prices on application.



NO. 999

CATALOG NO.	AMPERES	VOLTS	CABLE NO.	STYLE†
999	5	250	14	R
999-N	5	250	14	NR
1000	15	250	12	R
1000-N	15	250	12	NR
1001	30	125	10	R
1001-N	30	125	10	NR

Armored-Cable




NO. 977

CATALOG NO.	AMPERES	VOLTS	CABLE NO.	STYLE†
977	15	250	14BX	R

Chandelier Connectors

NON-AUTOMATIC TYPE

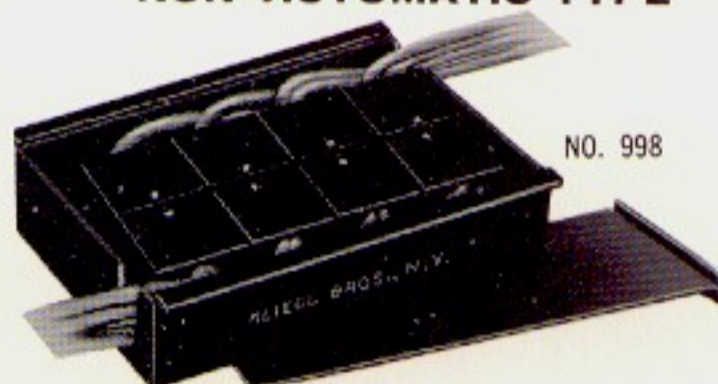


NO. 998

Consists of several KliegL No. 950 connectors assembled in a metal box, with passage for wires and sliding cover. Made for three or four circuits, but can be furnished for greater number of circuits if required.

CATALOG NO.	CIRCUITS	AMPS/CIRCUIT	VOLTS
997	3, 2-wire	5	125
998	4, 2-wire	5	125

AUTOMATIC TYPE

Consists of a ceiling mounted, fixed connector housing and a traveling plug connector. When the chandelier is dropped for relamping or cleaning, the traveling plug connector is withdrawn from the stationary housing and contact is automatically broken. When chandelier is raised, contact is automatically made when proper height is reached.

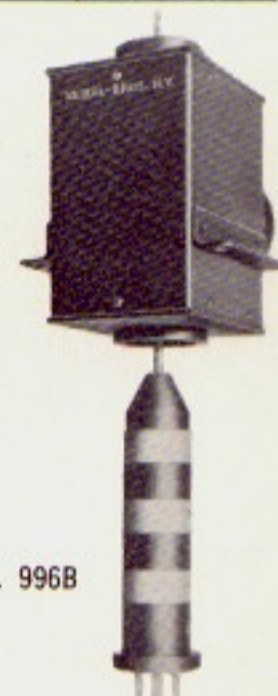

NO. 996B

CATALOG NO.	CIRCUITS	AMPS/CIRCUIT	VOLTS
996A	1, 2-wire	30	250
996B	1, 3-wire	30	250
996C	1, 4-wire	30	250

Battery-Charging



NO. 965

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE
965*	50	125	6 Duplex	NR

* U/L approved. Styles: R—reversible, NR—non-reversible.

† Reversible styles listed can be furnished polarized, non-reversible, fitted with fibre pin, at additional cost.

KLIEGL CONNECTORS (CONT.)


Three-Pole



NO. 3950

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE†
3950*	5	125-250	14	R
3955*	20	125-250	12	R
3956*	30	125-250	10	NR
3957*	60	125-250	4	NR
3958†	100	125-250	1	NR
3959†	200	125-250	000	NR

Four-Pole

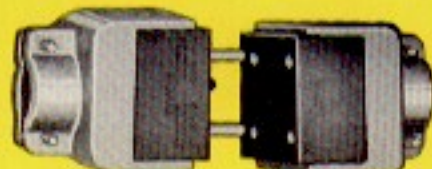


NO. 4950

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE†
4950	5	125-250	14	NR
4955	20	125-250	12	NR
4956	30	125-250	10	NR
4957	60	125-250	4	NR
4958†	100	125-250	1	NR

Multi-Pole




NO. 5950

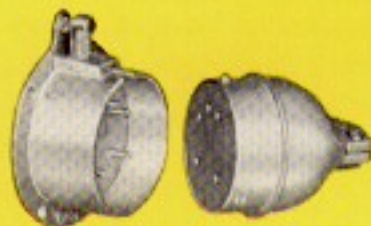

NO. 5950-C



NO. 6950-A

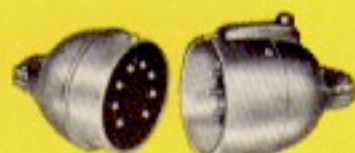


NO. 8950-A

CAT. NO.	AMPS.	VOLTS	STYLE	SHAPE
FIVE-POLES				
5950	5	250	NR	Flat
5950-A	5	125	NR	Round
5950-B§	5	125	NR(F)	Round
5950-C§	5	125	NR(M)	Round
SIX-POLES				
6950	5	250	NR	Flat
6950-A	5	125	NR	Round
6950-B§	5	125	NR(F)	Round
6950-C§	5	125	NR(M)	Round
EIGHT-POLES				
8950-A	5	125	NR	Round
8950-B§	5	125	NR(F)	Round
8950-C§	5	125	NR(M)	Round

Grounded Connectors

These units have the customary number of poles plus an additional pin with terminal provisions for the extra ground wire inherent in such systems. They are similar to standard Kliegl connectors except for this added feature.

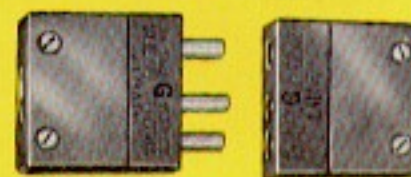

NO. 955-G

Two-Pole PLUS GROUND

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE†
955G*	20	125	12	NR
956G*	30	250	10	NR
957G*	60	250	4	NR
958G*	100	250	1	NR

Three-Pole PLUS GROUND

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE†
3957G*	60	125/250	4	NR
3958G*	100	125/250	1	NR

Four-Pole PLUS GROUND

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE†
4957G*	60	125/250	4	NR

* U/L approved.

† For use in series with switches, and not for closing or opening circuits under load.

‡ R—Reversible, NR—non-reversible. Reversible styles listed can be furnished polarized non-reversible, fitted with fibre pin inserts, at additional cost.

§ For wall mounting (F) Female receptacle (M) Male receptacle. Fibre insulating components on all above. Aluminum casing on all multi-pole connectors except Nos. 5950 and 6950.

KLIEGL CONNECTORS . . .

For over 50 years, Kliegl Pin-Plug Connectors have been the standard for use in theatres, studio, showrooms, garages and industrial plants. Durable — practically indestructible — made only of the finest materials, with electrical capacity far above the U/L approval requirements. Tension exerted by the split male pins, whose close fit and "sweeping action" assures self clearing, low resistance, positive contacts. Listings are of standard sizes. Special units can be made to meet individual job requirements.

Single-Pole



NO. 972

CAT. NO.	AMPS.	VOLTS	CABLE NO.
FIBRE INSULATING COMPONENTS			
971	5	250	14
972	15	250	12
973	30	250	10
PHENOLITE INSULATING COMPONENTS			
974	60	250	4
975†	100	250	1
976†	200	250	000

Two-Pole



REGULAR TYPE—DUPLEX CABLE BOTH ENDS



CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE‡
950*	5	250	14	R
955*	20	250	12	R
956*	30	250	10	R
957*	60	250	4	R
957N*	60	125	4	NR
958†	100	250	1	NR
959†	200	250	000	NR

* U/L approved.

† For use in series with switches, and not for closing or opening circuits under load.

TWO POLE (CONT.)

A.C. TYPE: DUPLEX CABLE ONE END, PAIR SINGLE CONDUCTORS OTHER END

TWO SINGLE
CONDUCTORS



DUPLEX
CABLE

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE‡
950-A. C.	5	250	14	R
955-A. C.	20	250	12	R
956-A. C.	30	250	10	R
957-A. C.	60	250	4	R
958-A. C.†	100	250	1	R

A.A. TYPE: PAIR SINGLE CONDUCTORS BOTH ENDS

TWO SINGLE
CONDUCTORS



TWO SINGLE
CONDUCTORS

CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE‡
950-A. A.	5	250	14	R
955-A. A.	20	250	12	R
956-A. A.	30	250	10	R
957-A. A.	60	250	4	R
958-A. A.†	100	250	1	R

TWO-POLE WITH SPRING CATCH REGULAR TYPE—DUPLEX CABLE BOTH ENDS

NOTE THIS SPRING



NO. 1950


CAT. NO.	AMPS.	VOLTS	CABLE NO.	STYLE‡
1950*	5	250	14	R
1955*	20	250	12	R
1956*	30	250	10	R

‡ R—reversible; NR—non-reversible. Reversible styles listed can be furnished, polarized non-reversible, fitted with fibre pin, at additional cost.

All two pole connectors have fibre insulating components. Aluminum collar regularly furnished on heavy duty connectors Nos. 957N, 958, 959.



WESTFIELD HIGH SCHOOL
WESTFIELD, NEW JERSEY

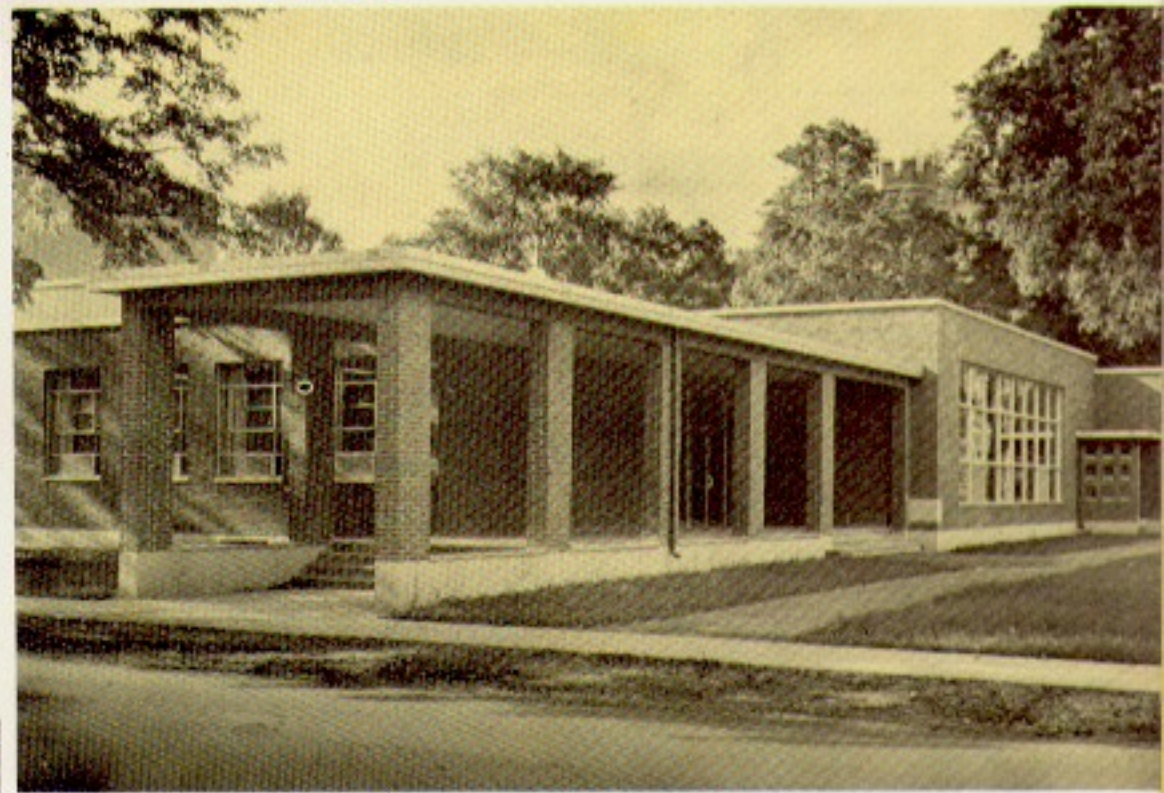

ELMIRA COLLEGE ACTIVITIES BUILDING
ELMIRA, NEW YORK
Fudge & Underhill, Architects & Engineers



CHRIST THE KING SCHOOL
HILLSIDE, NEW JERSEY
William Mitchell, Architect

• State University Teachers
College
Geneseo, New York

• Alice Statler Auditorium
Cornell University
Ithaca, New York

• Stevens Institute of Technology
Theatre
Hoboken, New Jersey

• South Providence Elementary
School
Providence, Rhode Island

• Student Union
Centenary College
Shreveport, Louisiana

• Summit High School
St. Francis Xavier
Newark, New Jersey

• Teatro Maduro
Honduras, C. A.

• Temple Beth-el
Providence, Rhode Island

• Toledo Zoo Amphitheatre
Toledo, Ohio

• U. N. Building
New York City, N. Y.

• Uniondale High School
Hempstead, Long Island

• Vienna Opera House
Vienna, Austria


• War Memorial Auditorium
Rochester, New York

• Westfield High School
Westfield, New Jersey

• Woodland Junior High School
East Meadow, Long Island

• York Community High School
Elmhurst, Illinois

ALICE STATLER AUDITORIUM
 CORNELL UNIVERSITY
 ITHACA, NEW YORK
 Holabird & Root & Burgee, Architects

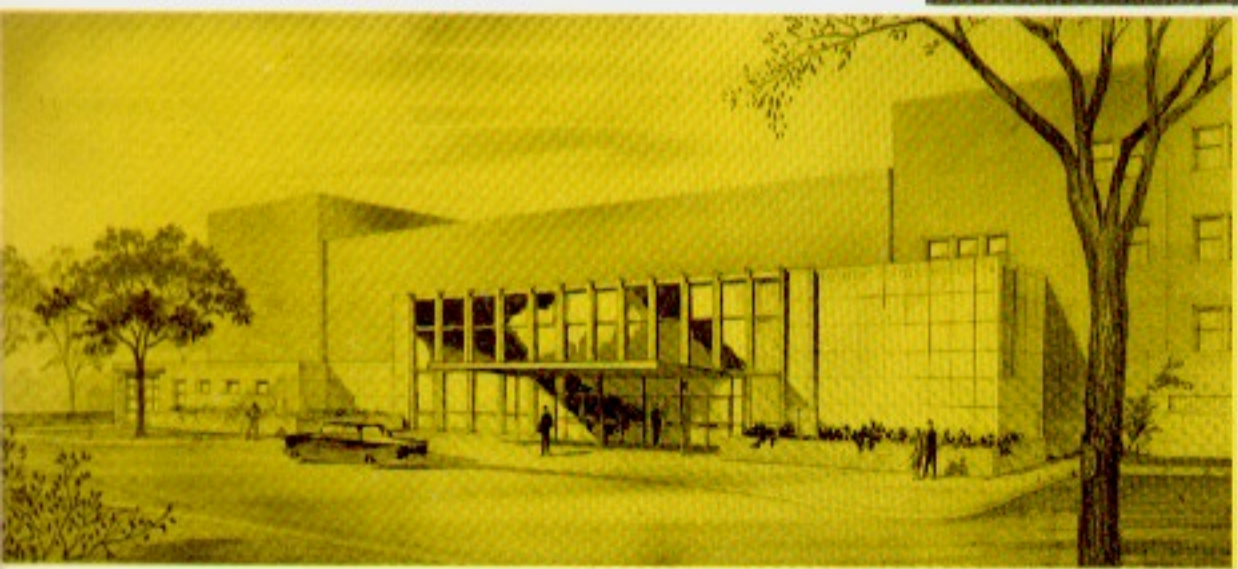

ROCHESTER WAR MEMORIAL
 ROCHESTER, NEW YORK
 Kaelber & Waasdorp, Architects




UNITED NATIONS BUILDING
 NEW YORK CITY



A PARTIAL LIST OF OUR DISTINGUISHED CLIENTELE (cont.)

- National Institute for the Blind
Toronto, Canada
- Newton High School
Newton, New Jersey
- New York City Center
New York City, N. Y.
- New York High School of Printing
and Architectural Drawing
New York City, N. Y.
- North High School
Tucson, Arizona
- Notre Dame School
Elmira, New York
- Parkland School
Siegersville, Pennsylvania
- Passaic Senior High School
Passaic, New Jersey
- Pope Pius XII High School
Passaic, New Jersey
- Presentation Hall
Columbus & Southern Ohio
Electric Co.
Columbus, Ohio
- Public Service Gas & Electric Co.
Auditorium
Newark, New Jersey
- Radio City Music Hall
New York City, N. Y.
- River Road Elementary School
Wilmington, Delaware
- Rivoli Theatre
New York City, N. Y.
- Roxy Theatre
New York City, N. Y.
- Saint Stanislaus Noviate
Lenox, Massachusetts
- Scotch Plains High School
Scotch Plains, New Jersey
- Stanford University
Music Building
Stanford, California

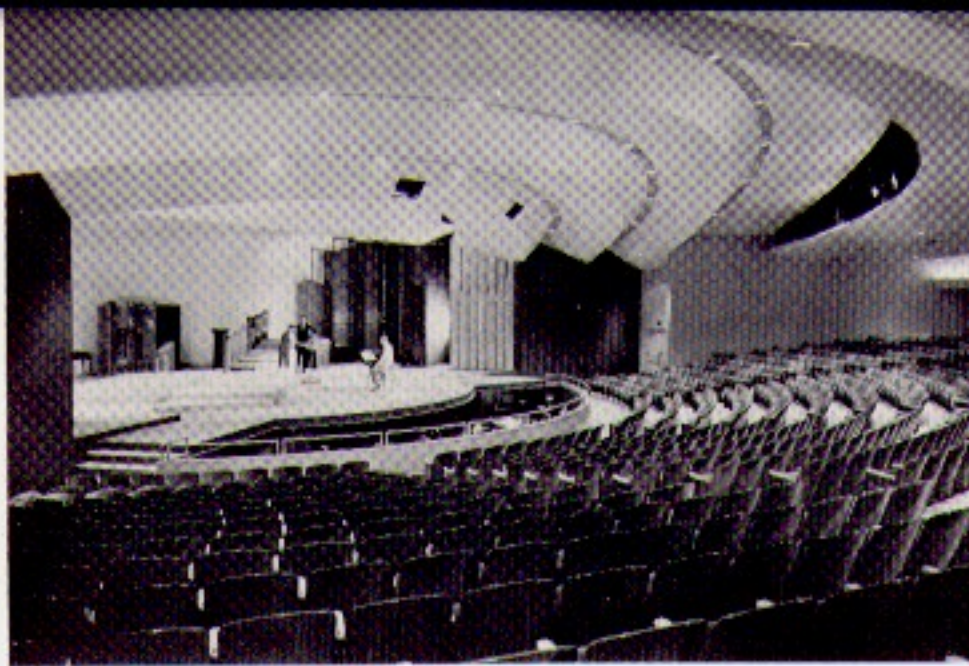


STANFORD UNIVERSITY AUDITORIUM
STANFORD, CALIFORNIA
Pflueger, Spencer & Ambrose, Architects



EWING TOWNSHIP HIGH SCHOOL
TRENTON, NEW JERSEY
Micklewright & Mountford, Architects

MADISON SQUARE GARDEN
NEW YORK CITY

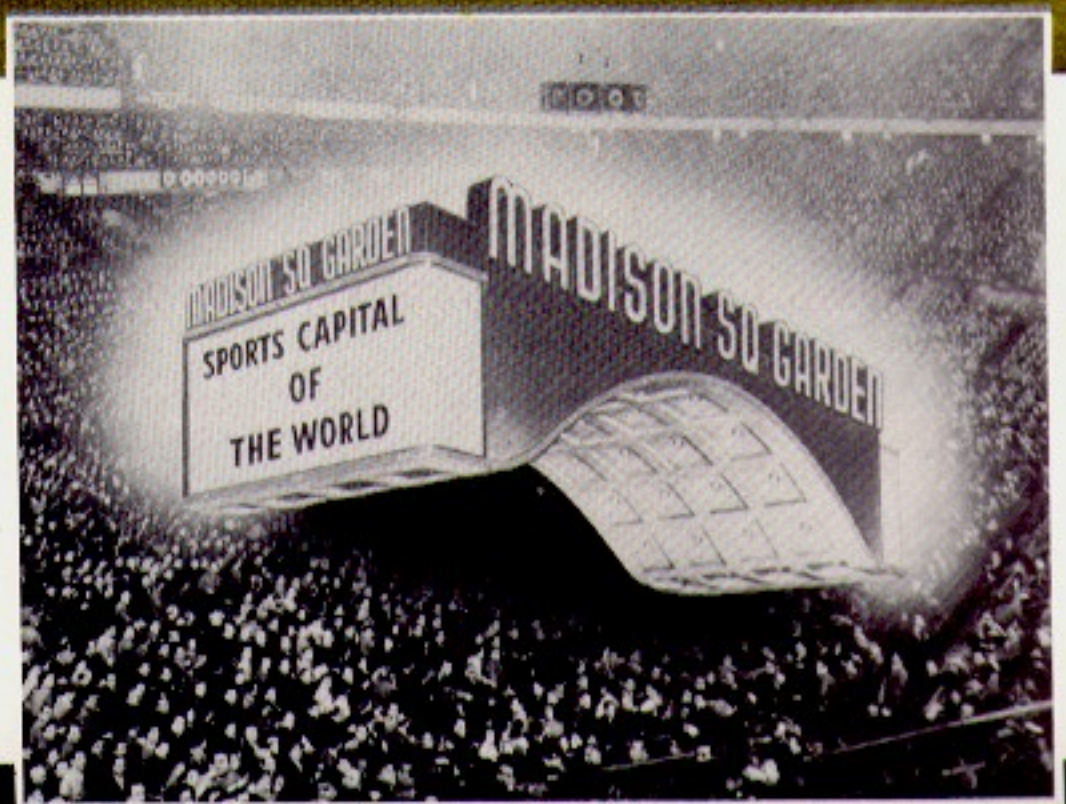

- Glen Ridge High School
Glen Ridge, New Jersey
- Hofstra College
Hempstead, L. I., N. Y.
- Huron Auditorium Arena
Huron, South Dakota
- Immaculate Conception
High School
Lodi, New Jersey
- Immaculate Heart of
Mary Church
Maplewood, N. J.
- Kapaun Memorial High School
Wichita, Kansas
- Kennett Square High School
Kennett Square, Pennsylvania

- Lago High School
Aruba, Netherland West Indies
- Lakewood High School
Lakewood, New Jersey
- Linmoor Junior High School
Columbus, Ohio
- Little Theatre
Charlotte, N. C.
- Livingston High School
Livingston, New Jersey
- Madison Square Garden
New York City, N. Y.
- Marylawn of the Oranges
High School
South Orange, New Jersey

- Marymount College
Speech & Theatre Building
Salinas, Kansas
- Miami University Theatre
Oxford, Ohio
- Middletown High School
Middletown, New Jersey
- Midland Community Theatre
Midland, Texas
- Millburn Senior High School
Millburn, New Jersey
- Morris Hills Regional
High School
Morristown, New Jersey

**KLIEGL
THEATRICAL
LIGHTING
UNITS ARE
SPECIALLY
DESIGNED
TO PROVIDE
UTMOST
EFFICIENCY AND
FLEXIBILITY**

Through the past 63 years we have endeavored to supply our customers with the finest, most modern, best designed and constructed equipment available. The thousands of lighting installations we have done and the discriminating list of our clientele is indicative that we have accomplished this fact in the past. We assure you that we shall continue this aim in the future.

A contributing factor in a Kliegl installation is the effort of our famous planning service which works in cooperation with architects, engineers, consultants and the eventual purchaser of the equipment. This mutual effort insures the use of the most efficient and modern components and designs, and results in an installation precisely tailored to the customers' exacting requirements.

Shown on the following pages are a representative grouping, taken at random, of a few of our most recent installations. We trust no one will feel slighted if their project is not included, but space does not permit us to list all of the jobs of which we are proud.



THOMAS A. EDISON JR. SR. HIGH SCHOOL
ELMIRA HEIGHTS, NEW YORK
Fudge & Underhill, Architects & Engineers

A PARTIAL LIST OF OUR DISTINGUISHED CLIENTELE

- Abington Township High School
Abington, Pennsylvania
- American Academy of
Dramatic Arts
New York City, N. Y.
- Bowdoin College
Theatre Building
Brunswick, Maine
- Carrcroft School
Wilmington, Delaware
- Centenary College Playhouse
Shreveport, Louisiana
- Christ the King School
Hillside, New Jersey
- Church of the Assumption
Morristown, New Jersey
- Clark Regional High School
Clark, New Jersey
- Coke Place Junior High School
Linden, New Jersey
- Consistory Hall
Scottish Rite Temple
Trenton, New Jersey
- Dayton High School
Dayton, Virginia
- East Side School
Newark, New Jersey
- Eastern New Mexico University
Portales, New Mexico
- Thomas Edison Junior
High School
Elmira Heights, New York
- Elmira College Theatre
Elmira College
Elmira, New York
- Emerson School
Plainfield, New Jersey
- Ewing Township High School
Trenton, New Jersey
- Freehold Regional High School
Freehold, New Jersey
- Georgia State College for Women
College Theatre
Milledgeville, Georgia

Individual – Motor Driven **AUTOTRANSFORMERS** For Use in Remote Control Lighting


SUPERIOR

All units are fully enclosed, internally wired and ready for installation. Available with either push button motor control or positioner control.



WARD LEONARD

All units are internally wired and ready for enclosure. Available with either motorlite (push button) control or regulite (potentiometer) control.

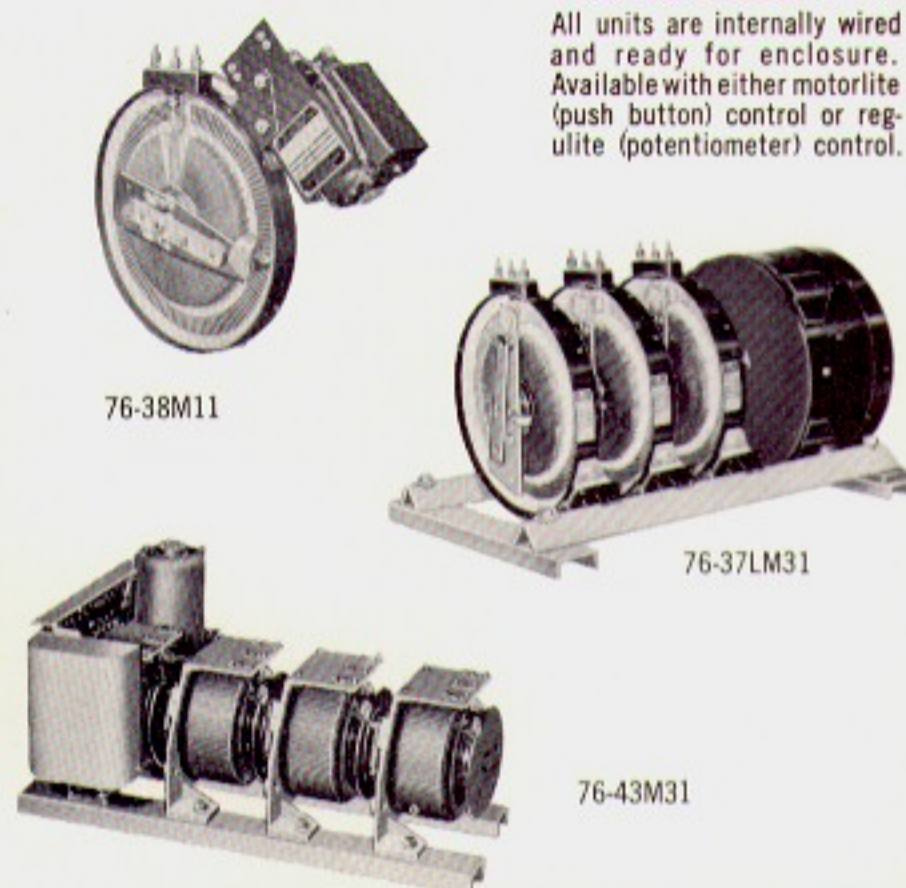

SINGLE PLATE ONE MOTOR	TWO PLATES ONE MOTOR	THREE PLATES ONE MOTOR	FOUR PLATES ONE MOTOR
DMZ2000	DMZ2000-2E	DMZ2000-3E	DMZ2000-4E
DMZ5000	DMZ5000-2E	DMZ5000-3E	DMY5000-4E

Z—6 seconds for full range travel; Y—14 seconds for full range travel. All listed units are for push button motor control. Other speeds, unit sizes, positioner control available. Details sent upon request.


SINGLE PLATE ONE MOTOR	TWO PLATES ONE MOTOR	THREE PLATES ONE MOTOR	FOUR PLATES ONE MOTOR
76-43M11	76-43M21	76-43M31	76-43LM41
76-37M11	76-37M21	76-37LM31	76-37LM41
76-38M11	76-38M21	76-38LM31	76-38LM41

76-43 contains 2.5 kw plates, 76-37 contains 6.6 kw plates, 76-38 contains 8 kw plates. All listed units have a travel time of six seconds, are for Motorlite (push button) control and without cabinets. Other speeds, unit sizes, regulite (potentiometer) control cabinets, etc. available.

Motor or Motorlite Control—Control by a remote toggle switch or push button.

Positioner or Regulite Control—Control by a sensitive low voltage potentiometer for each motor. Permits proportional mastering, presetting, etc.

TRAVELING KLIEGBOARDS

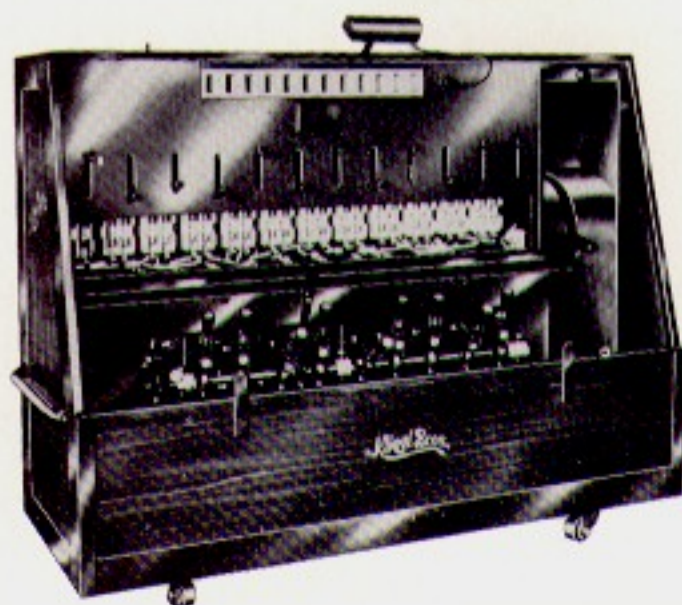

Designed for traveling shows and exhibitions, built in trunk-like box with removable front, lined with sheet metal. Contains all required switches, either resistance or autotransformer type dimmers, plugging receptacles, fuses and related equipment. Properly protected and fused.

Illustrated unit has ten resistance type interlocking dimmers with master handle; fused main switch and 12 branch feeder switches each connected to a fused two-wire plug outlet. Detachable light fixture provides local illumination when board is in operation. Overall measurements 72" long, 56" high, 30" deep.

KLIEGL RESISTANCE DIMMERS


INDIVIDUAL TYPES

ROUND PLATES

Lightweight, smooth easy control. Resistance element encased in vitreous enamel. Good heat distribution. For continuous duty operation at rated capacity at 115 volt service.



1240

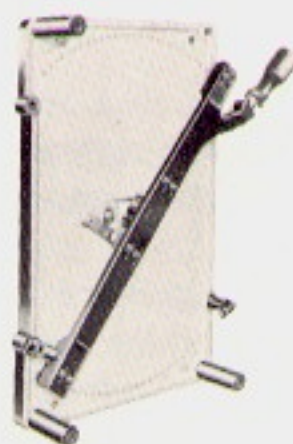

1291

RECTANGULAR PLATES

Shallow cast iron frame with resistance element in vitreous enamel for 115 volt service. Sliding contactor on swinging arm.

ROUND PLATES					
CATALOG NUMBER	WATTS		NO. OF STEPS	NO. & SIZE OF PLATES	WGHT. LBS.
	MIN.	MAX.			
1229	60	150	32	1-8"	10
1230	155	250	32	1-8"	10
1231	255	400	32	1-8"	10
1233	405	550	32	1-8"	10
1234	555	650	32	1-8"	10
1235	655	750	54	1-13"	20
1236	755	1000	54	1-13"	20
1237	1005	1350	54	1-13"	20
1238	1355	1650	68	1-15½"	35
1239	1655	2000	68	1-15½"	35
1240	2005	2450	68	1-18"	40
1241	2455	2700	68	1-18"	40
1242	2705	3000	68	1-18"	40
RECTANGULAR PLATES					
1291	4000	5000	58	1-15"x24"	50

Mounting—Listed dimmers mount flat on wall. Perpendicular to wall available at additional cost.

Higher Voltage—Round plate dimmers available for 2-wire, 220 volt. Prices on request.

Capacity—Lamp load must be kept within indicated limits. Caution—never overload.


Three-Wire Service—Use two dimmers, each rated ½ required capacity. Example—a 3-wire load of 2000 watts requires two No. 1236 1000 watt dimmers.

Installation—Do not connect in parallel. Each plate must carry its own load. They should be connected in series in the neutral or grounded line. Installation must allow for unobstructed air circulation for proper cooling.

Individual—Manual

AUTOTRANSFORMER DIMMERS

SUPERIOR



D5000-2E



D2000



D1000H

AVAILABLE UNITS — 2 WIRE — SINGLE PHASE		
SINGLE UNIT	TWO GANG	THREE GANG
D1000R	D2000-2E*	D2000-3E/
D1000H	D5000-2E*	D5000-3E/
D2000	D5000-2P	D5000-3P
D5000		

* ALSO AVAILABLE — 3 WIRE — SINGLE PHASE
/ ALSO AVAILABLE — 4 WIRE — THREE PHASE

E — 2 or more electrically independent units operated by one handle.
P — 2 or more electrically paralleled units operated by one handle.
1000/2000/5000 — indicates max. watts for individual dimmer plates.
Each unit is enclosed and ready for installation.

WARD LEONARD



NO. 76-43RH10



NO. 76-43RH11

AVAILABLE UNITS — TWO WIRE — SINGLE PHASE		
NUMBER OF DIMMERS	CATALOG NUMBER	
	OPEN TYPE	ENCLOSED TYPE
2.5 KW RATING PER DIMMER		
1	76-43RH10	76-43RH11
2*	76-43RH20	76-43RH21
3†	76-43RH30	76-43RH31
6.6 KW RATING PER DIMMER		
1	76-37RH10	76-37RH11
2*	76-37RH20	76-37RH21
3†	76-37RH30	76-37RH31

* ALSO AVAILABLE — 3 WIRE — SINGLE PHASE
† ALSO AVAILABLE — 3 WIRE — SINGLE PHASE
& 4 WIRE — THREE PHASE

AUTOTRANSFORMER KLIEGBOARD

Motor Operated

For lighting control in churches, restaurants, night clubs, homes, etc., Kliegboards using motor driven autotransformer dimmers have proven the most satisfactory for the usual applications. Operation of motor driven autotransformers does not require the services of a technician; the average layman can operate the unit with perfect ease.

These units are particularly serviceable where frequent intensity changes are not required. Using clearly calibrated potentiometers, it is a simple matter to raise or lower intensities to predetermined levels. The control console, containing the miniature fingertip controls, can always remain in the most desirable location while the motorized dimmer bank can be situated in some remote location.

Motor driven autotransformer dimmers are excellent to incorporate with other boards; they are also suitable for use with Safpatch and Rotolector boards. In addition to the dimming of incandescent lamps, this type of dimmer is recommended for control of both the cold cathode lamps and the hot cathode rapid start fluorescent lamp when used with proper ballasts.

FEATURES :

- Safe, economical—U/L approved
- Variable loading range
- No warm-up time
- Various available speed ranges
- Amenable to one- and two-scene presetting
- High efficiency—low cost
- Cool, quiet operation

POTENTIOMETER CONTROL.

Motorized dimmer bank units are controlled by a sensitive low voltage potentiometer for each motor. This form of control permits pre-selection of desired intensity, presetting, proportional mastering, etc.

SWITCH CONTROL.

Motorized dimmer bank units with remote control switches, circuit breakers, etc., but with push button control instead of potentiometer control.



As motor operated autotransformer boards are manufactured to individual requirements, they are generally furnished with necessary fusing, main switches, transfer switches, etc. The dimmers are available in sizes of 2 kw, 2.5 kw, 5 kw, 6.6 kw and 8 kw units or multiples thereof at speed ranges from six to 45 seconds. All workmanship and materials are of the highest possible standards and no sacrifice of quality or perfection is ever made.

Additional information and data covering the motor driven autotransformer dimmers will be furnished upon request.

MAGNETIC AMPLIFIER KLIEGBOARD for Lighting Control


A Kliegboard using magnetic amplifier dimmers is a form of control that uses the principle of the saturable core reactor. It is designed for direct control of remote heavy current dimming by means of small potentiometers controlling the saturation or desaturation of a magnetic core. Possesses characteristics of practically instantaneous response from potentiometer movements, loading range of 30 to 1, close approximation to the ideal linear lamp output curve. It provides an excellent tool for theatre switchboard use. Boards generally include circuit breaker fusing, main and transfer switches, house-lights, etc.

FEATURES:


- Any number of scene presetting with proportional master and grand mastering available to meet job specifications.
- Instantaneous switching from preset to preset.
- Proportional fading at any desired speed from preset to preset.
- Pile-on of preset on preset either instantaneously or proportionately.
- Control from one or more stations.

THREE TYPES OF CONSOLE CONTROLS


Compact control panel houses all the facilities of a large switchboard yet occupies very little floor space. The magnetic amplifier dimmers may be stored in an out-of-way location with control panel located in the most convenient spot.

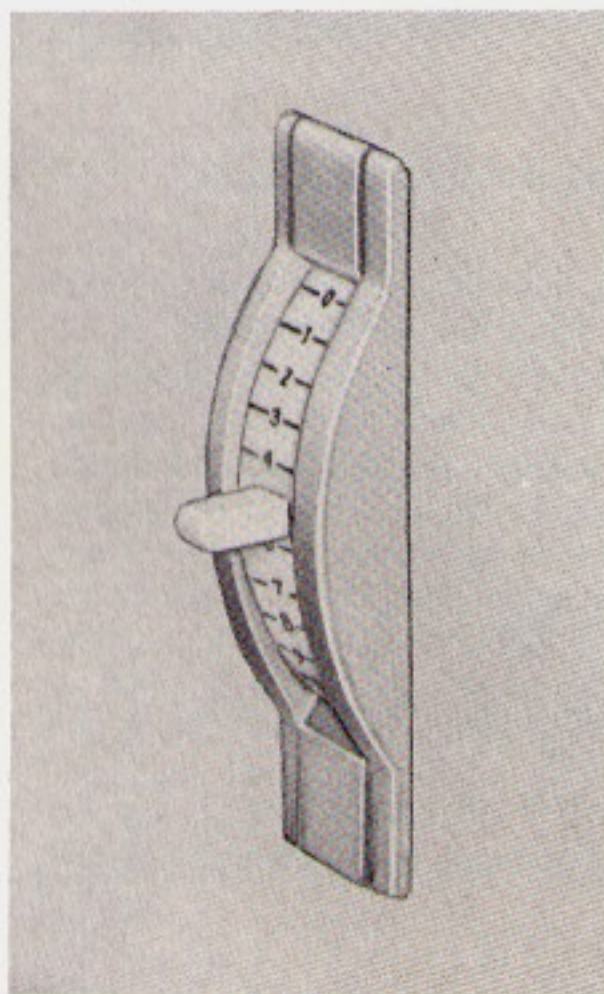

PLUG-IN

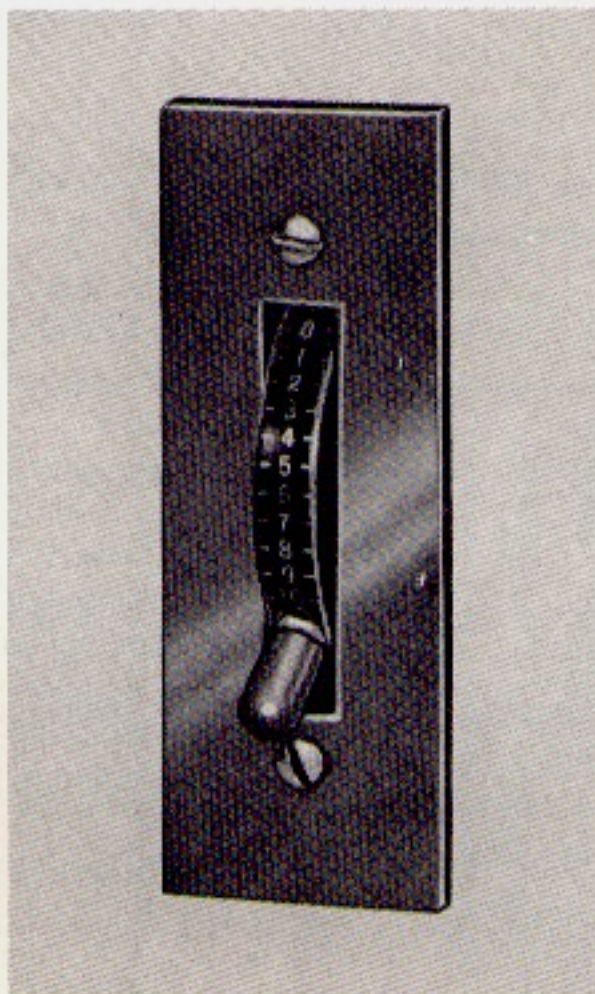

SOLID WIRED

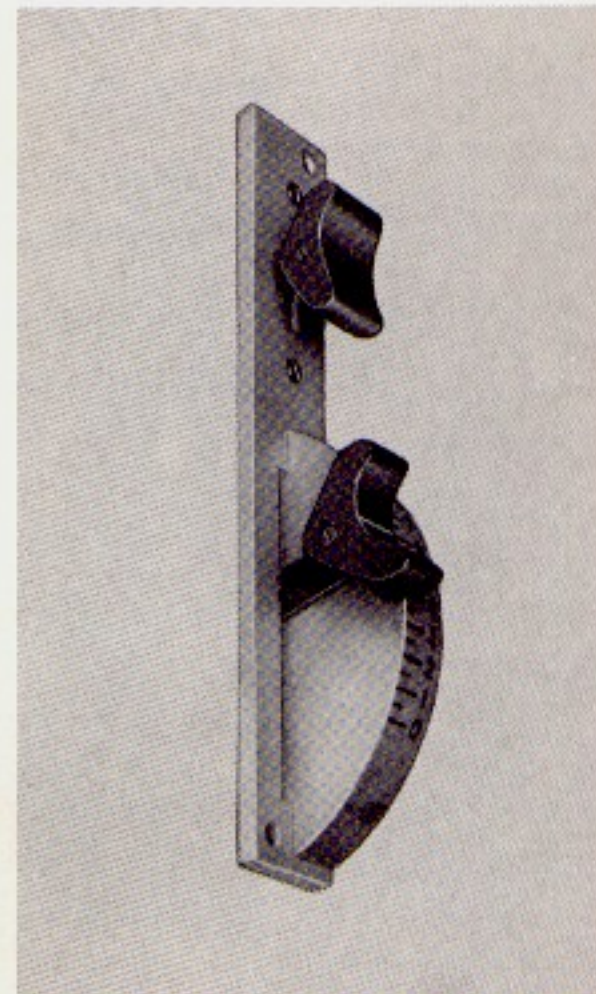

DELUXE PLUG-IN WITH BUILT-IN
INDIVIDUAL SWITCH

No maintenance problems • No moving parts other than dimmer control • Adaptable for small or large installations • Full range available from 3000 watts to 10,000 watts • Loading range of 30 to 1.

Additional information and data will be furnished upon request.

SWITCHING SYSTEMS

of Stage and Theatre Lighting

FEATURES:

- Provides for advance setting of light plots for all scenes. Single push button activates preset scene selector.
- Excellent for rehearsal, allows individual switch control of every lighting circuit during rehearsals, yet allows the final scene selections to be transferred to the memory circuit by simply pushing the selected scene button.
- Permits adding or subtracting a light from a memorized scene without disturbing the balance of the scene.
- Individual scenes or the complete board may be cleared of memorized scene circuits by the simple operation of the "clearance" button plus the scene "memory" buttons.
- Permits direct setting up of additional memory scenes on previously eradicated memorized scene circuits without actually switching on the lights themselves during set-up. When lights are required, they may be switched on by pushing the scene selector button.
- Individual pilot lights, above numbered circuit switches, indicate the actual lights being used in the memorized scene.
- Two or more memorized scenes may be "on" simultaneously. It is possible to pile on additional scenes, or remove scenes, as desired.
- Scene set-up can be repeated as often as desired without resetting as long as selection is allowed to remain in the memory panel.
- Any group or set-up may be held intact while setting up others.
- Retains its memory regardless of power failure or shutdown over any period of time.
- Necessitates fewer dimmers for new installations and provides for greater use of existing dimmer facilities by reusing the dimmers from scene to scene with different lighting circuit connections.


Replaces outmoded methods with the newest in "push-button" operations in the fast moving age of automation.

Kliegl lighting specialists, without obligation, will analyze your lighting control problems. They will offer suggestions on reaching a successful solution, using existing equipment, or if needed, recommending the proper additional units.

Further particulars furnished on request.

KLIEGL PRESET MEMORY

New Technique for the Handling

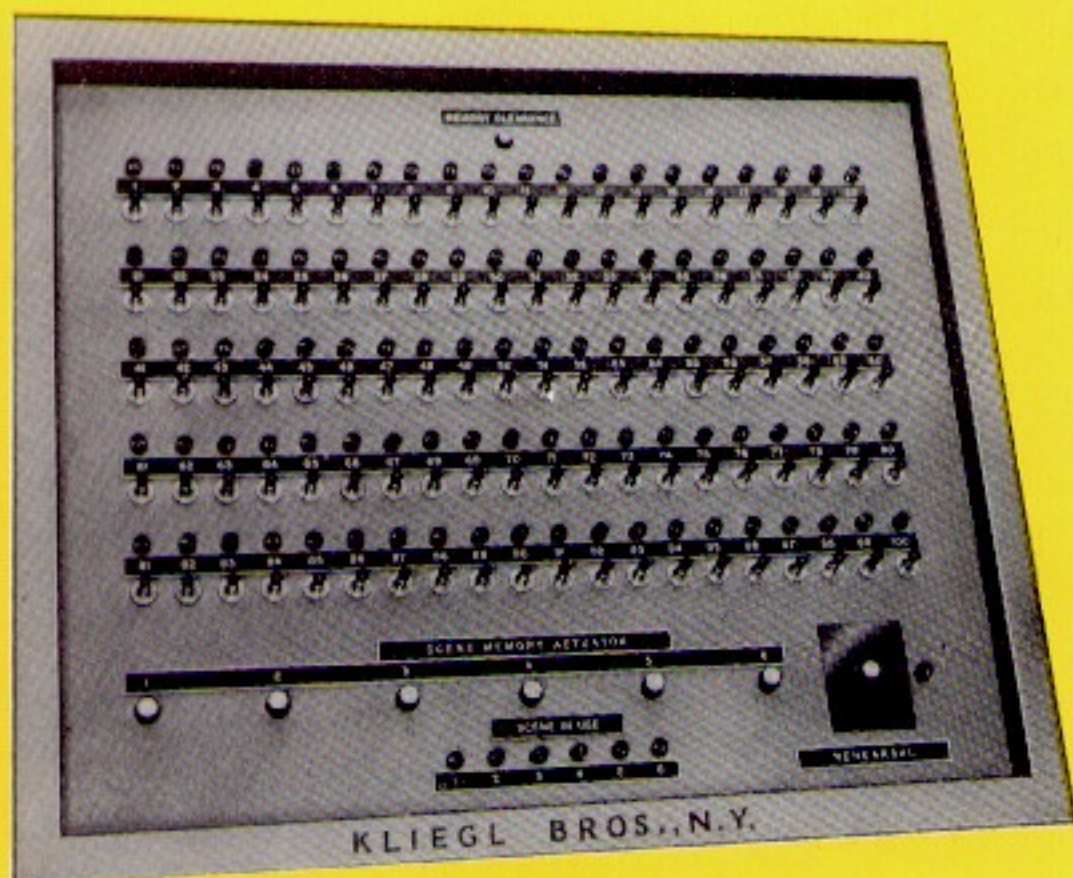


Introducing the first ultra-modern concept, in a preset system for light plots and scene changes. The memory system retains previously selected combinations of light circuits and reactivates them at the will of the operator, as often as desired, until such time as they are deliberately cancelled.



The "Brain Center", serving many light outlets and scene changes, memorizes the selected switching of all lighting circuits in any number of desired scenes or sequences.

The Memory Board serves as an auxiliary device to the Rotolector, Safpatch or other modern interconnecting device. In the memory system, all load circuits that are to be used on a given dimmer during an entire presentation are interconnected to the dimmer. These circuits are then "fed" into the memory panel in a scene-by-scene sequence. The memory panel allows the use of as few or as many of these circuits as desired during the first sequence; the use of the same or different circuits during the second sequence and so on. Thus, all interconnecting for an entire presentation is preselected and "memorized" and can be called or recalled at will.

When used in conjunction with a modern circuit selector unit, the "electro-mechanical-brain" greatly increases the speed, efficiency and versatility of the entire lighting system. This system assures fast, accurate, predetermined scene lighting with fast push button changes from scene to scene, thus reducing the losses and other costly expenditures.

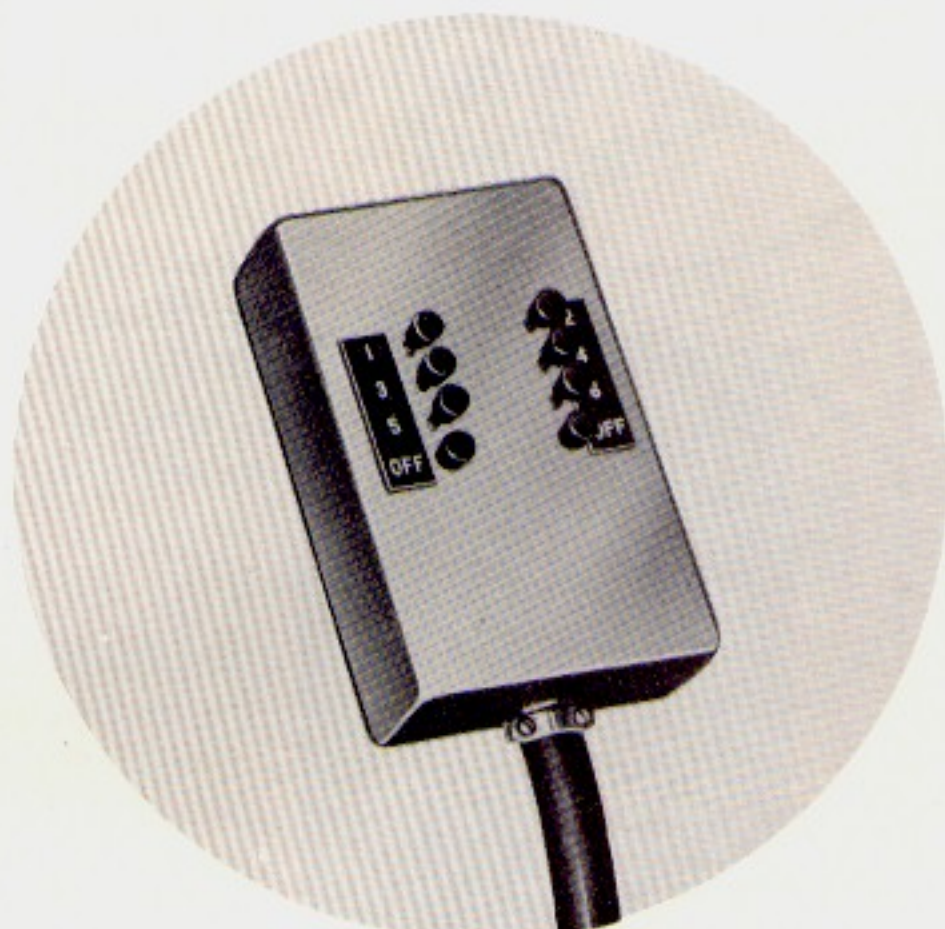


A single push button, per scene, operates the memorized circuits. The operator simply pushes a button and the "memory system" unerringly connects the lights in the manner previously selected for a particular scene.

SAFE, ACCURATE, AUTOMATIC COLD PATCH CIRCUIT SELECTOR


Safpatch Kliegboards, fully U/L approved, are manufactured to the highest possible standards of workmanship and materials. No compromise is ever made with safety or quality. Patch cords are properly counterweighted for automatic restoring when not in use. Despite high standards and quality, reasonable cost puts it within the reach of everyone's budget.

FEATURES:


- Guarantees cold patching.
- Circuit breaker must be off before plug can be inserted.
- Plug automatically trips off circuit breaker on withdrawal, before pin contact is broken.
- No arcing — no pitting of contacts.
- Female receptacles cannot take male plugs of incorrect amperage, preventing overloading.
- 20, 42 and 85 ampere outlets available.
- Circuits protected by standard magnetic type circuit breakers.
- Patch cords properly counterweighted.
- Plug cable clamp relieves strain on terminal.
- Long trouble-free life.
- Simple, automatic, easy operation.
- Reasonable cost — within everyone's budget.

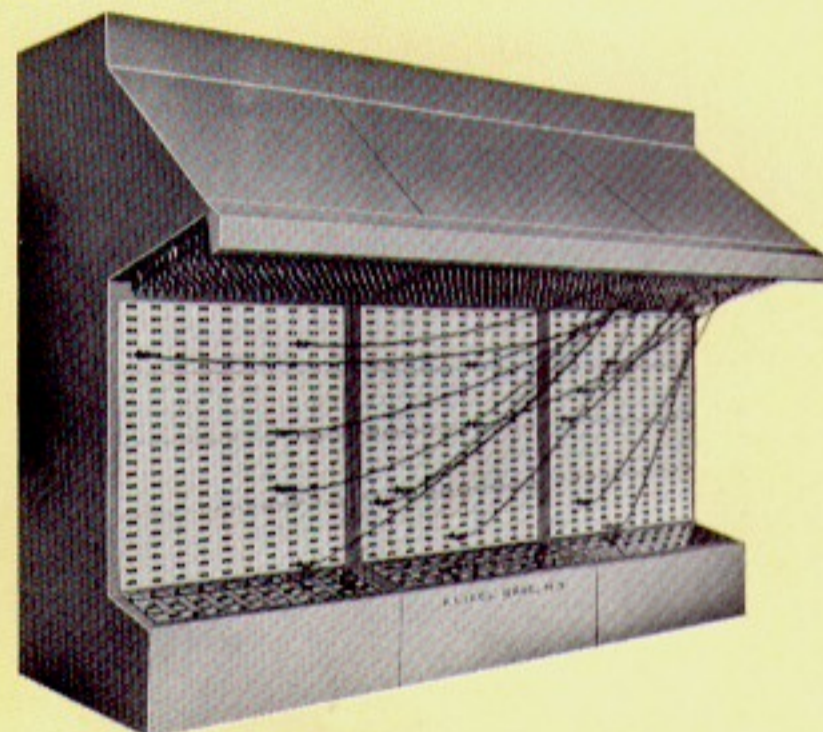

Overhead type of Safpatch Kliegboard containing 720 circuits. Unit is 154½" long, 116" high and 70" deep and was manufactured for NBC Brooklyn.

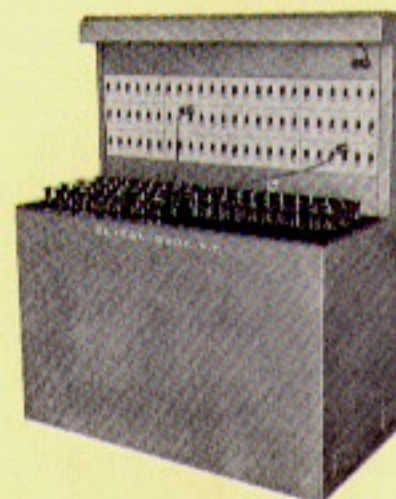


Typical console type Safpatch Kliegboard containing 72 circuits. Unit is 52" long, 60" high and 30" deep.

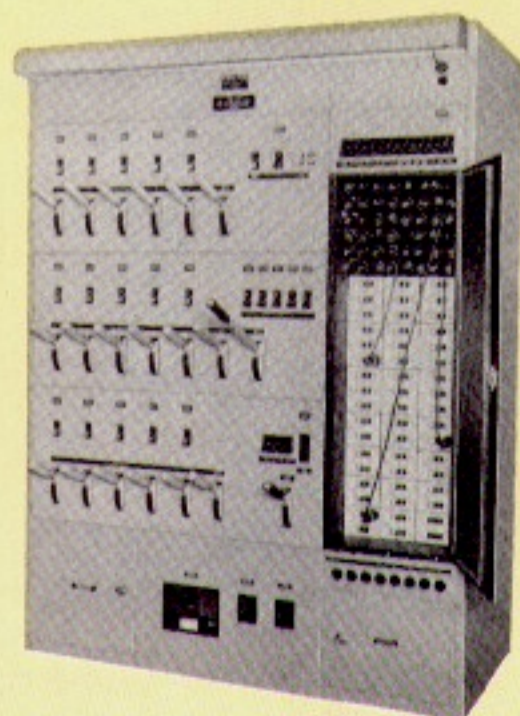


Typical combined Safpatch Kliegboard and upright dimmer board containing 48 Safpatch circuits, 15 dimmers, three sub-masters, one master, one house dimmer and five non-dim circuits. Unit is 62" long, 85" high, 28½" deep and was manufactured for Georgia State College for Women.

Typical combined Safpatch Kliegboard and console dimmer board containing 60 female receptacles, 50 male cross-connecting plugs, 12 dimmers, two sub-masters, three non-dim circuits, and various houselights. Unit is 140" long, 75" high, 29" deep, and was manufactured for Luther Burbank Jr. High School.

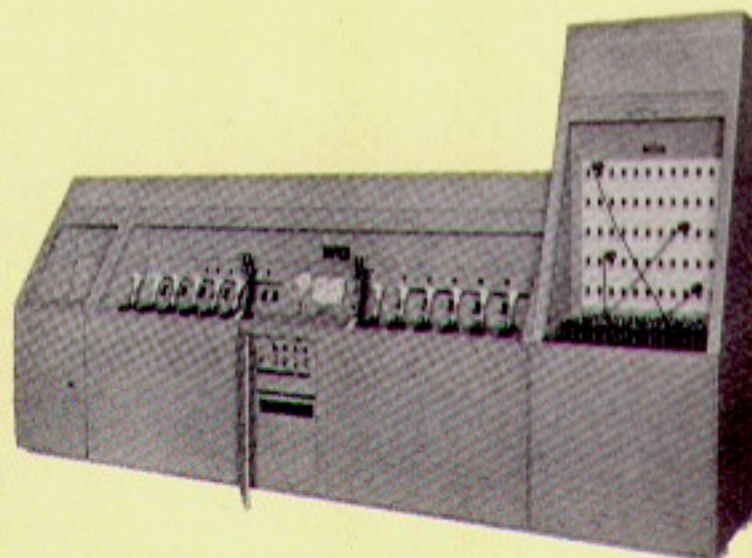

SAFPATCH® KLIEGBOARDS


A Safpatch panel is an interconnecting circuit selector, of the cold patch type, for the cross connection of branch lighting circuits to desired dimming and non-dimming feeder circuits. It is impossible to make or break a connection in a "hot" circuit condition. Exclusive Safpatch features automatically prevent a "hot" make or break, preventing arcing, pitting and deterioration of parts.

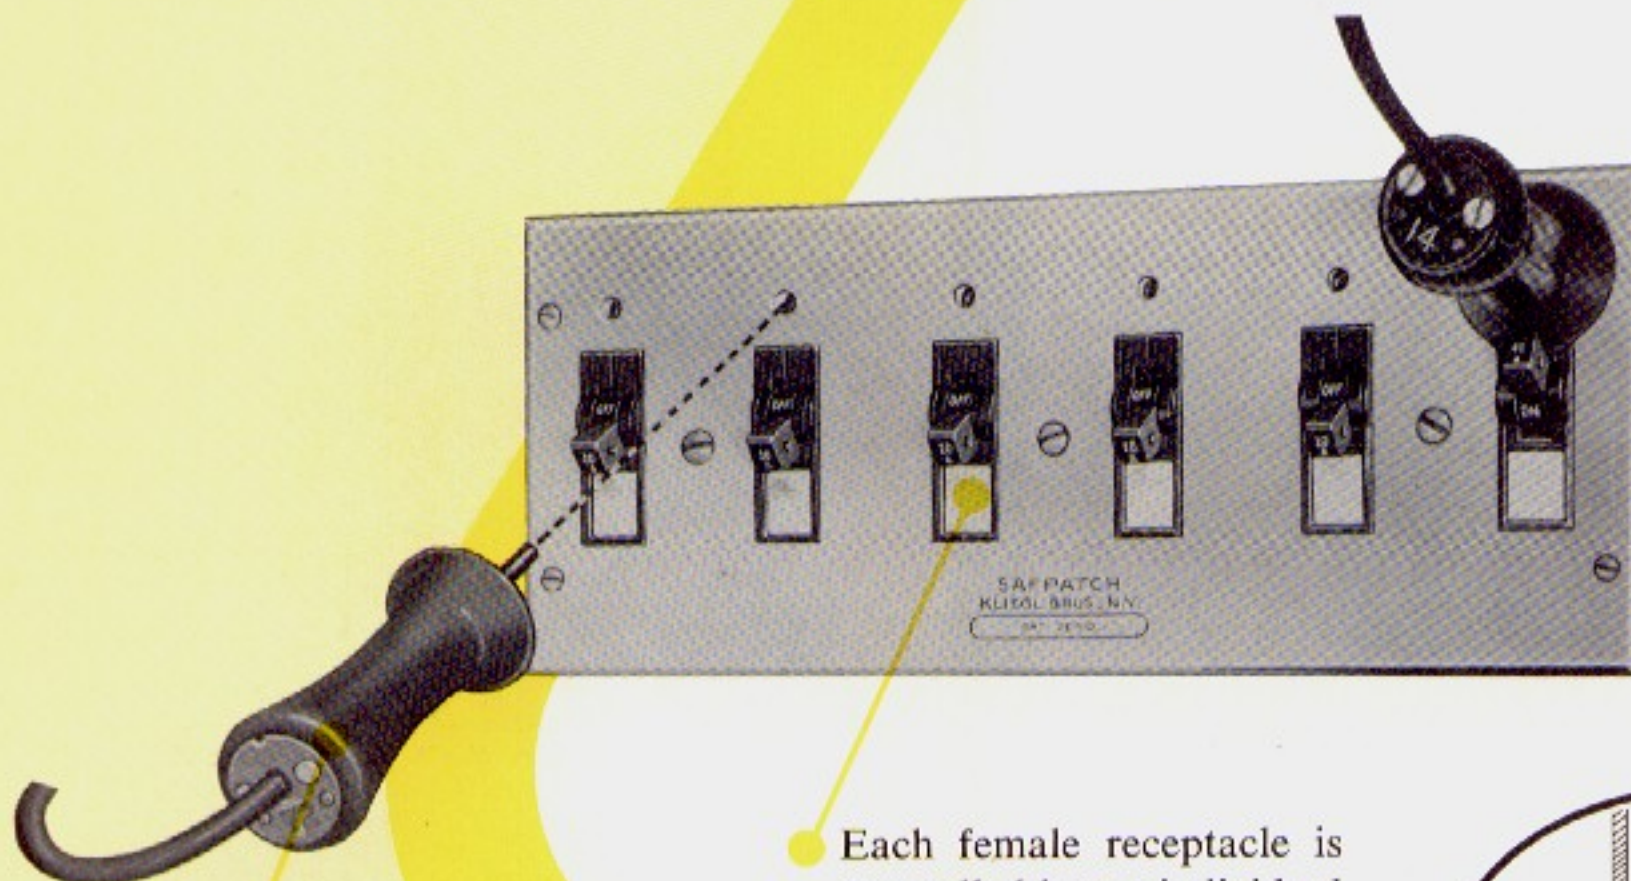


Load plugs are equipped with special cable clamps (another Kliegl exclusive) to eliminate strain on its internal electrical connections.

Each female receptacle is controlled by an individual magnetic type circuit breaker. Each circuit breaker serves as an "on-off" control for its associated receptacle and may be used for interscene changes without affecting other lights. Circuit breakers are silent acting when operated by hand.


Individual standard Safpatch Panels contain 6 female receptacles of required amperage. Multiples of these panels are grouped to form a complete board. Wiring of panels is according to individual requirements with any desired number of female receptacles wired together to designated dimming or non-dimming feeder circuits. This may include two or more receptacles to a circuit.

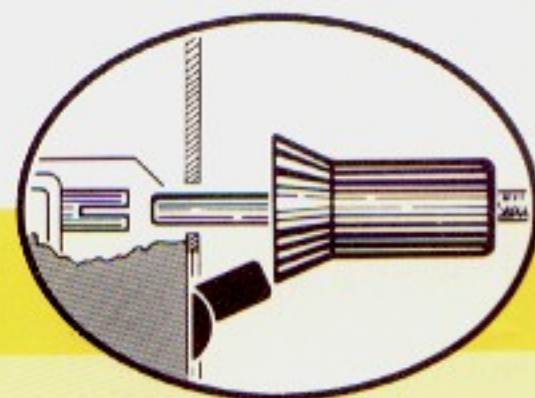

CAN'T "MAKE" HOT

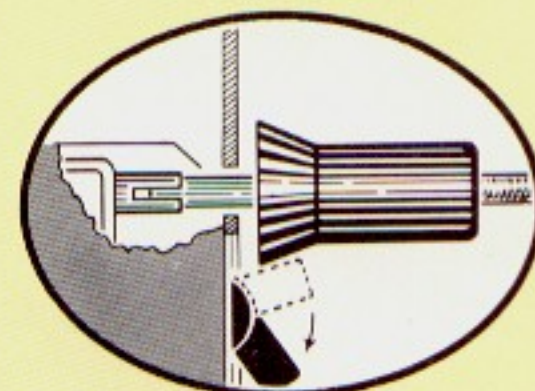


CAN'T "BREAK" HOT

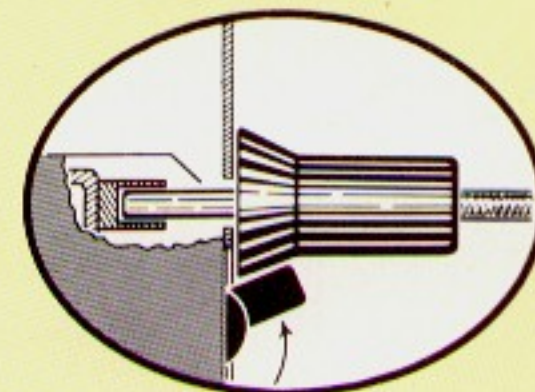


ONLY WAY — SAFPATCH

Finest, Safest Rotary Circuit Selector with Automatic Cold Make or Break

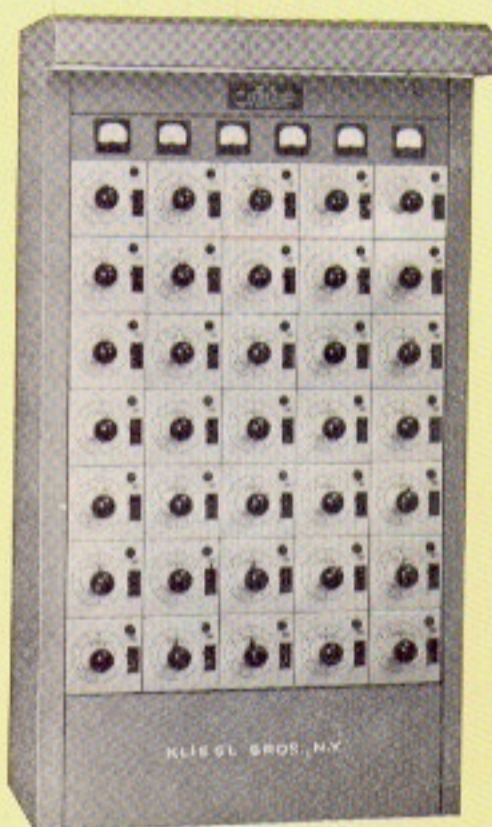


Typical Rotolector Klieglboard with 35 twelve-point Rotolector outlets. Feeder circuit ammeters shown are optional equipment. Unit is 36½" long, 72" high and 15" deep.

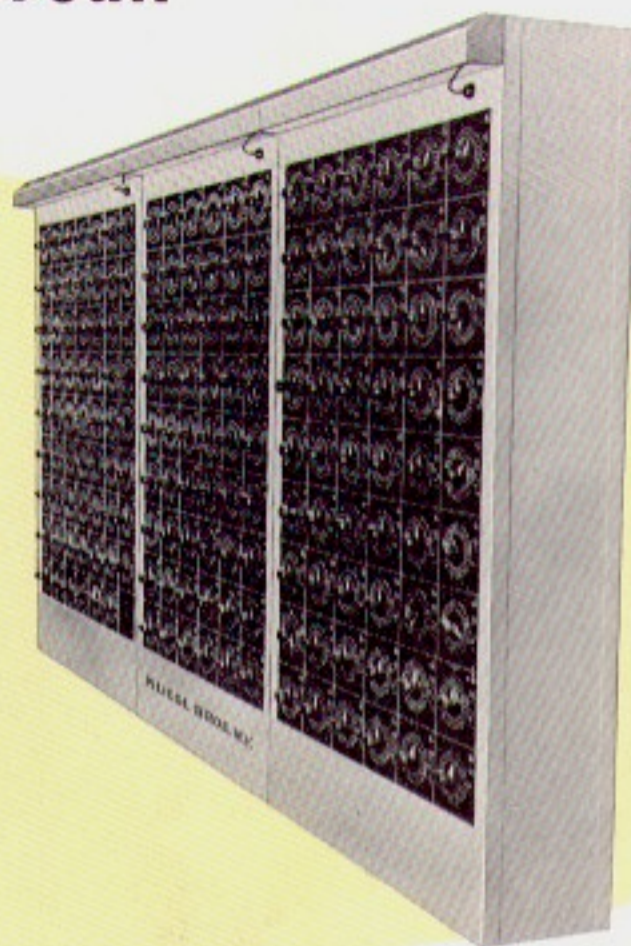

Large scale Rotolector Klieglboard. Unit contains a total of 150 twenty-four-point Rotolectors. Entire bank is 85" high, 136" long and 15" deep.

Each Rotolector circuit selector is protected by an individual built-in magnetic type circuit breaker which serves as an "on-off" control for its associated selector and which may be operated by hand for inter-scene changes. Each Rotolector is 6½" x 6½" and is furnished with either 12 or 24 circuit positions from 20 to 42 amperes.

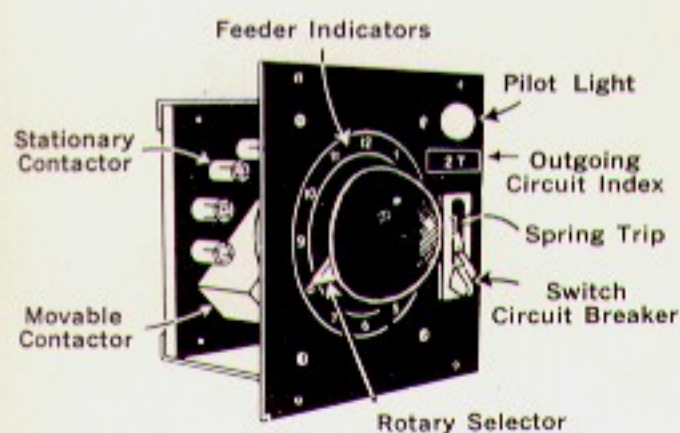

12 POINT ROTOLECTOR UNIT

Schematic of KLIEGL "ROTOLECTOR" System

One ROTOLECTOR for each light outlet permits selective servicing

Light outlet may be connected through Rotolector to any one of twelve master service sources

Bank of ROTOLECTORS provide control for any desired number of light outlets


Several light outlets may be grouped for control from any selected master service circuit

PILOT LIGHT shows when circuit is energized

CIRCUIT BREAKER permits individual light outlet control with protection from overload

Variable Voltage Sources dimming circuits Nos. 1-10

Constant Voltage Sources non-dim circuits Nos. 11-12

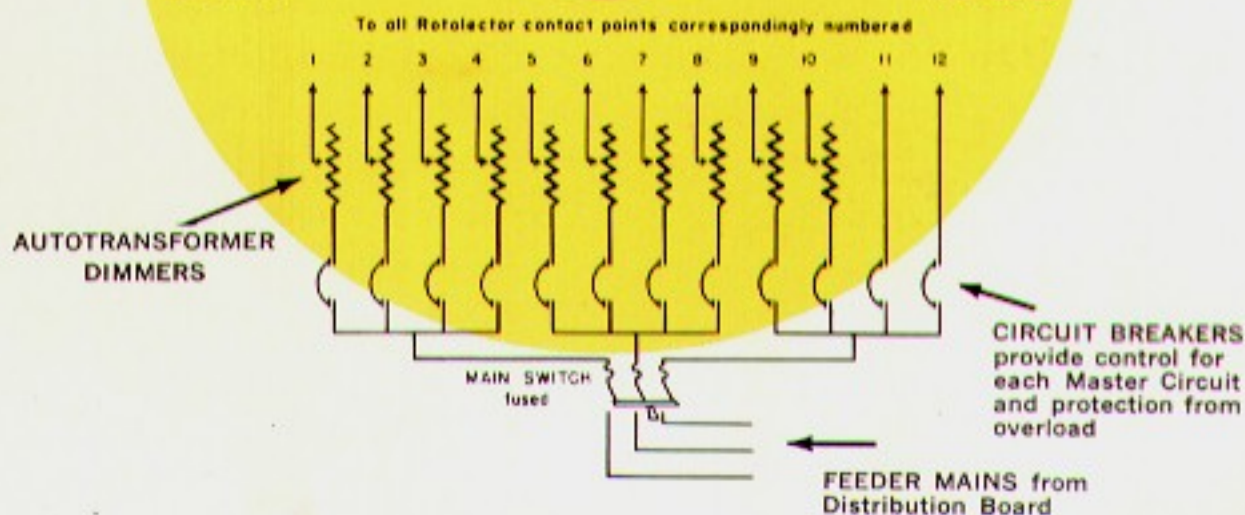


ROTOLECTOR®* KLIEGBOARDS

A rotolector is an interconnecting rotary circuit selector, used to connect branch lighting circuits to various dimming or non-dimming feeder circuits. It is the finest, fastest, simplest solution to the popular demand for interconnecting circuit selectors; eliminates the use of patch cords and plugs.


Each Rotolector is directly connected to a load circuit. The numbers on the dial of the Rotolector indicate the various dimming or non-dimming feeder circuits to which the load circuits may be connected. This convenient rotary selector control makes fast, accurate circuit selection a simple "twist of the wrist" operation. The entire procedure is so elemental that a child can operate the unit with complete confidence and safety.

* Patented

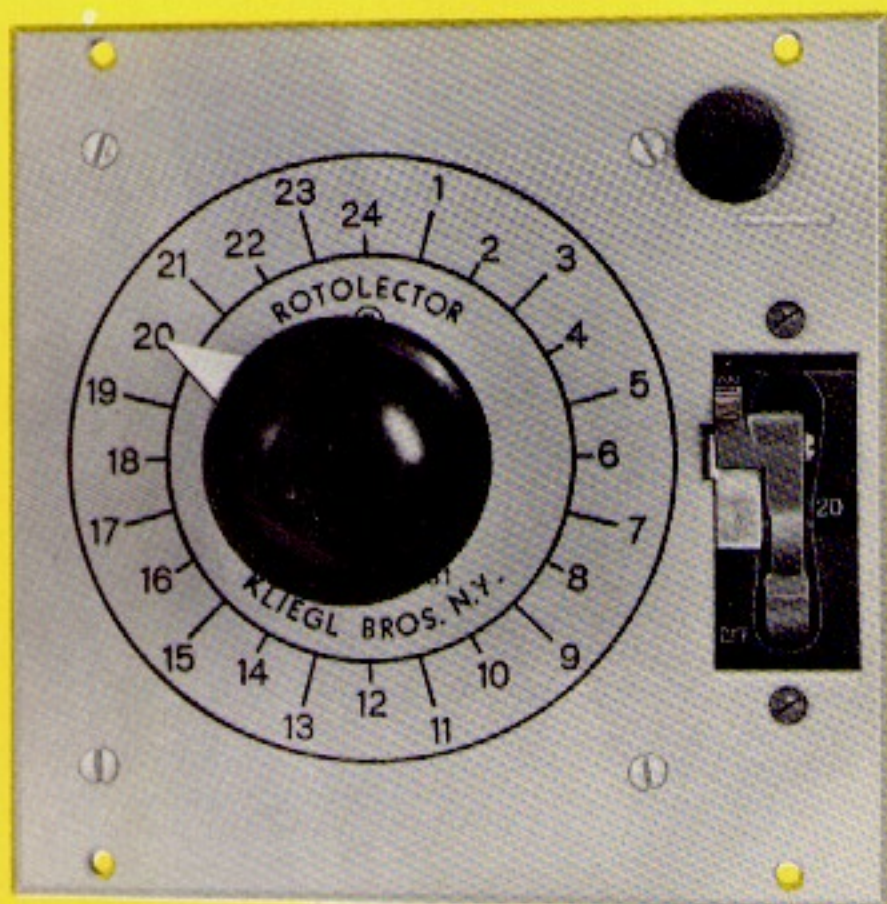


FEATURES:

- Simplified, high speed operation. Simply turn the dial of the selected load circuit to desired dimming or non-dimming feeder circuit, push in and turn on circuit breaker switch.
- Circuit breaker is automatically tripped, breaking "hot" connection before change in feeder selection can be made.
- Guarantees cold make and break — no arcing — no pitting of contacts.
- Correct design — neat appearance — instant visual circuit identifications — finest workmanship.
- Long trouble-free life — simple, automatic, easy operation — highest safety standards.
- Circuits protected by standard magnetic type circuit breakers.
- Circuits may be preset and "turned on" or "turned off" as desired.
- 12 to 24 circuit units — available to 42 amperes.
- U/L approved.

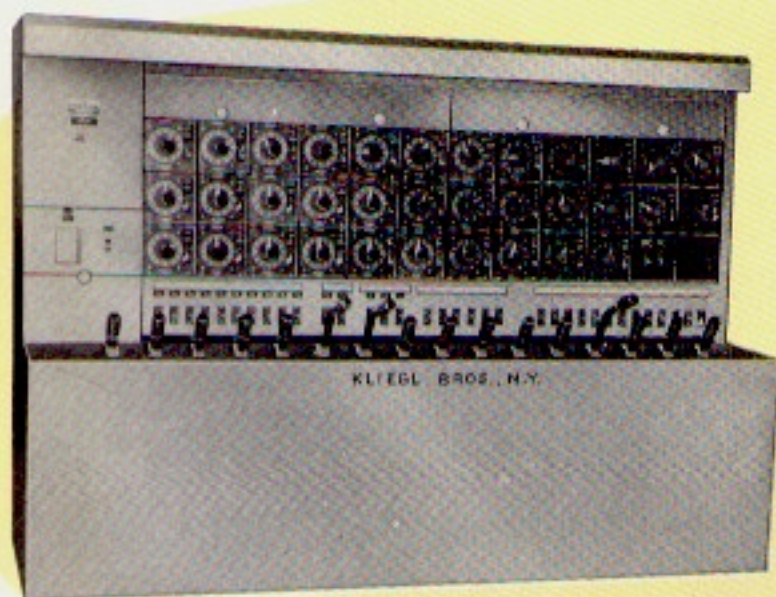


Combined Rotolector and dimming board. Unit contains 34 twelve-point Rotolectors, 13 dimmers, three sub-masters, eight non-dim circuits, and various required houselights. It is 93" long, 67" high and 25½" deep.

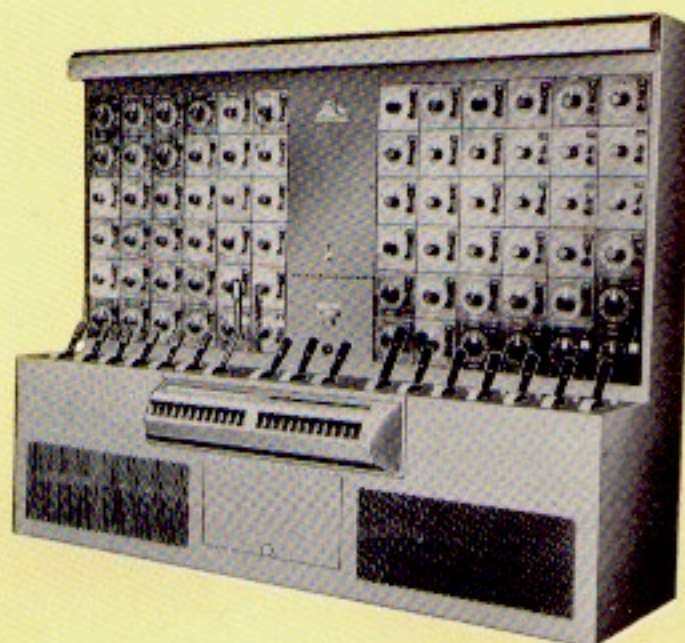



Twin bank combined console dimmer and Rotolector panel. Each bank contains 36 twelve-point Rotolectors, six dimmers, one master, six non-dim circuits, misc. houselights. Overall dimensions are: 80" long, 74" high and 32" deep.

Fully Electronic Lighting Control


Separate preset scene banks may be had for use with the control console. They are available with any number of desired scenes. Typical types are five-scene (illustrated) and ten-scene preset banks.

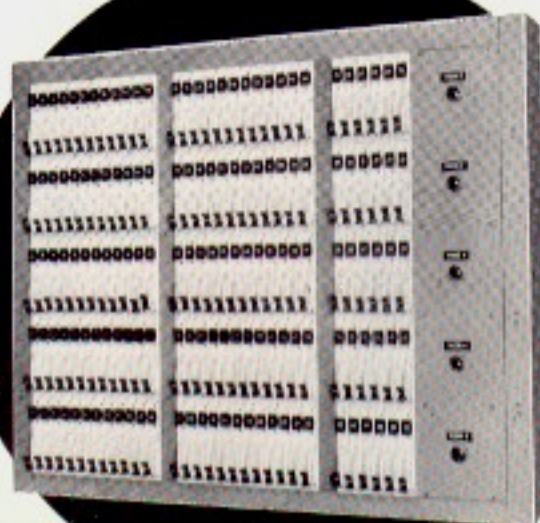

Kliegtronic control consoles are neat, compact units incorporating flexibility and functionality. Illustrated unit has two-scene preset, four sub-masters, two grand-masters and scene fader/changer. Other models manufactured to meet individual requirements.

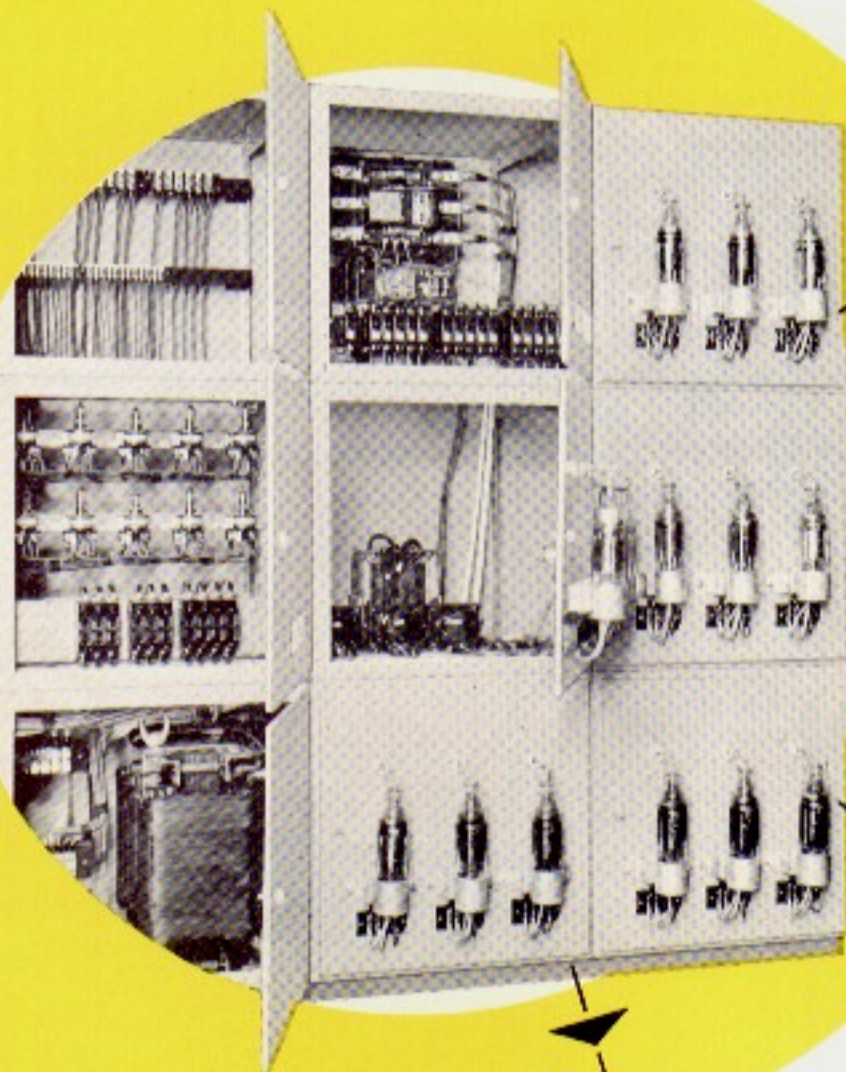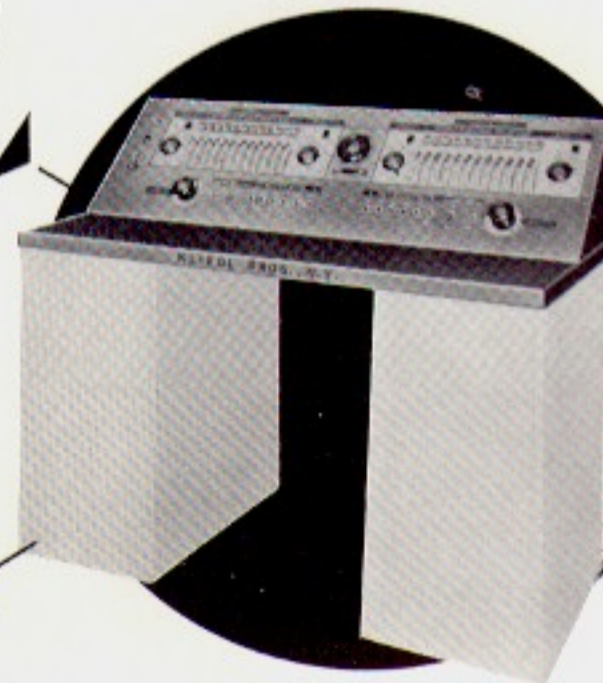


Kliegtronic switchboards are available with individual circuit ratings of 2500-5000-7500 watts. Each dimmer circuit is controlled by three thyatron tubes. At right is a typical remote unit housing with thyatron tubes and all related components in compartmental construction. The size of each compartment is 24" long, 24" high and 24" wide.

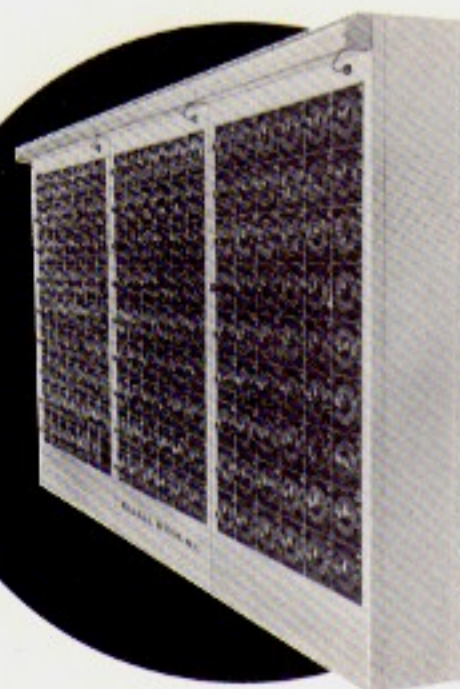

A Rotolector unit for the interconnection of loads to desired dimmers.

A Safpatch unit for the interconnection of loads to desired dimmers.

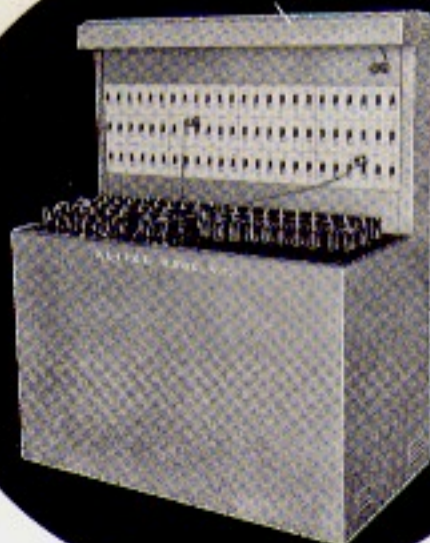

KLIEGTRONIC®*


The Kliegtronic Lighting Control is an all-electronic switching and dimming device. It is designed to operate from 3-phase 60-cycle A.C. lines and, as such, it possesses a number of unique features not inherent in other systems of electronic or manual dimmer control, while at the same time incorporating the normal circuit breaker fusing, main and transfer switches, houselights, etc. which may be required.

* pat. applied for

FEATURES:

- Load, regardless of size, is automatically balanced over three phases of supply since three thyatron tubes per dimmer circuit pass equal amounts of current from each phase during respective periods of conduction.
- Dimmer circuit is not rendered inoperative by loss of power in one phase or end of life of a tube. Two tubes in the circuit have $\frac{2}{3}$ capacity at slightly reduced voltage.
- No voltage exceeds the applied line voltage.
- Voltage adjustment provided to permit setting output voltage at desired level, i.e. 110, 115 or 120 volts.
- The load-voltage/dimmer handle travel ratio is unaffected by variation in load. Dimmer setting does not change with change in load.
- Transition from one preset condition to another is direct and smooth. There is no fluctuation in light intensity during the change, i.e. a lamp to be dimmed becomes dimmer while another to be brightened becomes brighter.
- There is only one moving part per circuit other than the switch.
- Compact finger-tip controls properly located to give greatest operational ease. Straight forward arrangement provides for maximum operational speed.
- Extreme lighting flexibility provided through masters, sub-masters and pre-sets. Direct transition to preselected lighting through fader.
- Exceptionally wide load range. Each dimmer circuit will properly dim from less than six watts to full rated capacity.
- Instant response to dimmer handle movement. No time lag for either "on" or "off" position.
- No radiated field to cause electronic or TV interference.
- Potentiometer control readings are very closely allied to light intensity readings.
- Instant blackout.
- Full circuit voltage load delivered—no voltage loss—no boosters required.
- Unit has complete stability; only two adjustment controls for entire board which once set need never be adjusted.
- Low maintenance costs. Estimated tube life, 10,000 hours. Magnetic type circuit breaker protects each thyatron tube.
- Entire system is delivered with all internal component wiring complete and brought to terminal strips ready for feeder and load connections.
- Each unit and all components are fully inspected and factory tested at full rated capacity.


Easily replaceable plug-in potentiometers comprise the only moving parts other than the small control switches.

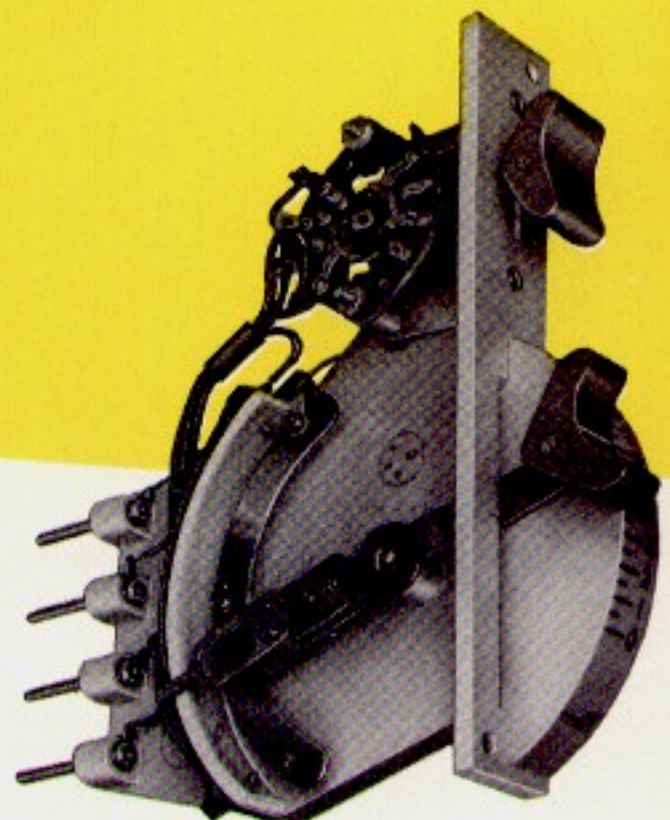

TRANSFORMER KLIEGBOARDS






Combined upright dimming board and Safpatch unit. Illustrated unit contains 15 dimmers, three sub-masters, one grand master, five non-dim circuits, houselights, 49 female receptacles and 48 male cross-connecting plugs. It was manufactured for Georgia State College For Women and is 62" long, 85" high and 28½" deep.


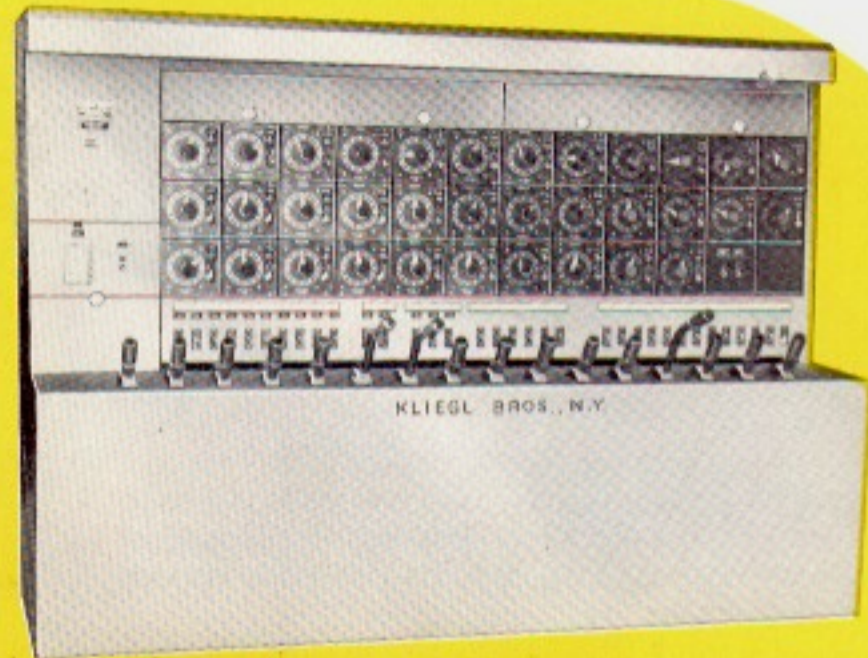


Combined console dimming board and Rotolector unit. Illustrated unit contains 13 dimmers, three sub-masters, eight non-dim circuits, miscellaneous houselights, and 34 Rotolector outlets. It was manufactured for Summit High School and is 93" long, 67" high and 25½" deep.

Combined console dimming board and Safpatch unit. Illustrated unit contains 12 dimmers, two sub-masters, three non-dim circuits, houselights, 60 female receptacles and 50 male cross-connecting plugs. It was manufactured for Luther Burbank Jr. High School and is 140" long, 75" high and 29" deep.

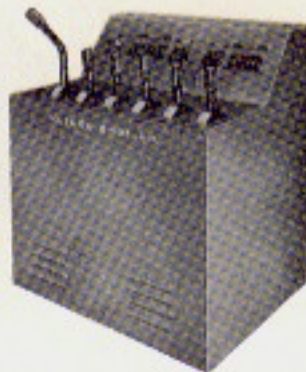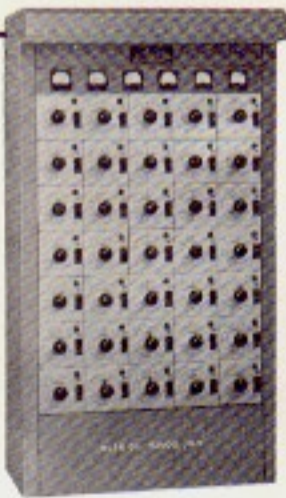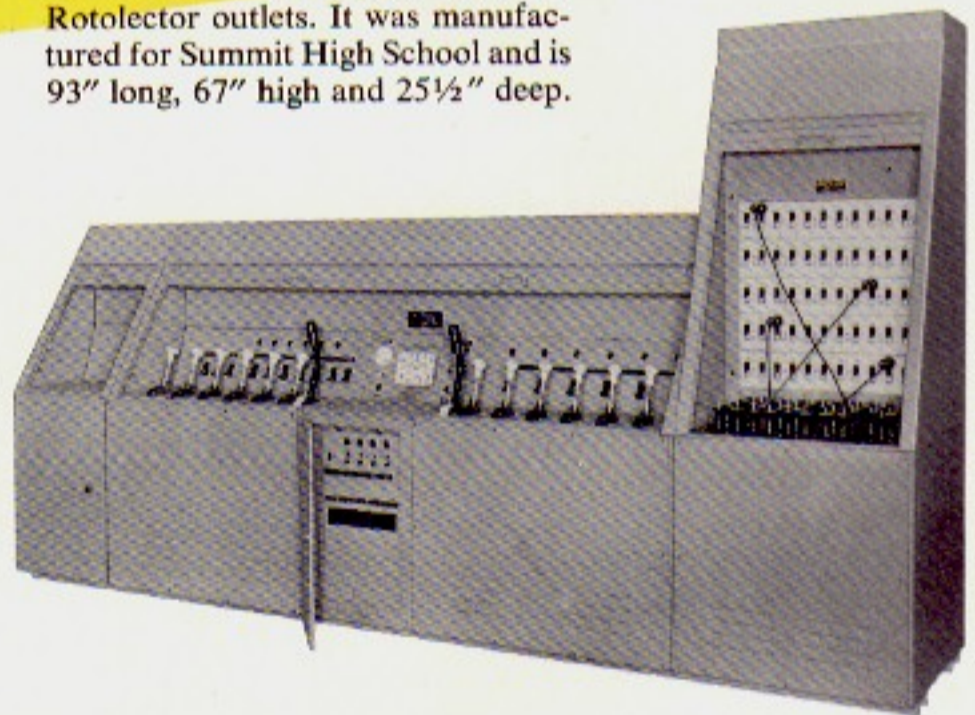

Console dimming board and upright Rotolector Panel. Set contains five dimmers, one master, seven non-dim circuits and 35 twelve-point Rotolectors.

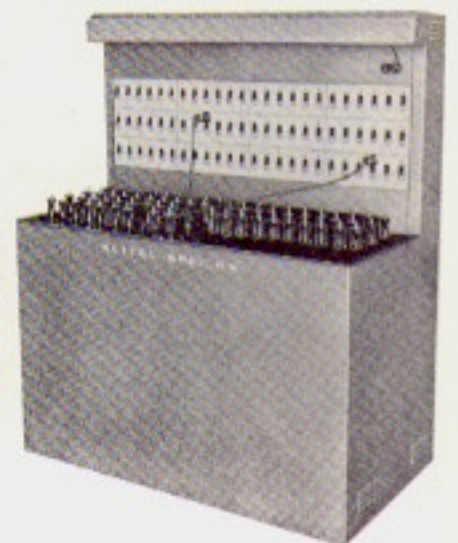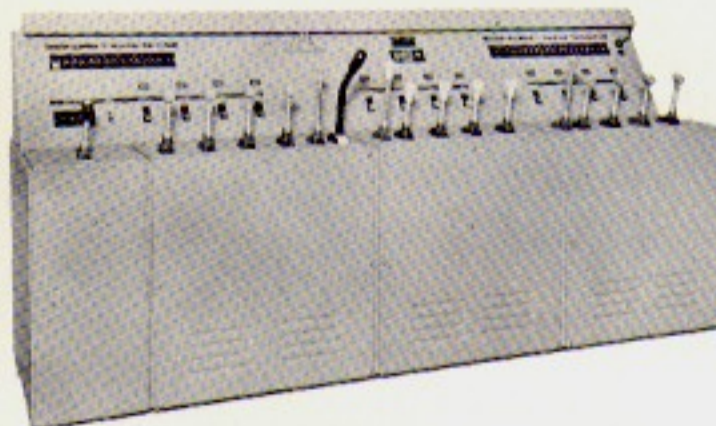

Console dimming board and console Safpatch panel. Set contains 12 dimmers, three sub-masters, one grand master, necessary houselights, 72 female receptacles and 80 male cross-connecting plugs.


MANUALLY OPERATED AUTO

Kliegl Bros. dimmer switchboards include only the finest workmanship and materials. They are designed to satisfy individual needs, whatever the size or output requirements. All dimmers are controllable by individual operating handles and in addition may be coupled to sub-master and grand master levers, if desired. All control levers are properly colored, labelled and grouped for easy identification and use. Each dimmer is protected by a magnetic type circuit breaker, which can serve as an "on-off" switch; additional circuit breakers are provided for outgoing circuits. Board can also contain circuit breaker switches for non-dim circuits, worklights, musicians' stands as well as remote control switches and transfer switches for houselight emergency if desired.


FEATURES:

- Ideally suited for general usage.
- Has negligible electrical losses or heating effect.
- Available in large variety of sizes and designs.
- Virtually no maintenance required.
- Full loading range—from fractional watts to rated capacity.
- Interlocking or non-interlocking controls.
- Magnetic type circuit breaker protection on primary and secondary.
- Available from 2000 watts to 8000 watts per dimmer unit.
- Can easily be combined with Rotolector or Safpatch unit.

Kliegl autotransformer dimmers are furnished as console or upright models; either as solid circuit types, to be used independently, or to be used in conjunction with Safpatch or Rotolector Boards. They are also furnished as combined units incorporating either Rotolector or Safpatch components.

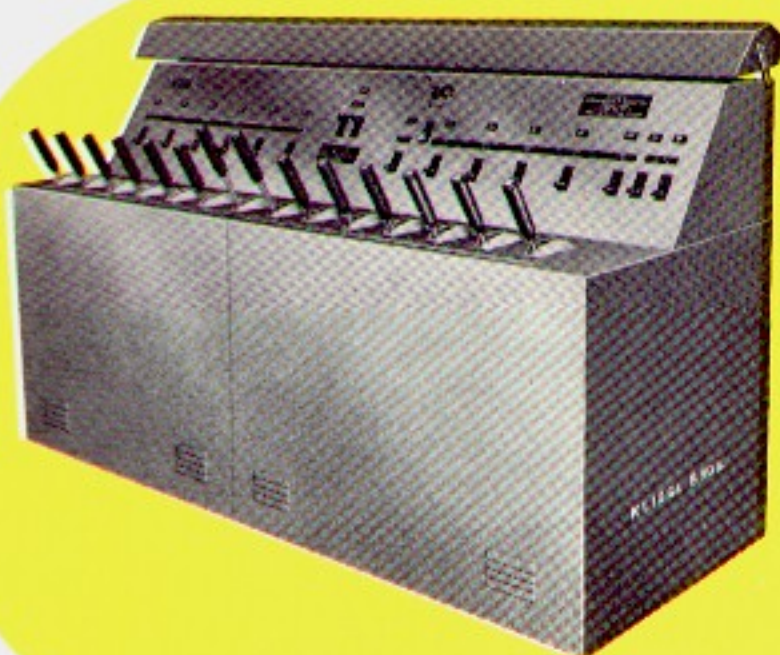

Typical solid circuit console board. Illustrated unit contains 12 dimmers, controlled by two masters, two non-dim circuits and necessary houselights. It was manufactured for the American Academy of Dramatic Arts and is 76" long, 40" high and 28" deep.

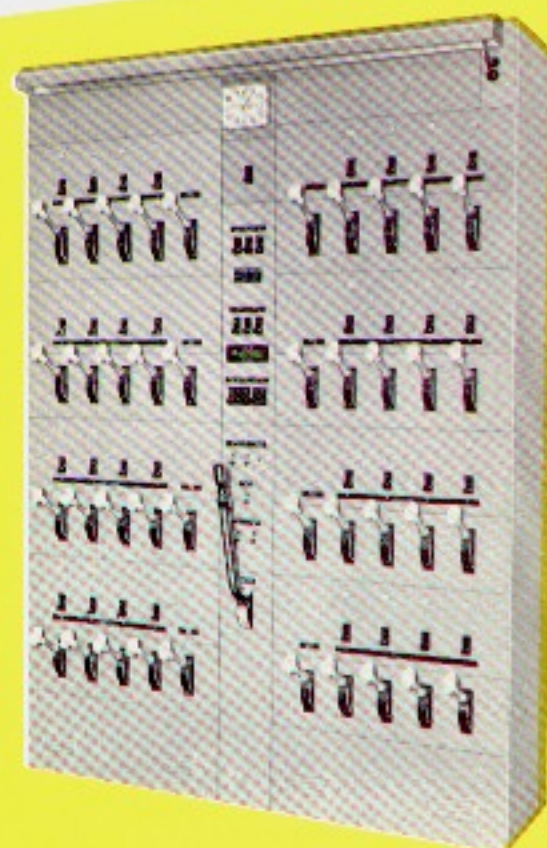

Typical solid circuit upright board. Illustrated unit contains 32 dimmers, controlled by eight sub-masters and one grand master, five non-dim circuits and various houselights. It was manufactured for Stanford University and is 68" long, 97" high and 24" deep.

INTRODUCTION TO KLIEGBOARDS

The desire for controlled lighting is almost as old as the theatre itself . . . from primitive rituals by fireside to the most elaborate productions of today. Blazing pine knots, oil lamps, candles, gas, the limelight, the electric arc and finally the incandescent lamp . . . each new light source brought new methods of lighting control.

The era of the incandescent lamp has demanded the most exacting lighting control. It has run the gauntlet from the bulky resistance and reactance dimming control boards of the 20's to the bench and console type boards of today which use autotransformer, magnetic amplifier or fully electronic dimming systems. In order to answer today's demands for complete circuit selection flexibility between all lighting loads and all dimmers, our firm has developed the Safpatch® and the Rotolector® circuit selector systems for coupling with these new types of boards. Both of these systems are U/L approved, dead front, safe, sturdy, fool proof and easy to operate.

Scene presetting is of course available with the Kliegtronic and magnetic amplifier boards. To further the art of lighting control and to provide even greater flexibility, we developed the Memory Board. This unit provides for the presetting of various loads to various dimmers and permits any dimmer to be used over and over again with different lighting loads.

Not satisfied with just being abreast of the times, we take pride in being the leader in the development of new lighting and control equipment. Our research continues on newer products. Present fields of study include: control devices for zirconium and xenon arc light sources and punch and tape devices for recording an unlimited number of lighting pre-sets.


The following pages list the latest in control equipment. We invite you to review it. At the same time we extend an invitation to use our planning department for whatever assistance you may desire in designing the most compact and versatile control equipment needed to fill your requirements.

KLIEGL ARC SPOTLIGHTS

Kliegl arc spotlights are simple in operation, durably constructed of the finest materials and will give exemplary service in every respect. Arc lamp mechanisms are of the manual-feed type. All adjustments are accomplished simply and directly by means of extension rods and turn handle controls conveniently located outside the lamp housing. All units are fully focusable from flood to spot. They are especially efficient as a follow spot due to their very clean sharp edge, even white light and very narrow beam spread. Units operate on A.C. or D.C.

FEATURES:

- Fully focusable from flood to spot.
- Smooth working, correct burning arc mechanism.
- Properly ventilated hoods to assure proper cooling.
- Peep holes for safe observation of burning arc.
- Large access doors for changing carbons.
- Light tight double wall construction.
- Sturdy cast aluminum and sheet steel construction.

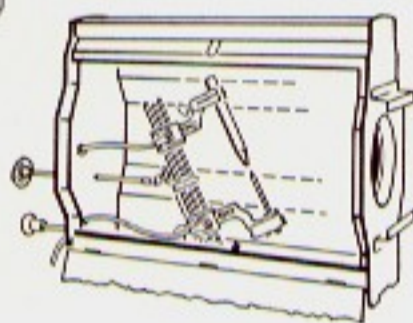


NO. 11

No. 11: — A 70 ampere, 125 volt unit with a recommended throw of 35 to 100 feet. Has a 6" condensing lens, properly mounted to provide for unrestricted expansion. Adjustably mounted on a telescopic floor stand, can be raised or lowered from 37" to 67" above the floor. Comes complete with a base mounted arc ballast for proper arc stabilization and is wired with asbestos leads, 25' cable and switch. Has a 21" hood length. Accessories: No. 566 color frame; No. 22 color wheel; No. 26 color box and No. 257 iris shutter at additional cost.

No. 18 — Same as No. 11 but with a recommended throw of 50 to 120 feet, an 8" condensing lens and a 24" hood length. Accessories: No. 26A color box and No. 258 iris shutter at additional cost.

Arc Lamp Mechanisms

70 AMPERE MECHANISMS — NO. 413B	
CAT. NO.	DESCRIPTION
413B	Arc lamp complete with rear feed
1466	Top carbon holder, complete with mica insulation
1467	Top front carbon holder
1467A	Top front carbon holder clamp
1468	Bottom carbon holder, complete with mica insulation
1469	Bottom front carbon holder
1469A	Bottom front carbon holder clamp
1470	Thumb screws for carbon holder
1471	Focusing bracket mounting

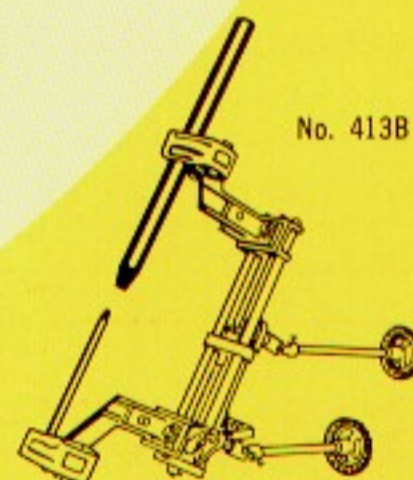

No. 413B

Arc Resistors

Pedestal Type Resistors: designed for mounting on pedestal stand of Kliegl arc spotlights. No. 497 is furnished complete with external hinged terminal box for simplified connections with lighting unit; rated for 125 volts, 35-70 amperes.



No. 497

SPOTLIGHTS (CONT.)

Super-Klieglights

No. 1174

2,000 watt high intensity Super-Klieglights, with a 12" step lens, producing a high intensity beam for a recommended throw of 50-100 feet. These units are very similar in design and construction to the Dyna-Beam Klieglights with the exception that they have a smaller wattage lamp and do not have a spread lens. All controls are rear mounted. Cast aluminum and sheet steel construction.


Using iris and curtain shutters, light beams may be shaped as follows:



- A. Head or follow spot of any size by use of iris shutter.
- B. Large circular flood with both shutters wide open.
- C. Horizontal cut off with curtain shutters partly closed.


Unit has a beam spread of approximately 15 feet at a throw of 75 feet. The approximate average footcandle value, using a 2M/T30/1 watt lamp, at a throw of 75 feet is 55 foot candles.

Units equipped with slide grooves for color frame (No. 1039 color frame) or No. 17 color wheel, telescopic roller caster stand, pin plug connectors, 25 feet cable, 30 ampere toggle type line switch. A.C. blower motor normally furnished, D.C. blower motors optional at slight additional cost.

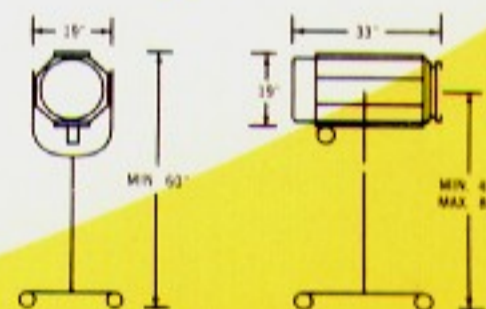


NO. 1174 NET WGT. 94 Lbs.

CAT. NO.	WATTS	LENS	RECOMMENDED THROW	RECOMMENDED LAMP
1174	2000	12"	50'-100'	2M/T30/1
1175	2000	12"	50'-100'	2M/T30/1

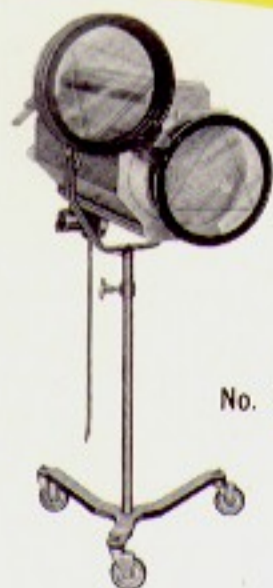

No. 1175 Super-Klieglight with color boomerang. Unit contains four circular color frames for Cinemoid with individual rear controls mounted on standard No. 1174 Super-Klieglight.

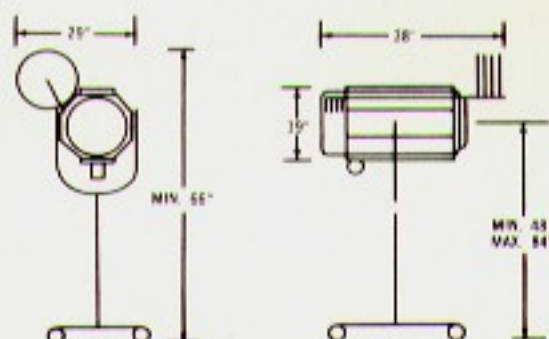

NO. 1175 NET WGT. 100 Lbs.

GROUNDING EQUIPMENT

All listed units can be supplied with 2 wires plus ground and may be specified by addition of suffix "G" to unit catalog number.

MOUNTING DATA

All listed units may be furnished with heavy duty pipe clamp mounting, instead of roller caster stand, for overhead pipe mounting.

KLIEGL BOOTH

Dyna-Beam Klieglights


No. 1178

A 3000 watt high intensity unit, with a 12" step lens and a 9" spread lens, intended for long range throw or for high intensity work at shorter ranges. This unit has a recommended throw of up to 200 feet.

All units complete with properly weighted adjustable telescopic roller caster stand, 30 ampere toggle type line switch, recessed in housing, and 25 feet of cable, unless otherwise specified. All units provided with front slide grooves for No. 1039 color frame or No. 17 color wheel. Unless otherwise specified unit is furnished with 30° horizontal divergence spread lens. A.C. blower motors normally furnished, D.C. blower motors optional at slight additional cost.



No. 1178

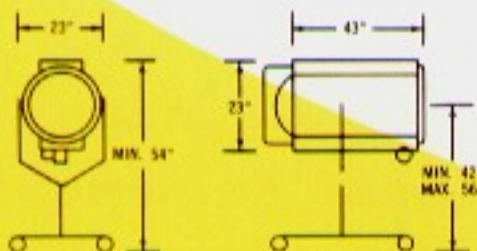


NO. 1178 NET WT. 172 lbs.



Unit has a beam spread of approximately 20 feet at a throw of 100 feet. The approximate average footcandle value, using a 3M/T32/2 watt lamp at a throw of 100 feet is 49 foot candles and at a throw of 200 feet is 12 footcandles.

CAT. NO.	WATTS	LENS	RECOMMENDED THROW	RECOMMENDED LAMP
1178	3000	12"	100'-200'	3M/T32/2
1179	3000	12"	100'-200'	3M/T32/2

No. 1179 — Dyna-beam with permanently attached fast acting color boom-rang containing 5 regular color frames in vertical gangways operated by individual rear levers. Unit contains standard No. 1178 Klieglight and No. 26DD Color Box.

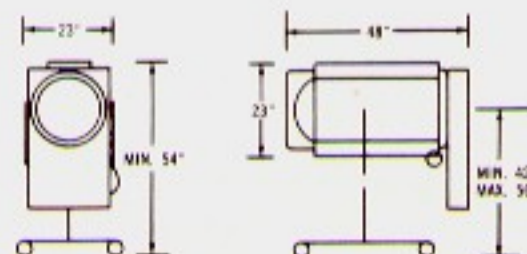

NO. 1179 NET WT. 156 lbs.



No. 1179

GROUNDING EQUIPMENT

All listed units can be supplied with 2 wires plus ground and may be specified by addition of suffix "G" to unit catalog number.

MOUNTING DATA


All listed units may be furnished with heavy duty pipe clamp mounting, instead of roller caster stand, for overhead pipe mounting.

SPOTLIGHTS


No. 1376—Model 300

A 3000 watt very high intensity unit, with a $14\frac{3}{4}$ " step lens and a 9" spread lens, intended for very long range throw or for extra high intensity work at shorter ranges. This unit has a recommended throw of up to 300 feet. Units of this type are being used at Marine Stadium, Jones Beach, N. Y. where the throw from the spotlight gallery to the center of the stage is 315 ft.

All units complete with properly weighted adjustable telescopic roller caster stand, 30 ampere toggle type line switch, recessed in housing, and 25 feet of cable, unless otherwise specified. All units provided with front slide grooves for No. 581 color frame or No. 17 color wheel. Unless otherwise specified unit is furnished with 30° horizontal divergence spread lens. A.C. blower motors normally furnished, D.C. blower motors optional at slight additional cost.

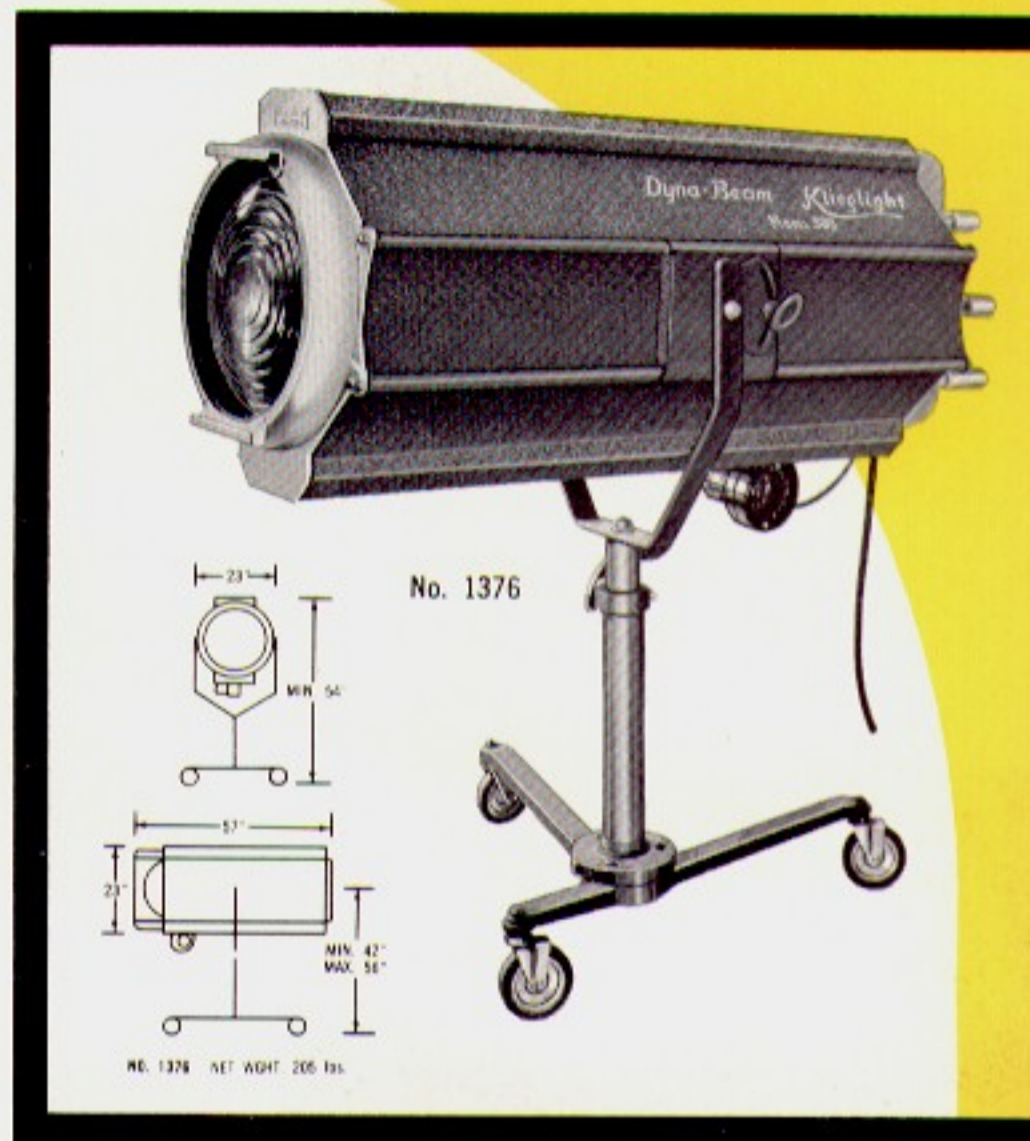

Unit has a beam spread of approximately 35 feet at a throw of 250 feet. The approximate average footcandle value, using a 3M/T32/2 watt lamp, at a throw of 150 feet is 46 footcandles and at a throw of 300 feet is 12 footcandles.

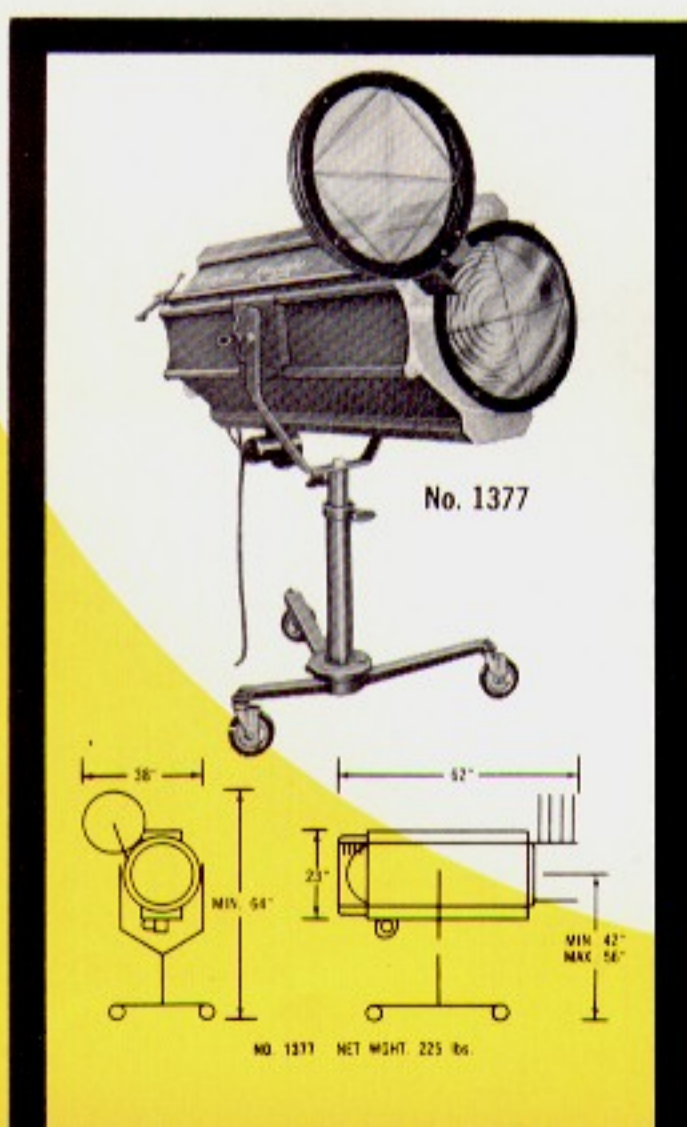

No. 1377. Dyna-Beam with color boomerang. Unit contains four circular color frames for Cinemoid or gelatine with individual rear controls mounted on standard No. 1376 Model 300 Dyna-Beam Klieglight.

GROUNDING EQUIPMENT

All listed units can be supplied with 2 wires plus ground and may be specified by addition of suffix "G" to unit catalog number.

MOUNTING DATA


All listed units may be furnished with heavy duty pipe clamp mounting, instead of roller caster stand, for overhead pipe mounting.

CAT. NO.	WATTS	LENS	RECOMMENDED THROW	RECOMMENDED LAMP
1376	3000	$14\frac{3}{4}$ "	150'-300'	3M/T32/2
1377	3000	$14\frac{3}{4}$ "	150'-300'	3M/T32/2

KLIEGL BOOTH

Dyna-Beam Klieglights

3000 watt high intensity Dyna-Beam Klieglights, for long range throws, produce an exceptionally powerful beam of light. Cast aluminum and sheet steel are combined to produce a very rugged unit with lowest allowable weight. Perfectly balanced in swivel yoke. Quickly locked or unlocked and easily swung into any desired position. All control levers are located at rear of housing assuring rapid, easy operation. Housing top removable to provide ready access to interior. Iris and curtain shutters of special heat resisting metal—eliminates heat erosion. Quiet blower system to assure proper lamp life. Spread lens increases beam width without affecting beam height. Projected beams have approximate uniform intensity of light over entire illuminated area. Shuttering light provides little change in intensity of remaining lighted area.

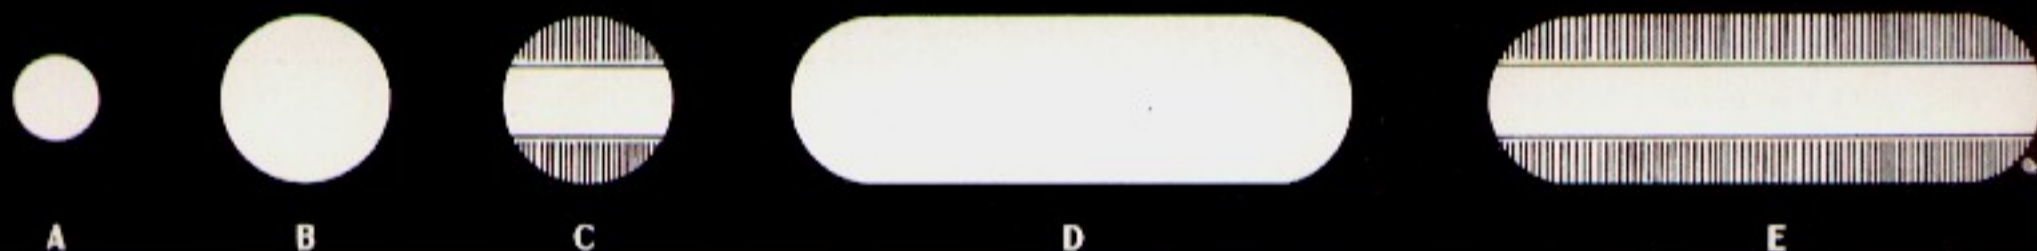

Using iris and curtain shutters, light beams may be shaped as follows:


- A. Head or follow spot of any size by use of iris shutter.
- B. Large circular flood with both shutters wide open.
- C. Horizontal cut-off with curtain shutters partly closed.
- D. Elongated flood with spread lens in position and both shutters open.
- E. Elongated flood with curtain shutter cut-off as used to floodlight a chorus or large stage.

FEATURES:

- 1. Uniform illumination at maximum efficiency with factory set lamp holder.
- 2. Convenient rear controls.
- 3. Well ventilated, light tight construction coupled with quiet blower system assures proper lamp life.
- 4. Hinged cap and detachable lamp holder permit relamping with least effort and time loss.
- 5. 9" horizontal divergence spread lens and Step lens with black ceramic risers.
- 6. Ellipsoidal spun aluminum Alzak finished reflector.
- 7. $2\frac{1}{2}$ to $3\frac{1}{2}$ times the lumen output of conventional spots of equal wattage.
- 8. Minimum physical dimensions. Fits projection booths.
- 9. Well defined cut-off of light.



Hinged cap and detachable lamp holder permit fast, easy relamping.

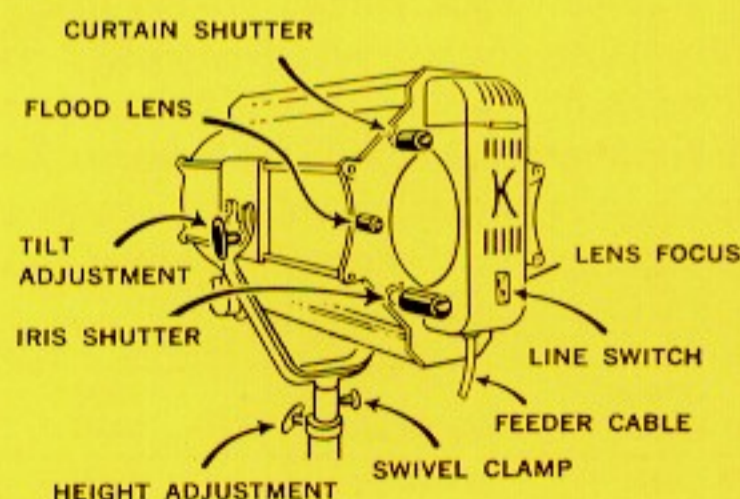

Conveniently located rear and side operating controls assures rapid adjustment and operating ease.

KLIEGL PROSCENIUM LIGHTS

Strip Lights



No. 599

Kliegl proscenium strip lights produce a directed flood of light for the illumination of the first entrance acting area. They are of sheet steel construction with a sheet steel face which fully encloses all of the individual spun aluminum semi-matte Alzak finished reflectors into light tight compartments which guarantees purity of color as well as increased strength and rigidity. Naturally colored glass roundels are held in hinged holders; assuring safe, easy relamping.

No. 599 — Individual reflector type; uses 60/100 watt A21 medium screw base lamps. Receptacles alternately wired on three or more 2-wire circuits for independent color control. Uses 3¾" roundels.

No. 598 — Same as No. 599 but uses 150 watt lamps and 5½" roundels.

No. 597 — Same as No. 599 but uses 200 watt lamps and 7⅞" roundels.

CATALOG NUMBER	DESCRIPTION	OUTLETS		NET WEIGHT LBS./FOOT
		WATTS	CENTERS	
599	INDIVIDUAL REFLECTOR TYPE — HINGED RING HOLDERS AND ROUNDELS	60/100	4"	5
598		150	6"	6
597		200	8"	9

Tormentor Lights



Kliegl tormentor spotlights are a grouping of standard Kliegl incandescent units, mounted on a vertical support on each side of the proscenium arch or in front entrances. Selection of the proper units depends upon the size of the stage, nature of presentation as well as individual preferences and requirements. Normally, 250 to 500 watt spotlights are used on a small stage; 1000 watt units for a stage with an opening of approx. 30 feet; 1000 to 2000 watts or higher for large stages. Any type and arrangement of spotlights may be had. For information regarding various Kliegl Spotlights, refer to pages 6 through 21.

STRIP FLOODLIGHTS

Kliegl stage striplights give a widely distributed flood of light at close range. Used at stage entrances, back of transparencies, behind ground rows, etc. Also ideal for such non-theatrical purposes as show rooms, advertising displays and wherever a portable light strip of this kind is required for temporary service. Consists of an open trough reflector and wireway with a series of medium screw base receptacles for standard general service incandescent lamps, wired on one—2 wire circuit terminating in a suitable splice box with a bushed opening for cable extension. Constructed of galvanized sheet steel with reflecting surfaces painted permanent white and external surfaces a chip resistant black. Swing hook on one end is provided for hanging.

CATALOG NUMBER	DESCRIPTION	LAMP WATTS	LENGTH* FEET	NET WEIGHT LBS./STRIP
649	2-LIGHT STRIP	40/150	1½	4
650	4-LIGHT STRIP	40/150	3	8
651	6-LIGHT STRIP	40/150	5	14
652	10-LIGHT STRIP	40/150	8	20



NO. 650

*Longer lengths and strips with more than one circuit are made to order.

Note: For 3-color strips, see portable footlights which are also adaptable for striplighting purposes.


KLIEGL No. 619 BATTEN PLUGGING STRIPS

Provides safe and convenient facilities for connecting spotlights, floodlights etc., where units are hung from an overhead pipe batten. Consists of a continuous 2" x 4", 20 gauge steel wireway equipped with clamps for proper suspension and for mounting of 1 1/4" pipe batten (approx. 4" below wireway). Available with either pigtails (female connectors on 18" leads), flush mounted plug receptacles or a combination of both in 20, 30 or 50 ampere capacity, either grounded or ungrounded. Excellent for providing tormentor spot outlets. The front cover is removable for access to terminals. Standard finish is flat black. Circuit designations, stenciled on front, in 2" letters, available if desired. Batten plugging strips are manufactured to meet individual job specifications. All prices on application.

ORDERING INFORMATION

When ordering Batten Plugging Strips, please include the following information:

1. Length of strip required.
2. Number of circuits.
3. Number of flush receptacles.
4. Number of pigtail connectors and length of pigtails.
5. Desired amperage of outlets.
6. Are connectors to be grounded or ungrounded?
7. Proper end for location of terminal box — either right or left when facing auditorium.
8. Desired individual circuit designations.

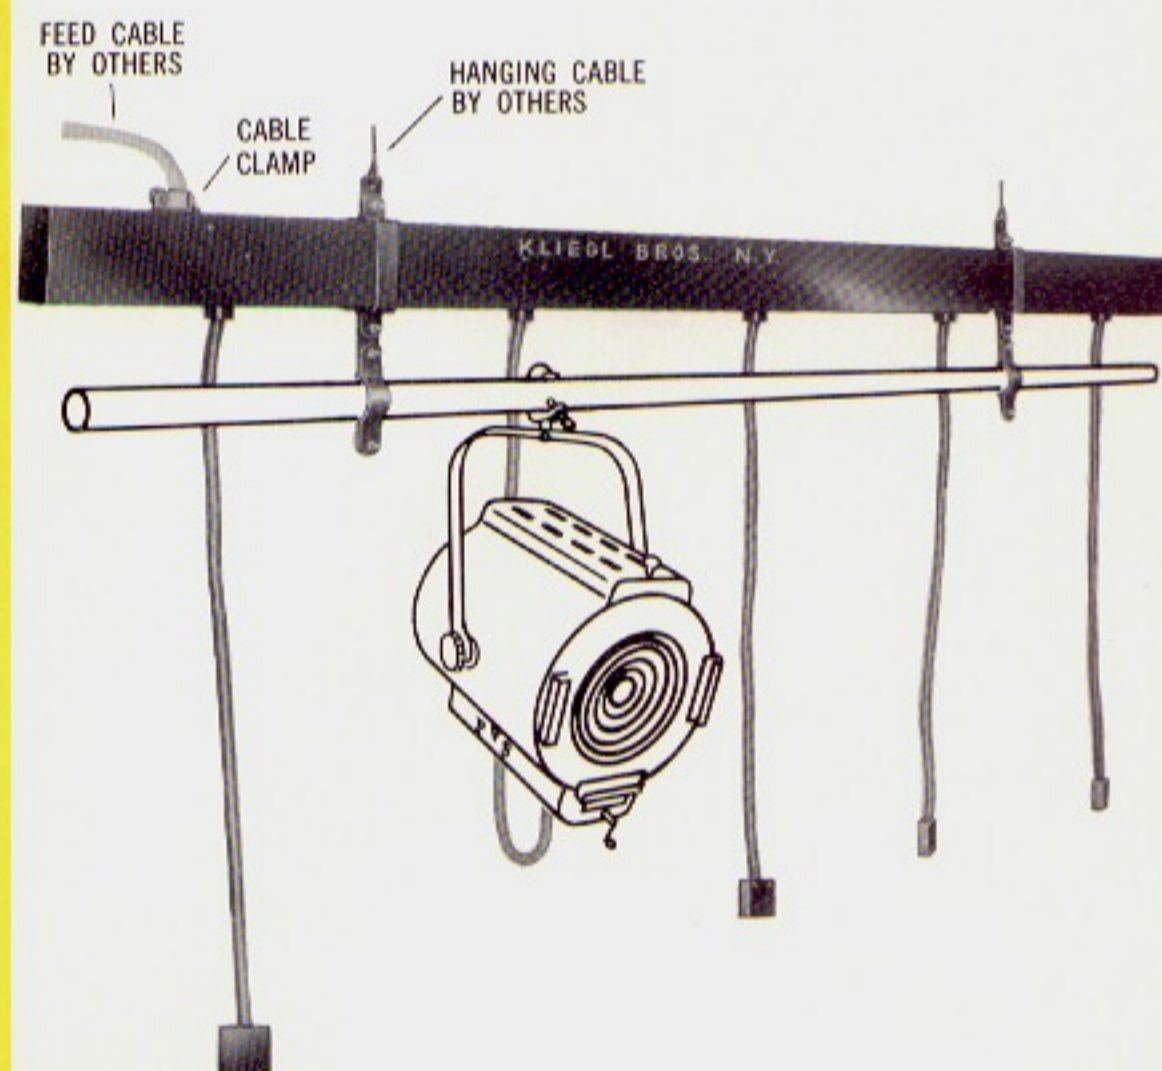

CYCLORAMA LIGHTS

Cyclorama footlights and cyclorama borderlights with colored glass roundels or individual color frames, single or double row, from 200 to 500 watts in size are manufactured to meet individual job requirements. This equipment, when properly installed, produces the finest cyclorama lighting possible. Both the Radio City Music Hall and the Metropolitan Opera House are so equipped. Prices and specifications sent upon request.



7"

No.
610




7½"

No.
610 C



7½"

No.
590 C
SHOWN WITH
GLASS ROUNDELS




7½"

No.
5906 CP



7½"

No.
610 CP
SHOWN WITH
GLASS ROUNDELS

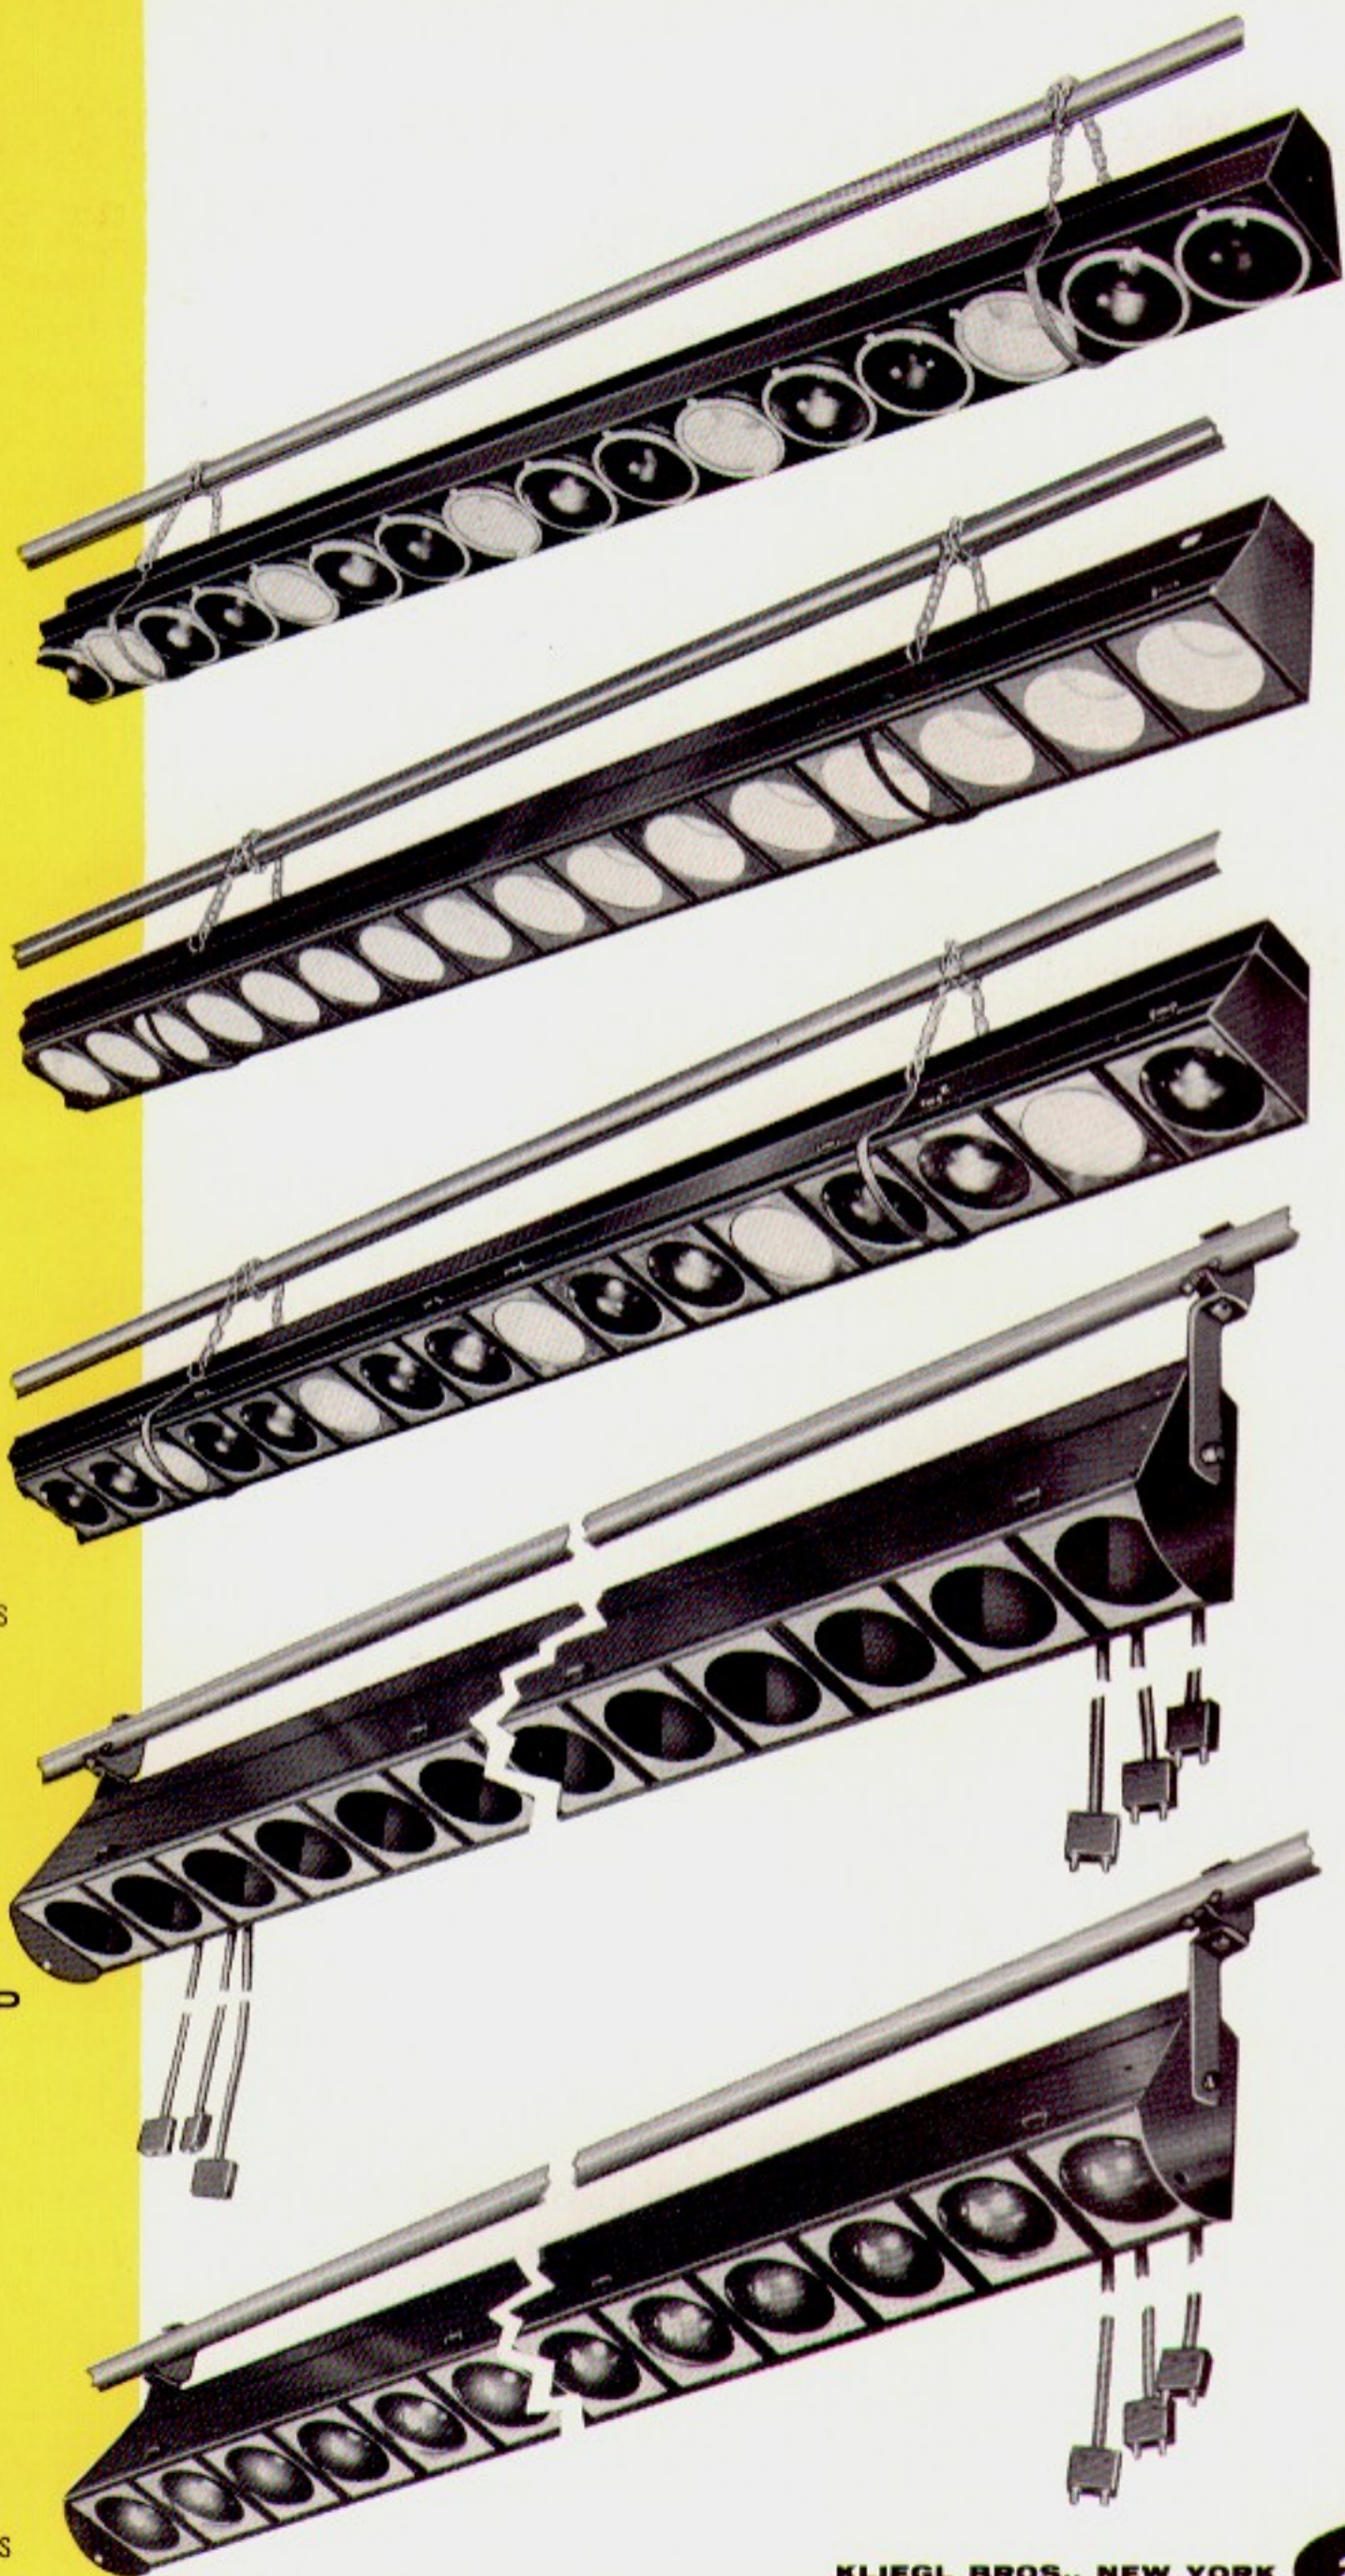

KLIEGL BORDERLIGHTS

Suspended above stage from pipe batten, they are designed to provide maximum light output with proper light distribution. Sturdily constructed, well ventilated and light-tight, provided with chain hangers and scenery guards. Circuits extend to splice box for making feeder connections. Spotlight pigtail connector outlets can also be furnished, spaced as desired.

When ordering, specify: type, length, wattage of lamps, number of colors, number of circuits per color and location of splice box (right or left end when standing on stage and facing audience). Comply with all Underwriters' requirements.



ROUNDEL TYPE

Housing is constructed with a sheet metal front which fully encloses all reflectors in a light-tight compartment and at the same time gives greatly increased strength and rigidity.

Each lamp receptacle has an individual spun aluminum Alzak finished reflector and colored glass roundel clipped into place in its own hinged holder. At no time during relamping need the roundel be removed from its holder.

Relamping is done by simply opening the hinged holder and replacing the lamp.

COLOR FRAME TYPE

Housing is constructed with a sheet metal front which fully encloses all reflectors in a light-tight compartment and at the same time gives greatly increased strength and rigidity. Furnished with individual removable color frames which are equally adaptable for holding Cinemoid, gelatine or glass roundels. (Color mediums are not included in price unless specifically specified.) Slide holders are provided with self-closing light shields to prevent spill light.

Designs for "A" type lamps have individual spun aluminum Alzak finished reflectors for each lamp receptacle. In reflector lamp "R" designs, each lamp is in a separate light-tight compartment. Both of the above methods of light-tight construction assure absolute purity of color values.

ROUNDEL TYPE PERMANENT BORDERLIGHTS					
No.	Watts	Centers	Roundels	Width in Position	Shipping Weight Pounds per Foot
610	100	6"	5 $\frac{3}{8}$ "	7"	11
610A	150	6"	5 $\frac{3}{8}$ "	7"	11
602	200/300	8"	7 $\frac{1}{4}$ "	9"	15
603	300/500	12"	11 $\frac{1}{4}$ "	13"	20
COLOR FRAME TYPE PERMANENT BORDERLIGHTS					
No.	Lamp	Watts	Centers	Width in Position	Shipping Weight Pounds per Foot
610C	A	100	6 $\frac{3}{8}$ "	7 $\frac{1}{2}$ "	11
610AC	A	150	6 $\frac{3}{8}$ "	7 $\frac{1}{2}$ "	11
602C	A	200	8"	10"	15
590C	R*	150	6"	7 $\frac{1}{2}$ "	11

*Reflector Lamp

PORTABLE SHORT SECTION BORDERLIGHTS

Correspond in general construction to color frame type permanent borderlight of similar design. Made in standard eight foot lengths. Receptacles wired alternately on three two-wire circuits. Furnished with short cable extensions and pin-plug connectors on one end unless otherwise specified. Adjustable end brackets with pipe clamps are supplied for suspension of strip from pipe battens. Furnished with color frames which are adaptable for holding Cinemoid, gelatine or glass roundels. (Desired color mediums are furnished at additional cost.) Available in the following designs:

PORTABLE SHORT SECTION BORDERLIGHTS						
No.	Lamp	Watts	No. of Outlets	Length	Width in Position	Shipping Weight Pounds
610CP	A	100	15	8'0"	7 $\frac{1}{2}$ "	88
610ACP	A	150	15	8'0"	7 $\frac{1}{2}$ "	88
602CP	A	200	12	8'0"	10"	120
590CP	R*	150	15	8'0"	7 $\frac{1}{2}$ "	88
610GCP	— Same as 610CP but with pigtails on both ends.					
610GACP	— Same as 610ACP but with pigtails on both ends.					
590GCP	— Same as 590CP but with pigtails on both ends.					

*Reflector Lamp

ROUNDEL TYPES

Housing is constructed with a sheet metal front which fully encloses all reflectors in a light-tight compartment and at the same time gives greatly increased strength and rigidity.

Each lamp receptacle has an individual spun aluminum Alzak finished reflector and colored glass roundel clipped into place in its own hinged holder. At no time during relamping need the roundel be removed from its holder. Relamping is done by simply opening the hinged holder and replacing the lamp.

Units are made in single or double row design.

Usually supplied with semi-matte finished reflectors and non-diffusing roundels. Also furnished with polished reflectors and diffusing roundels if desired. Roundels are generally supplied in clear, red and blue. Other colors are also available.

Made in several sizes for lamps of different wattages as listed:

ROUNDEL TYPE PERMANENT FOOTLIGHTS					
	CAT. NO.	WATTS	CENTERS	GLASS ROUNDELS	SHIPPING WGHT. LBS./FT.
SINGLE ROW DESIGN	620	75/100	4"	3 $\frac{3}{4}$ "	15
	620A	100	6"	5 $\frac{5}{8}$ "	15
	620B	150	6"	5 $\frac{5}{8}$ "	15
DOUBLE ROW DESIGN	621	75/100	4 $\frac{1}{2}$ "	3 $\frac{3}{4}$ "	30
	621A	100	6"	5 $\frac{5}{8}$ "	30
	621B	150	6 $\frac{3}{4}$ "	5 $\frac{5}{8}$ "	30

COLOR FRAME TYPE

Housing is constructed with a sheet metal front which fully encloses all reflectors in a light-tight compartment, assuring absolute purity of color, and at the same time gives greatly increased strength and rigidity. Individual, removable color frames, equally adaptable for Cinemoid, gelatine or glass roundels are provided. (Color mediums are not included in price unless specifically specified.) Slide holders are provided with self-closing light shields to prevent spill light.

Designed for "A" type lamps with individual spun aluminum Alzak finished reflectors for each lamp receptacle.

Available in two sizes for different wattage lamps, as listed:

COLOR FRAME TYPE PERMANENT FOOTLIGHTS				
CAT. NO.	WATTS	CENTERS	GLASS ROUNDELS	SHIPPING WGHT. LBS./FT.
620C	100	4 $\frac{5}{8}$ "	3 $\frac{3}{4}$ "	15
620BC	150	6"	5 $\frac{5}{8}$ "	15

PORTABLE SECTIONS


Serviceable when and where footlights are temporarily required and no permanent equipment is available. Simply set in position on the stage or platform. No recess in the floor is necessary. Height is minimized to make them unobtrusive. Designed to project the light properly.

Furnished in standard eight-foot lengths. Several sections may be coupled together electrically and fed from one end. Wired for three colors, with pigtail cable extensions and pin-plug connectors on both ends. Each lamp receptacle is provided with a spun aluminum Alzak finished reflector and slide grooves for removable color frames which are adaptable for Cinemoid, gelatine or glass roundel color mediums. Normally supplied with color frames only. (Desired color mediums are furnished at additional cost.)

Available in different wattage sizes as listed:

PORTABLE SECTIONS					
CAT. NO.	WATTS	CENTERS	LENGTH	GLASS ROUNDELS	SHIPPING WGHT. LBS./FT.
620CP	100	6"	8' 0"	5 $\frac{5}{8}$ "	11
620BCP	150	6"	8' 0"	5 $\frac{5}{8}$ "	11
629	60/100	3"	8' 0"	*	7


* Open trough type using natural colored lamps

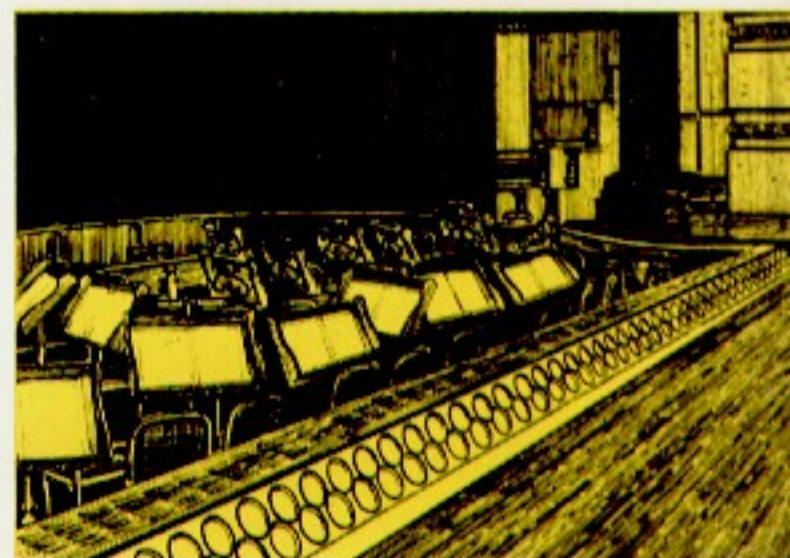


KLIEGL PERMANENT FOOTLIGHTS

Fixed in position and generally preferred where stage is regularly used for musical or dramatic productions. Semi-flush in structure, they protrude but a few inches above the stage floor. Furnished straight or curved in any length desired.


Wired alternately for independent control of any number of colors, usually three or four with splice box on either end as specified. Can also be supplied with built-in plug outlets for auxiliary lighting. When ordering, specify type, length, straight or curved (radius of curve) wattage of lamps, number of colors and location of splice box (right or left end when standing on stage facing audience).

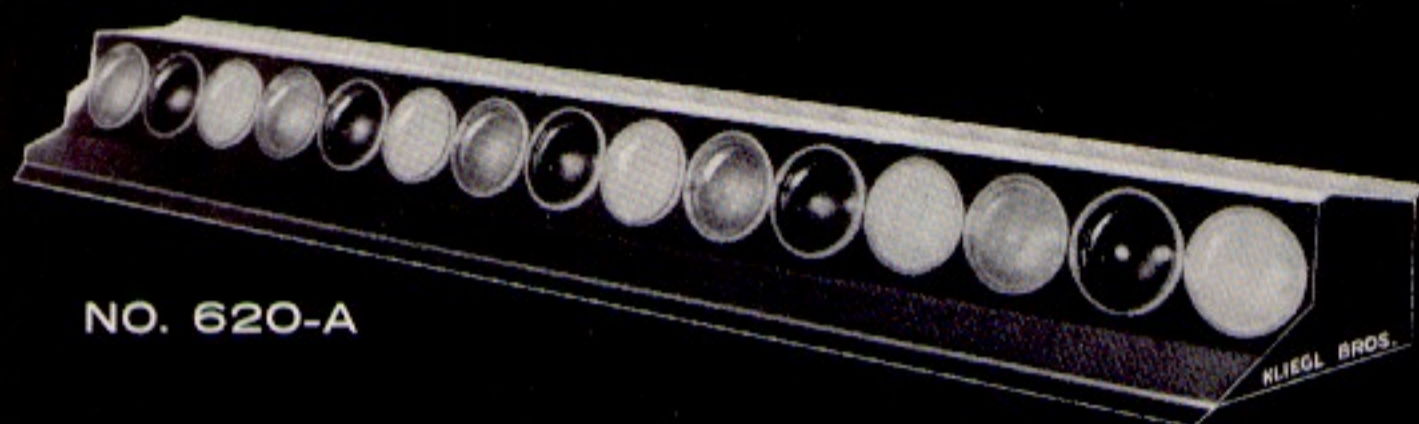

NO. 620-A

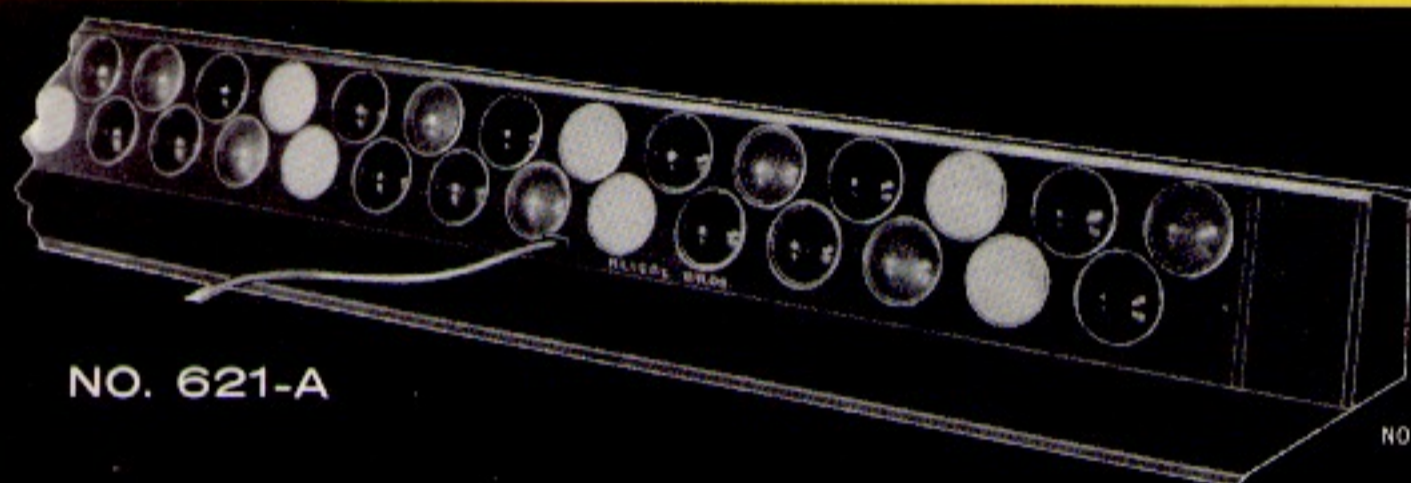


NO. 621-A

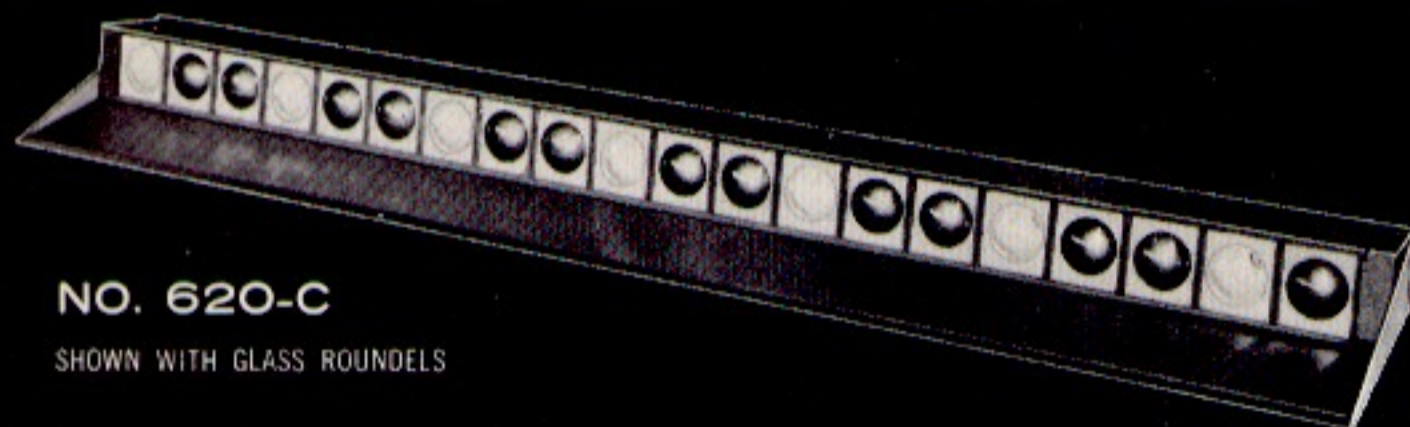

NO. 620-C


SHOWN WITH GLASS ROUNDELS

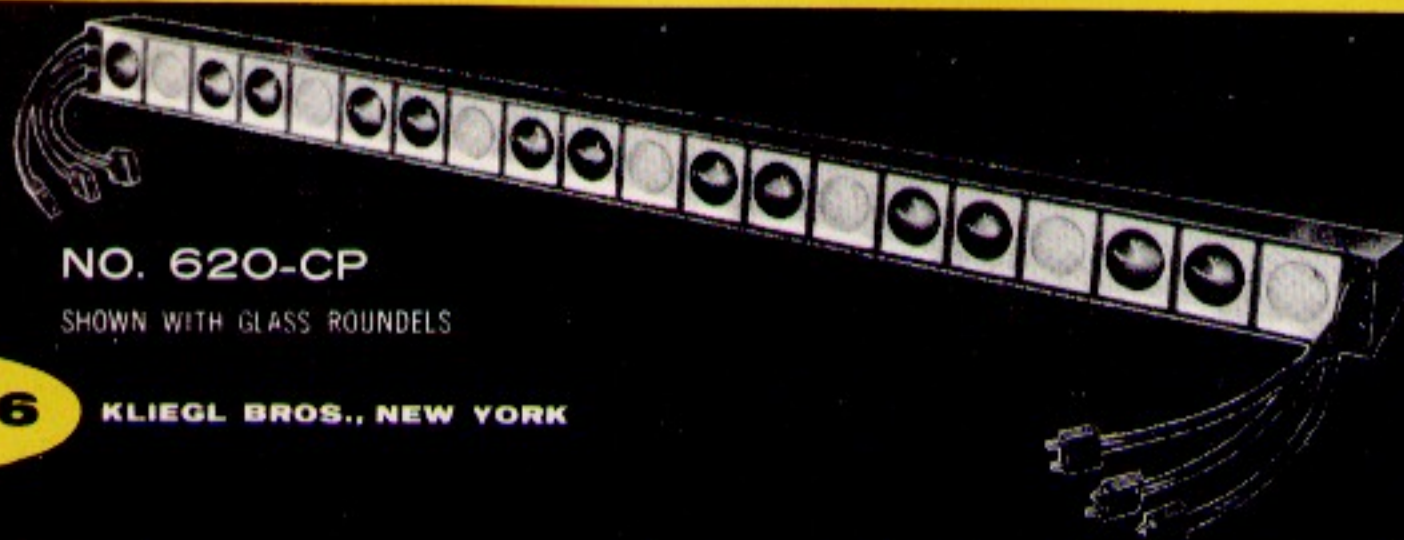



NO. 620-CP

SHOWN WITH GLASS ROUNDELS




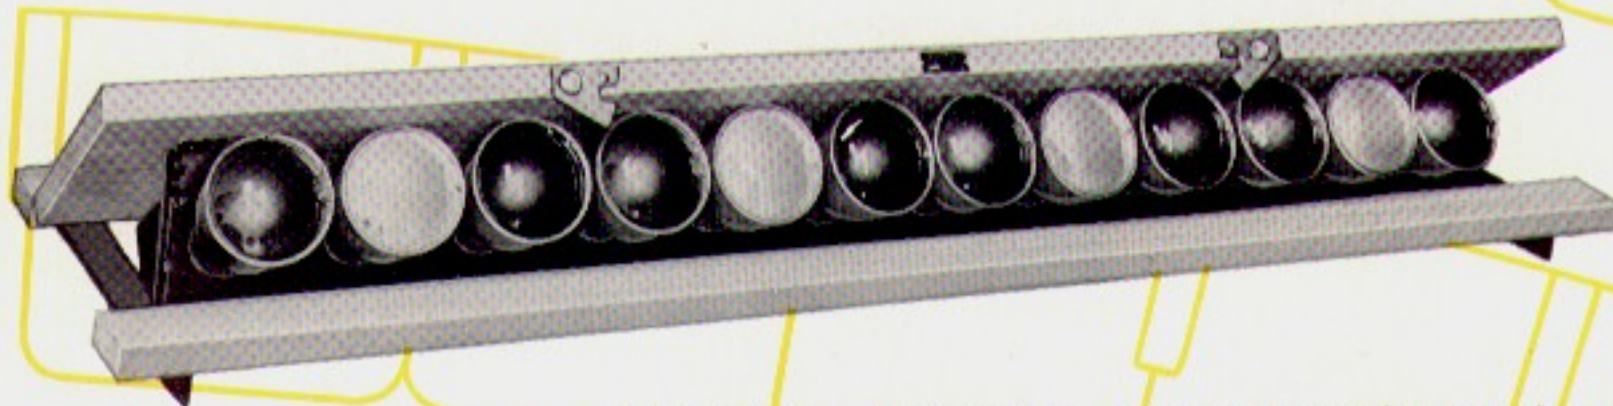

No. 832 Single row reflector-type disappearing footlights; five-foot sections with 12 receptacles for 100 watt A lamps. Equipped with individual Alzak aluminum reflectors and 4" glass roundels. Wired for three colors and supplied with blue, red and clear color roundels. Oak flooring with floor panel hinged to back strip with swinging bracket for tilt adjustment. Provided with splice box, terminal block and automatic cut-off mercury switches. Shipping weight—60 pounds per section.

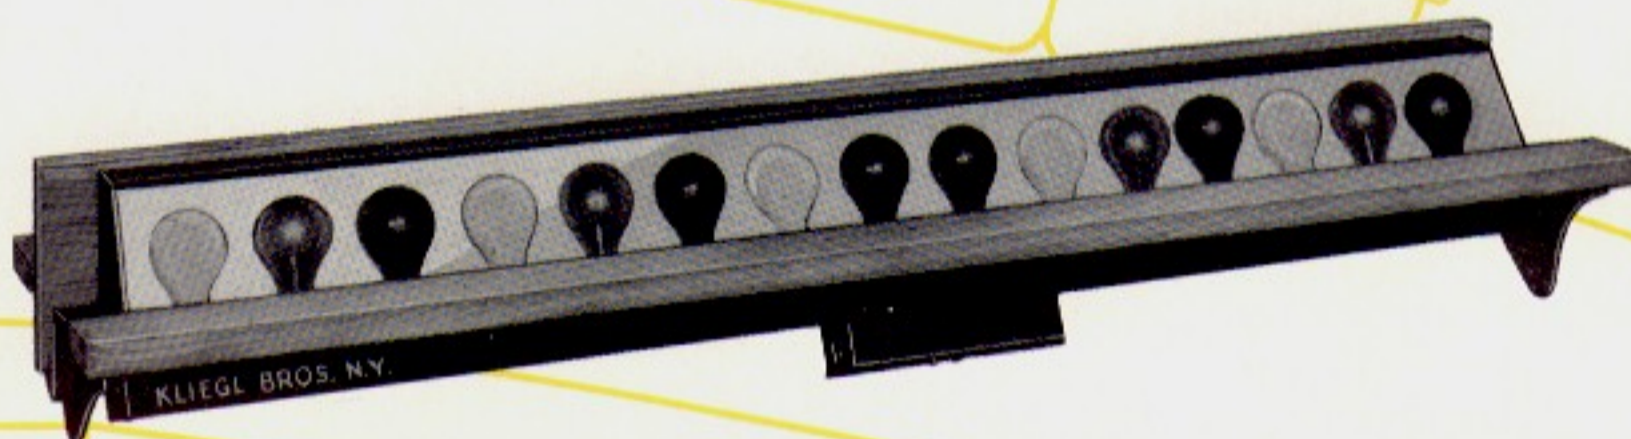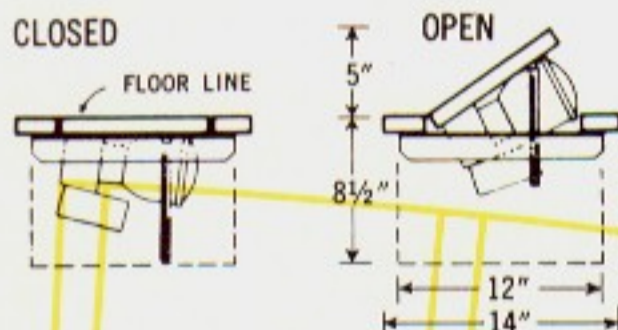


No. 829 Single row open-trough type disappearing footlight for colored lamps; five-foot section with 15 receptacles for 60/100 watt lamps. Reflecting surfaces spray painted permanent white. Oak flooring. Wired for three colors. Provided with splice box, terminal block and automatic cut-off mercury switches. Shipping weight — 60 pounds per section.

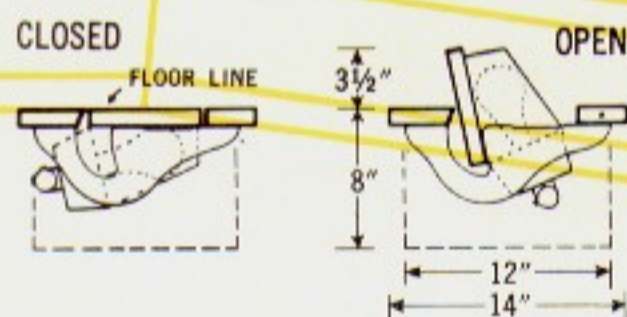

OPEN



CLOSED

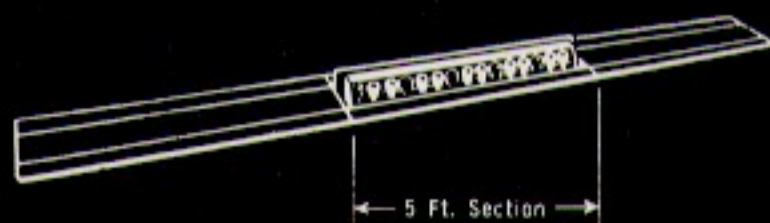

5 Ft. Section



8° MAX.

PLAN — STRAIGHT INSTALLATION

STANDARD SECTION
5 Ft.



PLAN — CURVED INSTALLATION



FOR CURVED INSTALLATION ENDS MAY BE MITERED TO FIT THE CURVATURE. STANDARD CONSTRUCTION PERMITS MITERING UP TO 8 DEGREES.

Other types and models available.
Maple flooring at additional cost.

Kliegl Bros. disappearing footlights are very serviceable for installations where footlights are only occasionally required as in school auditoriums, recreational buildings, assembly rooms, gymnasiums, concert halls, hotel ballrooms, community centers and the like. They perform their function equally as well as permanent footlights of similar types. When not in use, footlights may be closed flush with the stage floor, leaving an unobstructed platform for speakers and other purposes.

DISAPPEARING FOOTLIGHTS

Made in standard five-foot unit lengths, compact, highly efficient, completely assembled with lamp receptacles wired alternately on three two-wire circuits for independent control of each color. Furnished with clear, red and blue roundels—other colors available. Lighting element is attached to underside of floor panel and is provided with terminal block in pull box for circuit connections. Each section equipped with automatic disconnecting switches which eliminates possibility of leaving lamps lighted when section is closed.


Flooring of sturdy hard wood (oak) construction, stripped, cross grained and impregnated to prevent warping and to withstand wear. Simple positive latch holds footlights closed when not in use.

When raised, row of adjoining sections presents an unbroken front to the audience.

Furnished in straight sections with sufficient allowance to permit mitering of ends for curved installations.

Units may be had with motor drive attached to each section for opening and closing footlights from switchboard or other locations.

Comply fully with Underwriters' requirements.

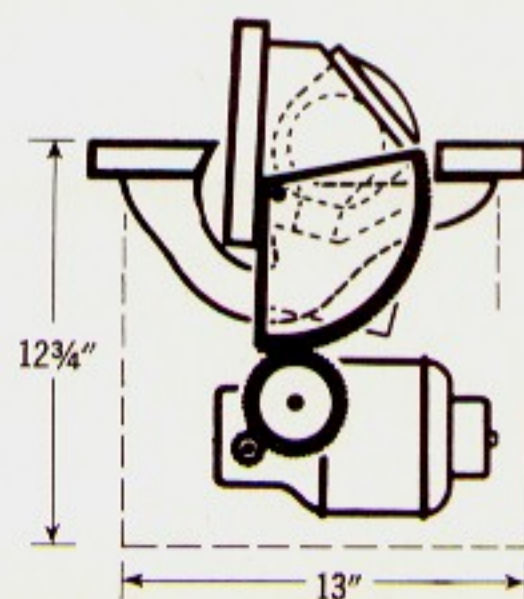

FLOODLIGHTS


Kliegl suspension type floodlights are ideal for added localized high lighting or effect lighting of acting areas. Units flood a wide area with even uniform illumination. All units are equipped with color frame holders and semi-matte Alzak finished aluminum reflectors.

No. 546 — May be mounted in any direction. Furnished with a pipe clamp and asbestos leads. Uses a 500 watt PS 40 lamp. Reflector is parabolic type.

No. 547 — Same as No. 546 but for a 1000 watt PS 52 lamp.

No. 548 — Uses a compound double-curvature inbuilt spun aluminum, semi-matte Alzak finished reflector. Uses a 200 watt PS 30 lamp. Furnished with suspension chains and asbestos leads.

No. 548A — Same as No. 548 but for a 500 watt PS 40 lamp.

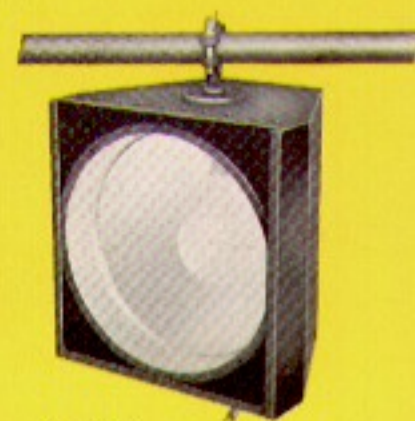


No. 546




No. 548

OLIVETTES — Kliegl standing floodlights are ideal for lighting stage entrances, broad surfaces or acting areas from side wings or other comparatively close range locations. They cover a wide area with even, uniform illumination. All units are furnished with a heavy base floor stand, asbestos leads, pin-plug connector and 25 ft. flexible cable.

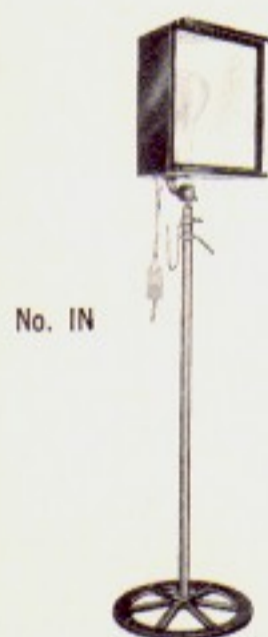

No. IN

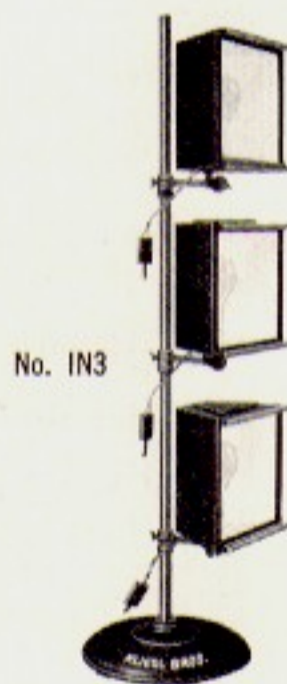

No. IN3



No. 2N

No. IN — Open box pedestal type with heat resisting white interior reflecting surfaces. Accommodates a 500 watt PS 40 lamp or a 1000/1500 watt PS 52 lamp.

No. IN3 — Three independently wired No. IN units ganged, one above the other, on a heavy base floor stand.

No. 2N — Parabolic stage floodlight. Similar to IN except equipped with an inbuilt spun aluminum semi-matte Alzak finished reflector. Uses 1000/1500 watt PS 52 lamp.

COLOR FRAMES

COLOR FRAME CAT. NO.	1037	1038	580	580G	585 or 588
FLOODLIGHT CAT. NO.	546	547	548	548A	IN — 2N — IN3

GROUNDING EQUIPMENT

Units can be supplied with two wires plus ground. To specify, add suffix "G" to catalog number.

KLIEGL STAGE



No. 1155—18" Scoop; uses 750/2000 watt PS 52 lamp.



No. 1122—15" Scoop; uses 300 watt PS 35 lamp or 500 watt PS 40 inside frosted lamp.



No. 1143—15" Kliegsun; uses a 1000/1500 watt G40 or a 2000 watt G48 mogul screw base lamp.



No. 1158—Long range scoop uses a 750/1000 watt T24 med.bi-post base-up burning 1M hour frosted lamp.

No. 1155 and No. 1122 are high candlepower scoop type floodlights. The scientifically designed reflector assures extremely efficient operation; produces exceptionally smooth, even illumination of high intensity. Matte Alzak finished reflector assures permanent trouble free reflector life. May be directed from floor to any desired position, straight up or straight down. Unit is perfectly balanced and spring tension holds any adjustment until purposefully readjusted. Ideal for highlighting and to augment base lights.

No. 1143 produces a brilliant shaft of light. Additional front spherical reflector redirects forward light rays from lamp bulb into Alzak finished parabolic aluminum reflector, greatly increasing beam candlepower and eliminating spill light. Universal yoke mounting permits angling in any direction. Screw feed focusing adjustment guarantees that the lamp stays put at desired focal point.

No. 1158 is a long range high candlepower scoop type floodlight. Has a spindle type beam spread adjustment. Combination polished and matte Alzak finished aluminum reflector. Smooth, uniform, high intensity illumination. When used from short ranges, it gives an added punch of light. Directionable 45° up and 45° down on vertical axis.

Accessories for	1155	1122	1158	1143
Color frame	1078	1078C	1078B	1078C
Barn Doors—2 Way	1091	1084	1092	1084
Barn Doors—4 Way	1091A	1084A	1092A	1084A
Roller Caster Stands (for Above Units)				
19" Base— Adjustable Height 3' to 5'				1420
25" Base— Adjustable Height 3' to 5'				1421

Grounded Equipment— Units can be supplied with 2 wires plus ground. To specify, add suffix "G" to catalog number.

All listed units are furnished with pipe clamp and asbestos leads unless otherwise specified.

UTILITY FLOODLIGHTS

CATALOG NUMBER	LAMP			DIA.	COLOR FRAME
	WATTS	BULB	BASE		
533	250/400	G-30	MED. SC.	11"	580
537	500/1000	G-40	MOG. SC.	14½"	581

To specify desired mounting, add appropriate suffix to catalog number: Wall Bracket— "A"; Table Base— "B"; Pipe Clamp—"E". If grounded equipment is desired, add suffix "G" to catalog number.

No. 533 and No. 537

Utility floodlights have a general usage on a stage for localized lighting of the acting area. They are also serviceable for a wide variety of other lighting applications. They consist of a parabolically spun aluminum Alzak finished semi-matte reflector. The standard lamp receptacle is in a fixed focal position, wired with a pair of asbestos leads, provided with slide grooves for color frames. Supplied with wall bracket, table base or pipe clamp as required.



NO. 533A



NO. 533B

SPOTLIGHTS

N SERIES

2000 watt long range units; cast aluminum and sheet steel housings with double wall construction. Designed primarily as floor stand models, all units provided with directional grip handles and rear focusing control. Contain spun aluminum Alzak finished reflectors. Special ventilation system assures proper lamp life. Light-tight construction; hinged access door provides easy relamping.

6N19

A long range unit having a 6" lens for a recommended throw of 50-75' with a beam spread of 9' in the spot position and 54' in the flood position at a throw of 60'. Unit furnished with a heavy base telescopic floor stand, pin-plug connectors and 25' cable unless specified otherwise. Accessories: No. 22 hand color wheel, No. 31AC motor color wheel and No. 257 Iris at additional cost.

8N20

A long range unit having an 8" lens for a recommended throw of 50-100' with a beam spread of 10' in the spot position and 95' in the flood position at a throw of 75'. Unit furnished with a heavy base telescopic floor stand, pin-plug connectors and 25' cable unless specified otherwise. Accessories: No. 23 hand color wheel, No. 35AC motor color wheel and No. 258 Iris at additional cost.


8N24

A long range unit having an 8" lens for a recommended throw of 50-100' with a beam spread of 8' in the spot position and 105' in the flood position at a throw of 75'. This unit has a longer hood than the 8N20 to accommodate the longer focal length lens. Unit furnished with a telescopic roller caster stand, pin-plug connectors, line switch and 25' cable unless specified otherwise. Accessories: Same as No. 8N20.



NO. 8N24

Catalog Number	Watts	Lens Size	Dimensions in Inches				Wght. Lbs.	Recommended Lamps Ordering Abbreviations	Color Frame	
			A	B	C	D			Cinemoid	Glass
6N19	2000	6"	20½"	15½"	—	10"	24	2M/G48/4	566	566G
8N20	2000	8"	21½"	16½"	—	11½"	30	2M/G48/4	570	570G
8N24	2000	8"	26"	17"	—	13"	34	2M/G48/4	570	570G

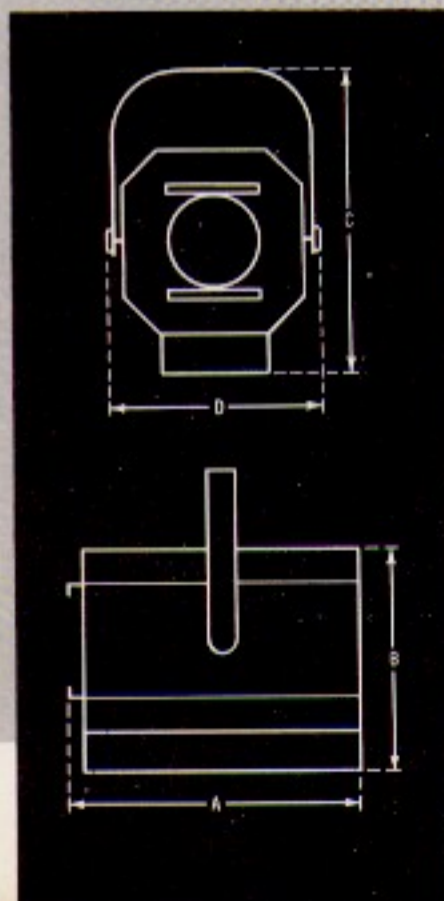


For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount, (for Series 53, 5310, 70 and 71 only).

Suffix	Description	Accessories
A	Wall bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connector & 25 feet of cable.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

Example: — No. 71E indicates a No. 71 Plano Convex Spotlight with a Pipe Clamp Mount and 2 foot Asbestos Leads.

Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to unit catalog number.

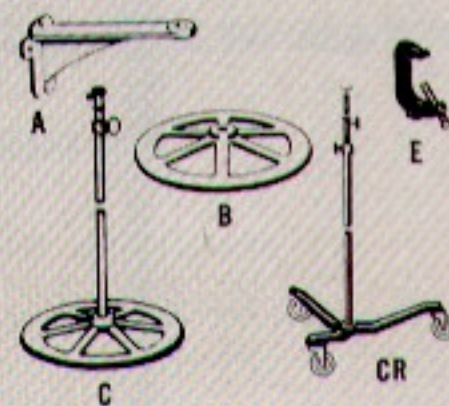

KLIEGL PLANO-CONVEX

FEATURES:

- Easily focused from flood to spot.
- Light-tight housing construction.
- Well ventilated for maximum air circulation and cooling.
- Hinged door makes relamping very fast and easy.
- Sturdily constructed of aluminum and sheet steel.
- Designed to take color frames or color wheels.
- Available from 250 to 2000-watts.
- Baked wrinkle exterior finish, dull black interior.



NO. 53B

53 SERIES

A compact 250/400 watt short range spotlight with 4½" lens; very serviceable where concealment is necessary or space is limited. Unit has a recommended throw of 5-15' with a beam spread of 4' in the spot position to 10' in the flood position at a throw of 10'. Light-tight sheet steel housing. Well ventilated to assure proper lamp life. Hinged top for easy relamping. All units are equipped with color frame holder, five-foot heater cord and attachment plug. The medium screw base lamp receptacle is mounted on an adjustable carriage providing easy focusing. Accessories: No. 14 hand operated color wheel, No. 14AC motor operated color wheel, No. 941 Alzak Reflector and No. 941F reflector holder at additional cost.

5310 SERIES

A 250/400 watt medium range spotlight with a 4½" lens. Same type design and construction as 53 Series with the exception that a longer focal length lens is used and the housing correspondingly lengthened. Unit has a recommended throw of 10-25' with a beam spread of 5' in the spot position to 30' in the flood position at a throw of 25'. Accessories: Same as 53 Series.

Catalog Number	Watts	Lens Size	Dimensions in Inches				Wght. Lbs.	Recommended Lamps Ordering Abbreviations	Color Frame	
			A	B	C	D			Cinemoid	Glass
53	250/400	4½"	7¾"	8"	10"	6¾"	5	250G/SP 400G/SP	574	—
5310	250/400	4½"	10½"	8"	10"	6¾"	6	250G/SP 400G/SP	574	—



NO. 70

70 SERIES

A 1000/1500 watt medium range spotlight with a 6" lens, cast aluminum and sheet steel construction. Recommended throw is 20-40' with a beam spread of 5' in the spot position and 20' in the flood position at a throw of 25'. Rigid, light weight construction combines strength with handling ease; hinged-top access door for easy relamping. Light tight and correctly ventilated to assure proper lamp life. Equipped with spun aluminum Alzak finished reflector and mogul prefocus base lamp receptacle on a sliding carriage for focusing ease. Accessories: No. 22 hand color wheel, No. 31AC motor color wheel and No. 257 Iris at additional cost.

71 SERIES

A 2000 watt medium to long range spotlight with a 6" lens having the same type design and construction as 70 Series with the exception that the housing is proportionately larger to accommodate the larger wattage lamp and longer focus lens. The recommended throw of the unit is 30-60' with a beam spread of 8' in the spot position and 36' in the flood position at a throw of 40'. Accessories: Same as 70 Series.

Catalog Number	Watts	Lens Size	Dimensions in Inches				Wght. Lbs.	Recommended Lamps Ordering Abbreviations	Color Frame	
			A	B	C	D			Cinemoid	Glass
70	1000/1500	6"	13"	11½"	16½"	10"	14	1000/G40/PSP 1500/G40/15	566	566G
71	2000	6"	15"	13"	17½"	11"	18	2M/G48/4	566	566G

SPOTLIGHTS (CONT.)

Catalog Number	Watts	Recommended Lamps		Weight	Dimensions
	Lens Size	Color Frames		Throw	
		Cinemoid	Glass		

ROUND BEAM WITH SPINDLE FOCUSING UNIT

43N3	100*/150	100/G16½/1DC 150/16½/3DC		3 lbs	A. 5¼"
	3"	1032	1032G	2' to 10'	B. 5½" C. 7½" D. 4½"
43NS6	500*/750	500/T20/64 750/T20P/SP		6 lbs	A. 9"
	6"	1036	1036G	5' to 25'	B. 9" C. 11½" D. 9"
43P6	500*/750	500/T20/70 750/T24/5		6 lbs	A. 9"
	6"	1036	1036G	5' to 25'	B. 9" C. 11½" D. 9"
43N8	1M/2M*	1M/G40/23 1500/G40/21		15 lbs	A. 13"
	8"	570	570G	15' to 40'	B. 15" C. 21" D. 12½"
43P8	1M/2M*	1M/G48/11 2M/G48/8SP		15 lbs	A. 13"
	8"	570	570G	15' to 40'	B. 15" C. 21" D. 12½"
43N12	2000*	2M/G48/17		29 lbs	A. 18"
	12"	578	---	20' to 50'	B. 18" C. 24" D. 18"
43N16	5000	5M/T64/3		42 lbs	A. 24"
	16"	585	---	30' to 60'	B. 20" C. 28" D. 22"
43N20	10,000	10M/G96/2		70 lbs	A. 30"
	20"	586	---	30' to 60'	B. 28" C. 36½" D. 29"

43N3 — Cast aluminum housing. Hinged top for easy relamping. Double contact bayonet base lamp receptacle. Supplied with 6' heater cord and plug.

43NS6 — Streamlined sheet steel housing with double wall construction. Hinged front door for easy relamping. Medium prefocus base lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments with pin-point focus position indicator on housing side.

43P6 — Cast aluminum and sheet steel construction. Hinged front door for easy relamping. Double wall construction. Medium bipost lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments with pin-point focus position indicator on housing side.

43N8 — Same construction and details as 43P6 but with mogul prefocus base lamp receptacle.

43P8 — Same construction and details as 43N8 but with mogul bipost lamp receptacle.

43N12 — Same construction and details as 43N8 but with wire side adjustment handles and a mogul bipost lamp receptacle.

43N16 — Same construction, lamp receptacle and details as 43N12.

43N20 — Same construction, lamp receptacle and details as 43N16.

ROUND BEAM WITH SLIDING CARRIAGE • KNOB FOCUSING

43N6	500*/750	500/T20/64 750/T20P/SP		6 lbs	A. 9"
	6"	1032	1032G	5' to 25'	B. 9" C. 11½" D. 9"


43N6 — Streamlined sheet steel housing with baffled vents. Hinged front door for easy relamping. Medium prefocus base lamp receptacle on sliding focusing carriage with knob adjustment.

* U/L Approved with indicated lamp.

MOUNTING DATA AND INFORMATION

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

Suffix	Description	Accessories
A	Wall Bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connector and 25 feet of cable—All 12", 16", and 20" units also equipped with knife switch.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

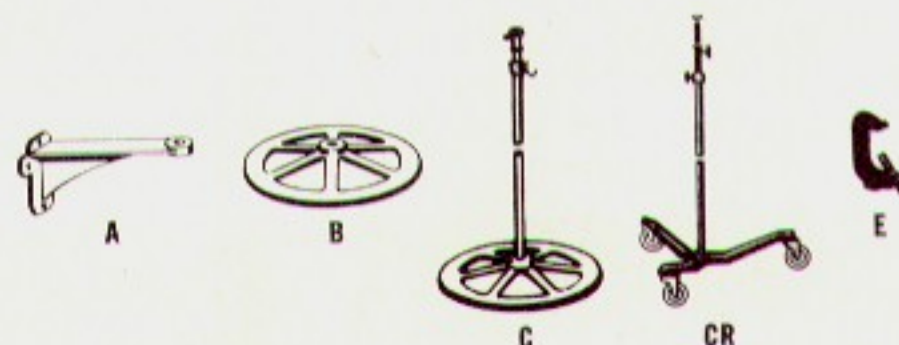

EXAMPLE: No. 43N8-E indicates a No. 43N8 Round Beam Fresnel Lens Spotlight with a pipe clamp mount and 2 foot asbestos leads.

KLIEGL FRESNEL LENS

FEATURES:

- Exceptionally efficient in light output
- Light weight, sturdy construction
- Easy to focus, simple to adjust
- Polished Alzak aluminum reflectors
- Slide grooves in front for color frames
- No stray reflections or spill light
- Universally mounted
- Crystallized baked enamel finish

Lens: Heat resisting Pyrex glass, designed to assure most efficient control and distribution of light rays. Each lens has ceramic black risers to eliminate side glare.

Ventilation: New 360° placement of air vents provides maximum air circulation and cooler operation. Redesigned system assures longer lamp life.

Construction: New type light-tight aluminum and sheet steel construction gives highest possible unit strength without sacrifice of handling ease or increased weight. Carefully inspected before shipment.

Available: From 100 to 10,000 watts; 3" to 20" lens diameter with a wide range of optional mounts.

Listed spotlights are furnished with yoke only; 2' asbestos leads; no lamp. For proper order number for lamps, see chart. For information concerning mounts, see list on following page.

Catalog Number	Watts	Recommended Lamps		Weight	Dimensions	
	Lens Size	Color Frames		Throw		
		Cinemoid	Glass			
OVAL BEAM WITH SPINDLE FOCUSING UNIT						
43NS06	500*/750 6"	500/T20/64 750/T20P/SP		6 lbs	A. 9"	43NS06 — Streamlined sheet steel housing with double wall construction. Hinged front door for easy relamping. Medium prefocus base lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments with pin-point focus position indicator on housing side. Oval Fresnel Lens.
		1036	1036G	5' to 25'	B. 9"	
					C. 11½"	
					D. 9"	
43P06	500*/750 6"	500/T20/70 750/T24/5		6 lbs	A. 9"	43P06 — Cast aluminum and sheet steel housing. Double wall construction. Hinged front door for easy relamping. Medium bipost lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments. Pin-point focus position indicator on housing side. Oval Fresnel Lens.
		1036	1036G	5' to 25'	B. 9"	
					C. 11½"	
					D. 9"	
43N08	1M/2M* 8"	1M/G40/23 1500/G40/21 2M/G48/5		15 lbs	A. 13"	43N08 — Oval Fresnel Lens — Same as 43N8.
		570	570G	15' to 40'	B. 15"	
					C. 21"	
					D. 12½"	
43P08	1M/2M* 8"	1M/G48/11 2M/G48/17		15 lbs	A. 13"	43P08 — Oval Fresnel Lens — Same as 43P8.
		570	570G	15' to 40'	B. 15"	
					C. 21"	
					D. 12½"	
OVAL BEAM WITH SLIDING CARRIAGE • KNOB FOCUSING						
43N06	500*/750 6"	500/T20/64 750/T20P/SP		6 lbs	A. 9"	43N06 — Oval Fresnel Lens — Same as 43N6.
		570	570G	5' to 25'	B. 9"	
					C. 11½"	
					D. 9"	

43NS06 — Streamlined sheet steel housing with double wall construction. Hinged front door for easy relamping. Medium prefocus base lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments with pin-point focus position indicator on housing side. Oval Fresnel Lens.

43P06 — Cast aluminum and sheet steel housing. Double wall construction. Hinged front door for easy relamping. Medium bipost lamp receptacle. Aluminum spindle in brass slide guide with front and rear focus adjustments. Pin-point focus position indicator on housing side. Oval Fresnel Lens.


43N08 — Oval Fresnel Lens — Same as 43N8.

43P08 — Oval Fresnel Lens — Same as 43P8.

43N06 — Oval Fresnel Lens — Same as 43N6.

* U/L Approved with indicated lamp.

Grounded Equipment: All units can be supplied with two wires plus ground and may be specified by adding the suffix "G" to the catalog number.

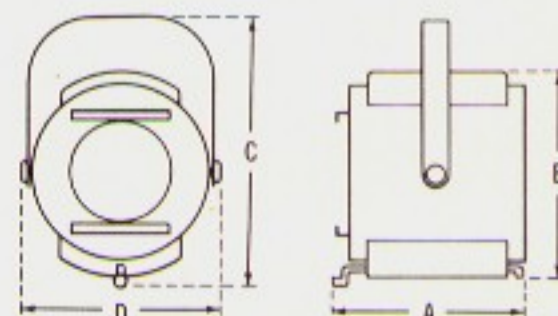

LENS SPOTLIGHTS

Round Beam



The conventional Round Beam Fresnel Spotlight is an exceptionally versatile instrument. It produces a circular beam of light for either general area illumination or soft edge high intensity spotting.

Very efficient and easy to handle, and with its companion unit, the Oval Beam Fresnel Lens, provides the most useful unit for stage production lighting. Focusing ranges from a minimum spot, clear, clean and free from filament images, to a maximum flood which is surprisingly uniform in distribution. Available from the smallest 3" diameter lens with 100 watt lamp to largest 20" diameter lens for 10,000 watt lamp.

Beam spread from spot to flood is approximately 10° to 55° and is always of uniform intensity without filament image or dark center.



NO. 43N12E

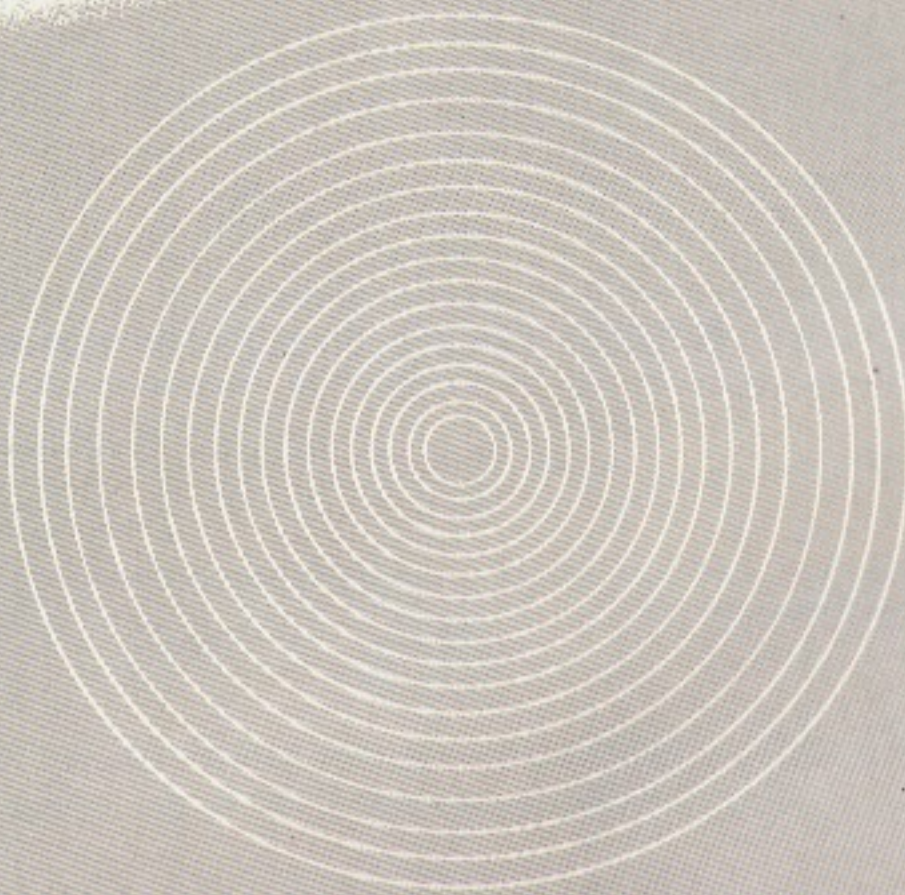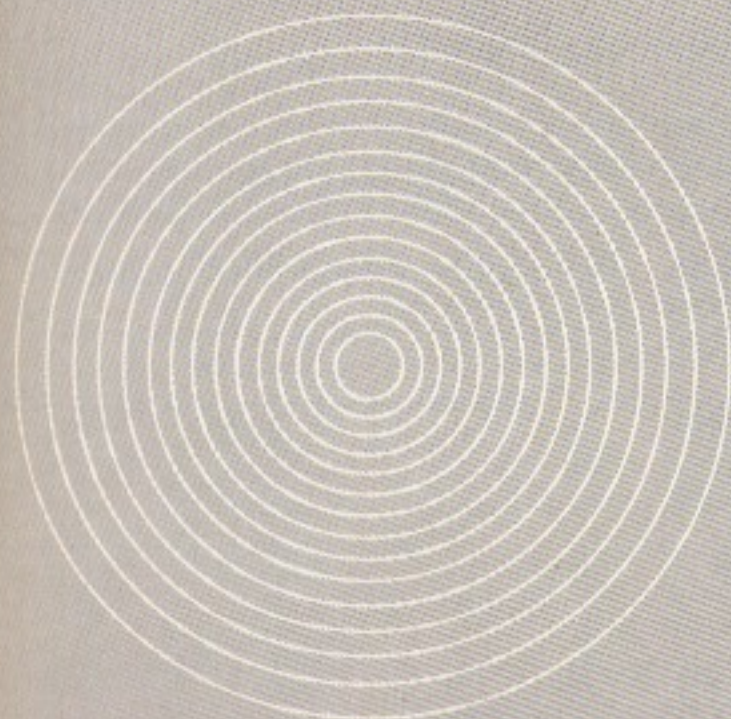

KLIEGL FRESNEL





Oval Beam

Another Kliegl First!

Fresnel Spotlights, equipped with the new Kliegl scientifically designed lens* employing a revolutionary optical principle, provide a controlled oval shape beam of light that satisfies a long-felt demand for elongated illumination. Focusable from spot to flood and excellent for use from the balcony front for curtain and stage front lighting, ideal for batten spots and back lighting. For wing positions where light must be projected through a narrow opening, simply rotating the lens does the trick.

Any desired degree of vertical or horizontal placement of the oval beam may be accomplished by merely rotating the lens . . . see sketch.

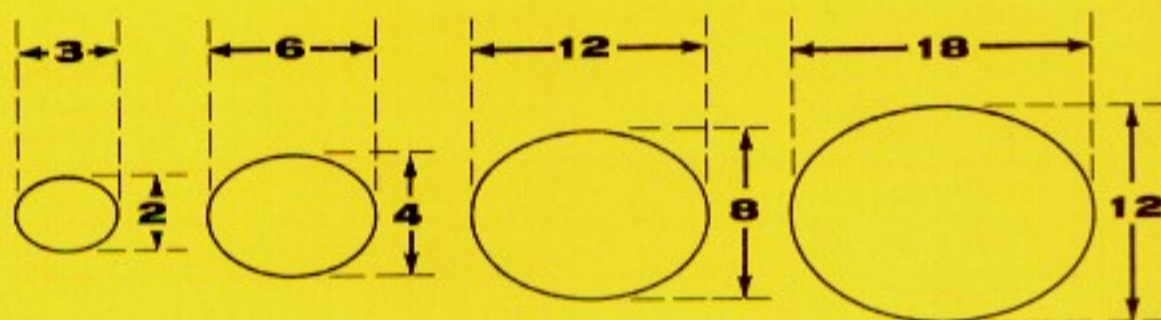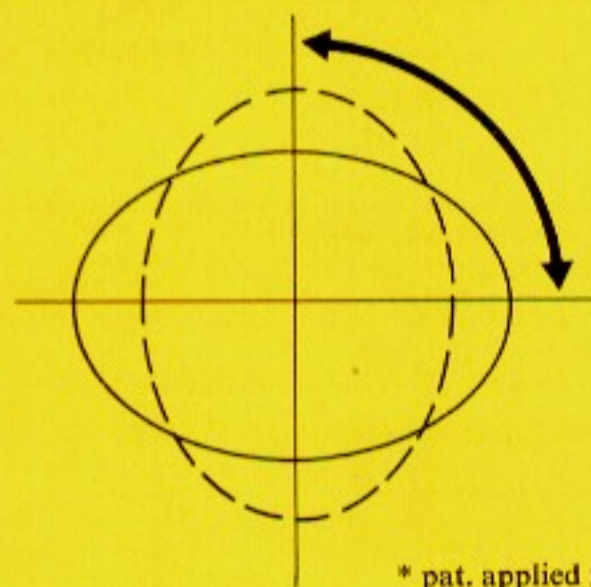

This controlled oval beam always maintains a spread ratio of approximately 3 to 2 regardless of whether floor or spot positions are required . . . see diagram.

REMOTE COLOR CONTROL

FEATURES:

- Uses high intensity Klieglight.
- Cast aluminum motor housing.
- Solid bronze counterweights.
- Provides for projection of many colors from limited space and from a single light source.
- Available with two colors and white or four colors and white.
- Permits color blending.
- Smooth, silent, quick action.
- Permits complete color control regardless of location of light source.

Catalog Number	Lens Size & Type	No. Colors Plus White	Recommended Throw	Size Spot At Indicated Throw	Intensity of Given Spot*	Test Lamp Used
1365W-BAC/4	6" Wide Beam	4	10' to 25'	25' Spot @ 25' Throw	60 F/C	500/T14/8
1365W-BAC/2	6" Wide Beam	2	10' to 25'	25' " @ 25' "	60 F/C	"
1365-BAC/4	6" Standard Beam	4	15' to 40'	12' " @ 25' "	100 F/C	"
1365-BAC/2	6" Standard Beam	2	15' to 40'	12' " @ 25' "	100 F/C	"
1366W-BAC/4	6" Wide Beam	4	30' to 50'	40' " @ 40' "	70 F/C	2M/T30/1
1366W-BAC/2	6" Wide Beam	2	30' to 50'	40' " @ 40' "	70 F/C	"
1366-BAC/4	6" Standard Beam	4	30' to 75'	30' " @ 60' "	45 F/C	"
1366-BAC/2	6" Standard Beam	2	30' to 75'	30' " @ 60' "	45 F/C	"
1368-BAC/4	8" Narrow Beam	4	30' to 80'	20' " @ 60' "	60 F/C	"
1368-BAC/2	8" Narrow Beam	2	30' to 80'	20' " @ 60' "	60 F/C	"

* Indicated foot candles are for white light only and are only approximate. If more exacting data is required, send for our distribution curves.

Units	Recommended Lamps		
All 1365 units	500/T14/8	750/T14	
All 1366 & 1368 units	1M/T24/5	1500/T24/6	2M/T30/1

STANDARD BEAM LENS

Have about a 28° spread, which is equal to approximately one-half foot beam spread for every foot of throw.

WIDE BEAM LENS

Have about a 53° spread, which is equal to approximately one foot beam spread for every foot of throw.


NARROW BEAM LENS

Have about a 19° spread, which is equal to approximately one-third foot beam spread for every foot of throw.

FRONT LIGHTS WITH REMOTE COLOR CONTROL			
Catalog No.	Watts	No. of Colors	Beam Spread
UNITS WITH BUILT-IN SHUTTERS			
2170-BAC/4	500/750	4	53°
2170N-BAC/4	500/750	4	28°
2171-BAC/4	1500/2000	4	53°
2171N-BAC/4	1500/2000	4	28°
UNITS WITH DROP-IN SHUTTERS			
2165-BAC/4	500/750	4	53°
2167-BAC/4	1000	4	53°
2169-BAC/4	1500/2000	4	53°

BAC/2 color unit available as independent accessory (without light).
Prices and information on request.

KLIEGLIGHTS with

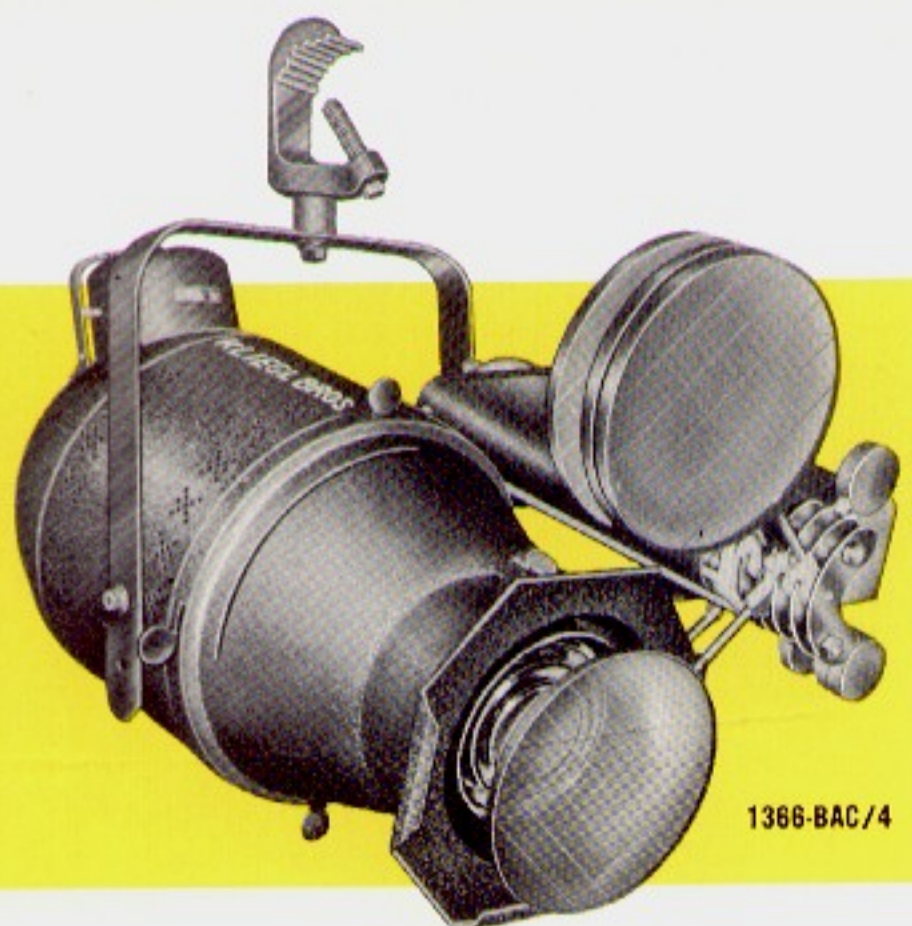

1366-BAC/4

High intensity Klieglights coupled with remote color control units eliminate manual color changes by permitting distant control of several colors and white from a single light source.

Available with standard, wide or narrow beam spreads with either two or four colors, plus white. Colors may be used separately or blended, as desired. Units of 500 to 2000 watts. Where several light sources are used to obtain light from different locations, all color changes can be coordinated by one operator from one central location.

MOTOR CONTROL

In the motor-operated units, each color frame is independently driven by its own fractional horsepower motor. Individual limit switches prevent all current flow except when frame is actually moving. The 115 volt AC motors provide noiseless, smooth, even color changes or blending without hesitation. Control of one or many units is possible from control panel at a distant point.

MOUNTING DATA AND INFORMATION

All units are provided with a pipe clamp for 1½" pipe unless otherwise specified. For other available mounts, please refer to mounting section, pages 70 and 71.

COLOR FRAMES

Furnished with natural color glass inserts. Available colors: Red, Blue, Green, Amber, Pink and Surprise Pink.

IRIS SHUTTERS


Iris shutters are available in any of the listed units at slight additional cost. To specify, add word "iris" to catalog No.

GROUNDING EQUIPMENT

All listed units can be supplied with two wires plus ground and may be specified by the addition of the suffix "G" to the catalog number.

Remote color control is also available on other Kliegl Spotlights, such as Front Lights, found on page 12. Particulars regarding any specific unit sent upon request.

Units with Selsyn-synco control are available where absolute coordination of all units is required. Prices and information sent upon request.

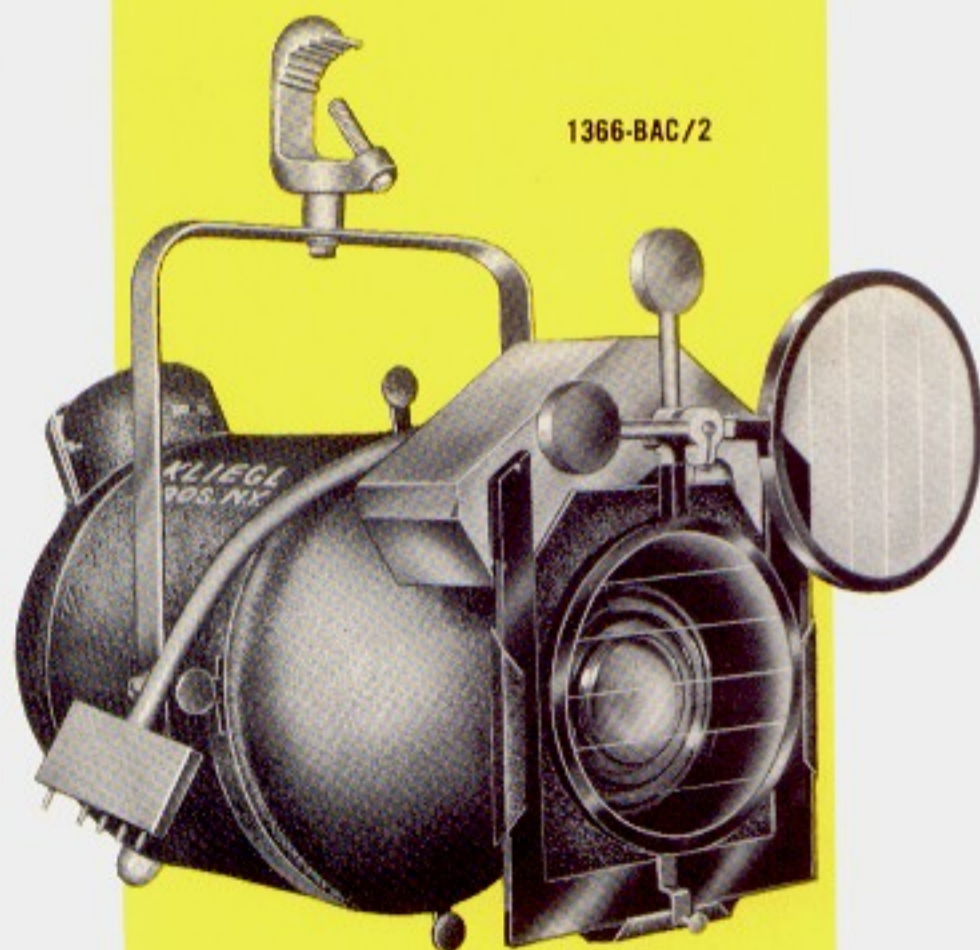


1366-BAC/2

FRONT LIGHTS

ANGULAR MODELS

CEILING MOUNTING

- Selective lens system for either standard or wide beam spread.
- Ideal for front lighting a stage, spotlighting people or objects, a floor show etc.
- Recommended use: 500/750 watt units for schools, night clubs, hotel ball rooms, tributary theatres and the like. 1500/2000 watt units for professional theatres and other locations where projection distances exceed 40 feet.

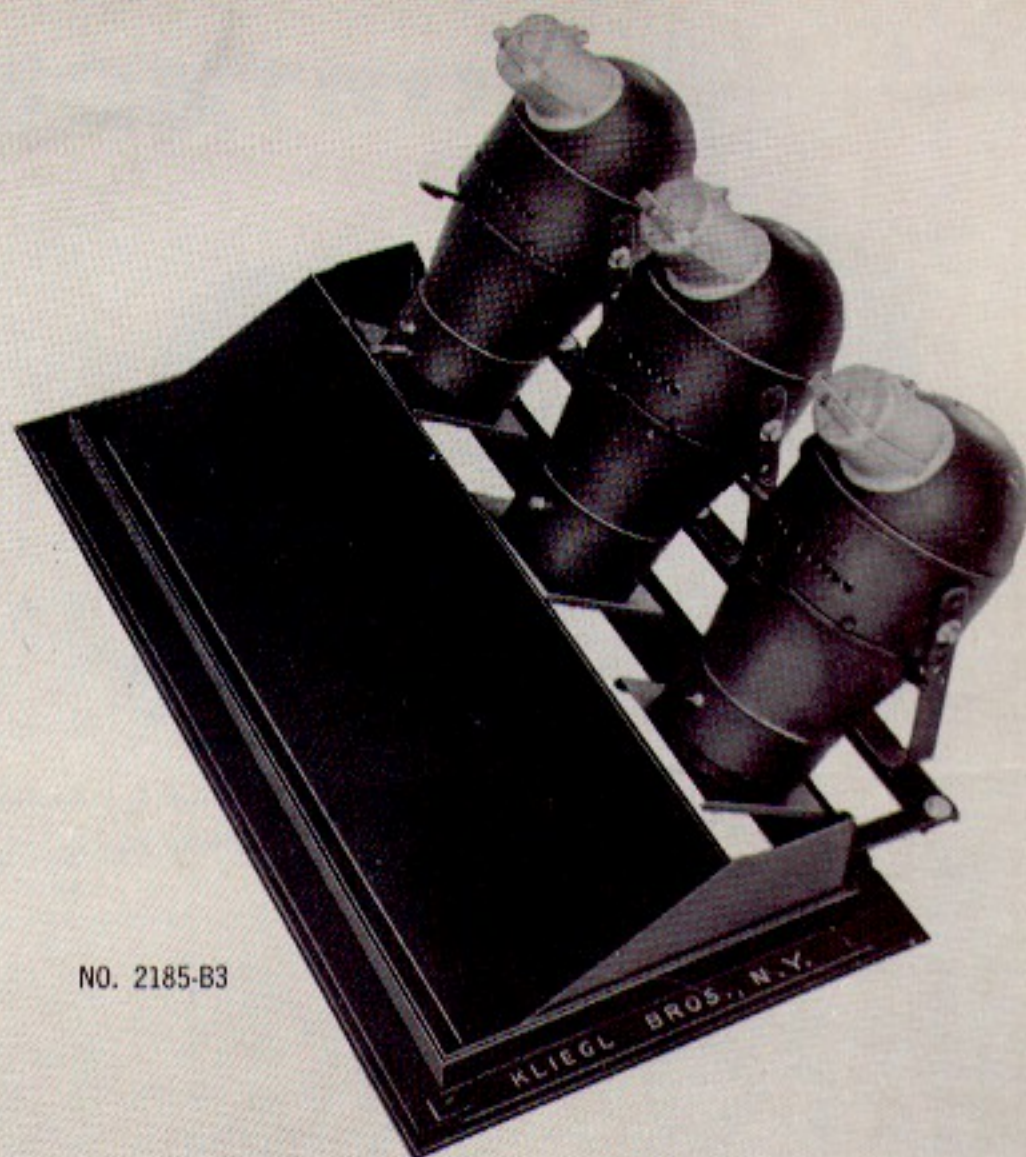


NO. 2185-B3

Catalog Number	Watts	Dimensions in Inches				Weight in Lbs	Beam Spread	Beam Lumens Per Unit		Recommended Lamps Ordering Abbreviations	Color Frames	
		A	B	C	D			Watts	Lumens		Gelatine	Glass
SINGLE UNITS WITH BUILT-IN SHUTTERS												
2170	500* 750	18	20	16¾	3½	18	53°	500 750	3100 4650	500/T14/8 750/T14	1036	1036G
2170N		20	20	16¾	6½	19	28°	500 750	3000 4500			
2171	1500* 2000	23	20	16¾	9	33	53°	1500 2000	8700 12500	1500/T24/6 2M/T30/1		
2171N		26	20	16¾	12	34	28°	1500 2000	7400 10550			
SINGLE UNITS WITH DROP-IN SHUTTERS												
2165	500 750	17	20	16¾	1½	16	53°	500 750	2500 3750	500/T14/8 750/T14	1033	1033G
2167	1000	23	20	16¾	9	26	53°	1000†	6000	1M/T24/12	1036	1036G
2169	1500 2000	23	20	16¾	9	27	53°	1500 2000	8400 12000	1500/T24/6 2M/T30/1		
3 UNIT ASSEMBLIES WITH BUILT-IN SHUTTERS												
2185B3	500* 750	20	21x42	17x37½	10½	71	53°	500 750	3100 4650	500/T14/8 750/T14	1036	1036G
2185B3N		20	21x42	17x37½	10½	74	28°	500 750	3000 4500			
2186B3	1500* 2000	23	21x54	17x49½	19	116	53°	1500 2000	8700 12500	1500/T24/6 2M/T30/1	570	570G
2186B3N		23	21x54	17x49½	19	120	28°	1500 2000	7400 10550			
4 UNIT ASSEMBLIES WITH BUILT-IN SHUTTERS												
2185B4	500* 750	20	21x54	17x49½	10½	94	53°	500 750	3100 4650	500/T14/8 750/T14	1036	1036G
2185B4N		20	21x54	17x49½	10½	98	28°	500 750	3000 4500			
2186B4	1500* 2000	23	21x66	17x61½	19	154	53°	1500 2000	8700 12500	1500/T24/6 2M/T30/1	570	570G
2186B4N		23	21x66	17x61½	19	158	28°	1500 2000	7400 10550			

† 1000 hour life lamp; all others are 200 hour life.

* U/L Approved with indicated lamp.

Glass color frames recommended.

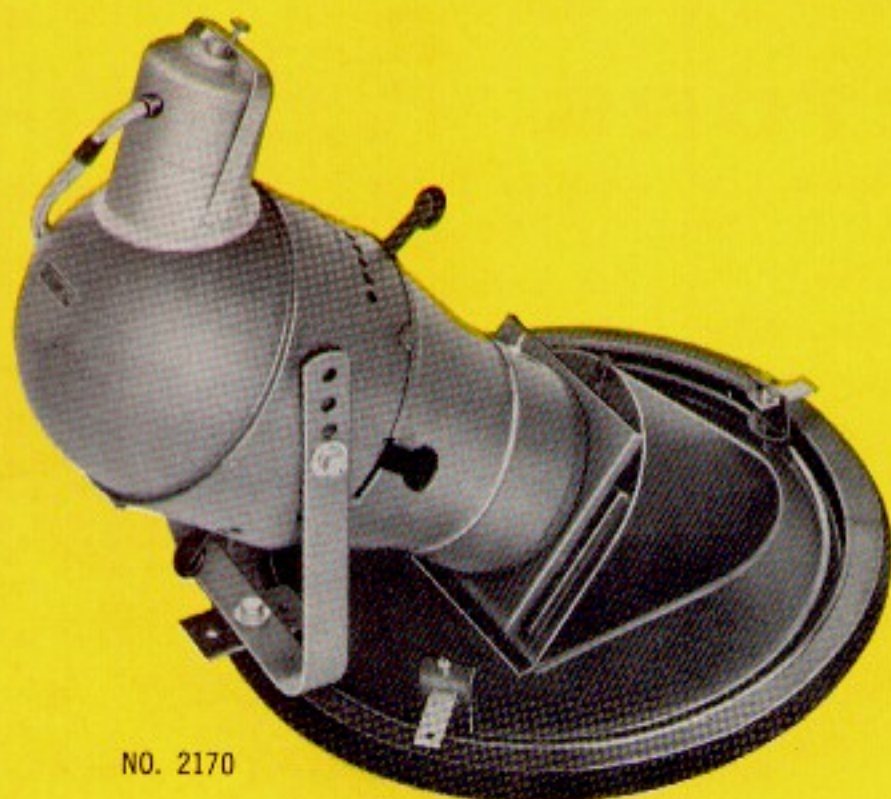

NO. 2170

KLIEGLIGHTS...

ADJUSTABLE BEAM

FOR FLUSH

FEATURES:

- Perfected method of mounting simplifies installation.
- Light beams may be controlled by shutters to conform with area to be illuminated.
- Uses standard Klieglight with highly efficient ellipsoidal reflector and focusable lens system.
- Provides high-intensity accent lighting from least obvious source.

All units, unless specified as having drop-in shutters, are equipped with four-way framing shutters with individual shutter control and angular adjustment. Iris shutters are available for all units. All units are equipped with color frame holders and plaster rings. All units may be relamped from above or below the ceiling.

We suggest that the following three points be considered when selecting a front light for a specific use:

1. Throw — The distance from the unit to the object to be illuminated.
2. Beam Spread — Select the unit with a beam spread which just covers the maximum area to be lighted.
3. Wattage — Select the unit with the wattage which produces the desired intensity.

SINGLE UNITS

Adjustably mounted on circular frame with hinged front plate. Circular plate makes installation easy and eliminates any possibility of directional error in mounting. Units may be rotated and tilted to direct beam in required angular direction.

MULTIPLE UNITS

Groups of three or four Klieglights on a single light outlet mounting to be used either singularly with different colors or in groups for high intensity output.

ORDERING DATA


All units may be had with remote control color changers. For information on color changers, see page 14. Specifications and prices sent on application.

All units regularly furnished with five-foot leads and Greenfield Connector. Beam spread of 53° is equal to approximately one foot of spread for each foot of throw. Beam spread of 28° is equal to approximately one-half foot of spread for each foot of throw.

Iris shutters — All listed units may be had with iris shutters at slight additional cost. To specify when ordering, add word "iris" after catalog number.

Grounded equipment — All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to the catalog number.

For surface, cove or balcony front mounted units, see "Klieglights" pages 6-10.

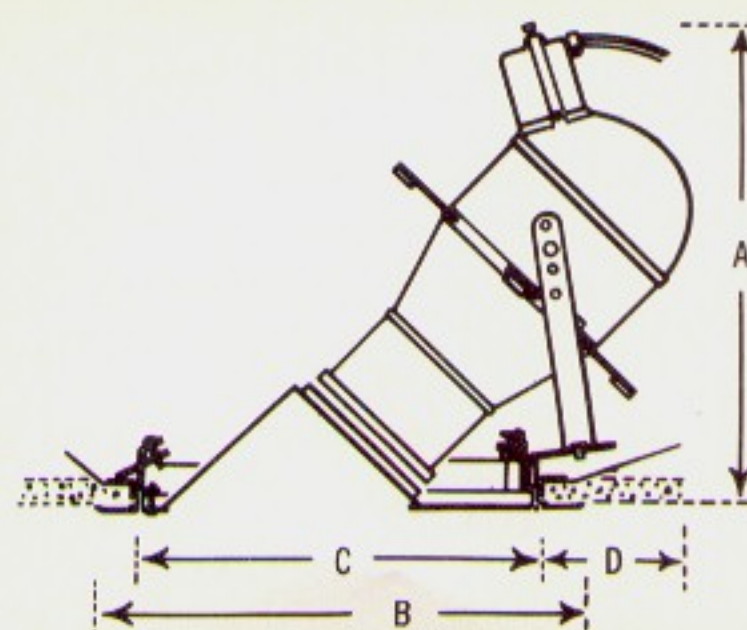

KLIEGLIGHTS (CONT.)

PATTERN PROJECTORS

Pattern projectors are standard model Klieglights that have been modified to permit the projection of patterns of various shapes and designs. All of these units are of the identical construction, size, characteristics and performance specifications as their corresponding Klieglight counterparts. For dimensions, weights, etc., please refer to the catalog page showing standard counterparts. (1365 units — Page 7, 1366 units — Page 8, 1374 units — Page 9). All units are supplied with built-in four-way shutter and pattern holder.

Catalog Number	Recommended Lamps
1365P 1365PW	250/T14/9 500/T14/8 500/T14/7 750/T14
1366P 1366PW	1M/T24/5 1500/T24/6 2M/T30/1
1374P 1374PW	3M/T32/2

Catalog Number	Lens Size	Test Lamp	Size Spot @ Throw†	Projection Intensity‡	Color Frames	
					Cinemoid	Glass
1365P	6"	500/T14/8	12' @ 25'	100 F/C	1036	1036G
1365PW	6"	500/T14/8	25' @ 25'	60 F/C	1036	1036G
1366P	6"	2M/T30/1	12' @ 25'	275 F/C	570	570G
1366PW	6"	2M/T30/1	25' @ 25'	150 F/C	570	570G
1374P*	6"	3M/T32/2	12' @ 25'	375 F/C	570	570G
1374PW*	6"	3M/T32/2	25' @ 25'	180 F/C	570	570G

* These units are available with iris shutters (in place of four-way shutter) and pattern holder. To order this model, add word "Iris" to unit catalog number.

‡ These figures are for the projector with slide removed and are only approximate. If more exacting data is required send for our distribution curves.

† Beam spread reduced to 0.7 when slide is inserted.


Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to catalog number.

MOUNTING DATA AND INFORMATION

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

Suffix	Description	Accessories
A	Wall Bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connector and 25 feet of cable — All 1366 & 1374 series also equipped with knife switch.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

EXAMPLE: No. 1365P-E indicates a No. 1365P Pattern Projector with a pipe clamp mount and 2 foot asbestos leads.

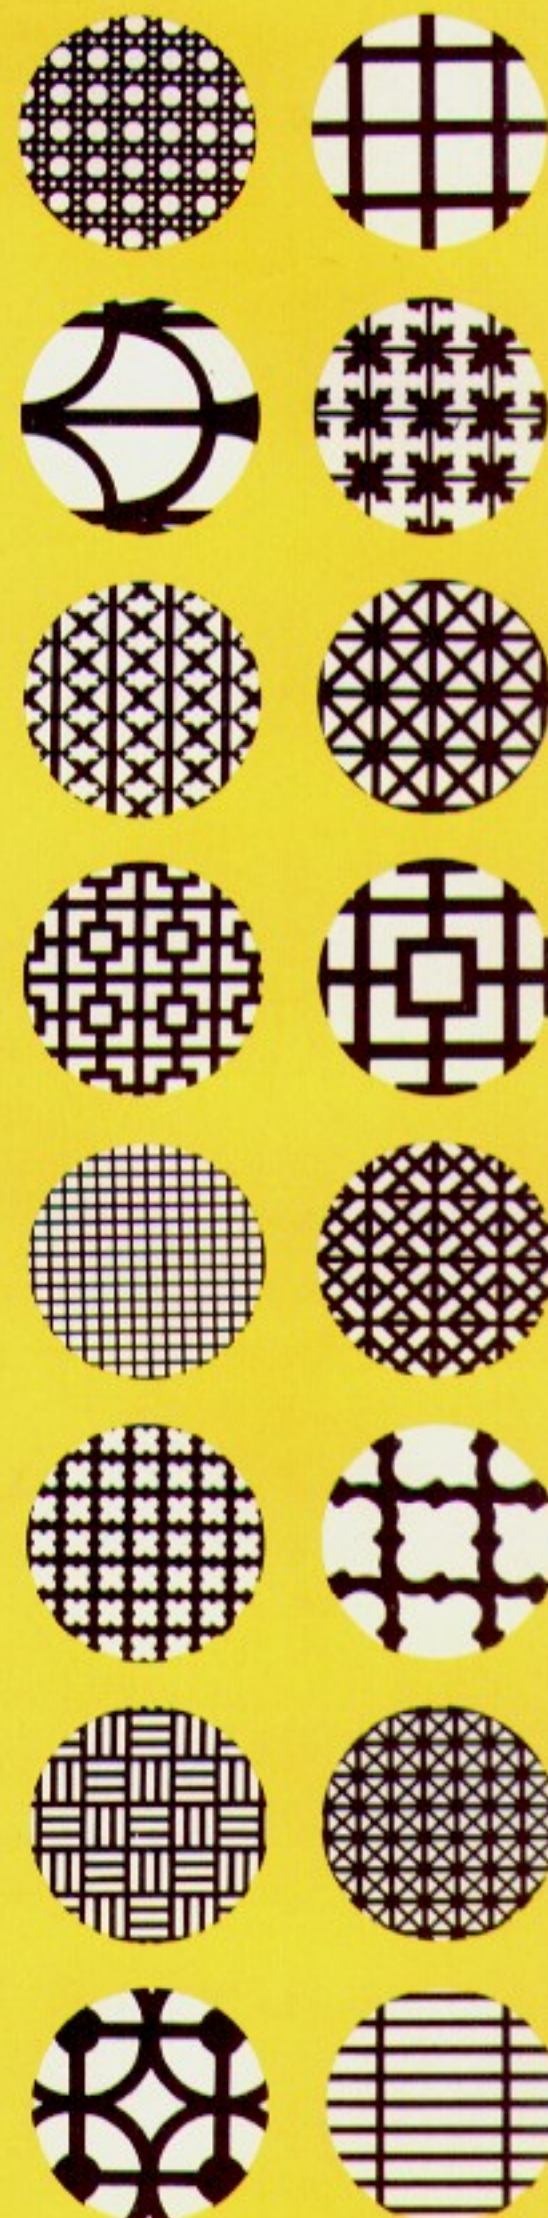

Catalog Number 1097: A set of 16 patterns (as shown) designed for use in all listed pattern projectors.

A 250/750 watt high-intensity Klieglight suitable for medium throw. Equipped with a 90° ROTATING ADJUSTABLE HEAD. Has 4-way built-in shutters. Larger reflector gives higher lumen output than other medium range Klieglights. Cast aluminum and sheet steel construction. Stepped lens and color frame holder. Furnished in Standard Beam (No. 1165), Wide Beam (No. 1165W), and Narrow Beam (No. 1165/8).



1165B

RECOMMENDED LAMPS			
250/T14/9	500/T14/7	500/T14/8	750/T14



1164B

SERIES 1163-1164-1167

A low cost line of Klieglights similar to other standard beam and wide angle beam Klieglights of comparable wattage with the exception that these units are equipped with one four-way drop-in type adjustable framing shutter and three fixed round-hole drop-in type shutters. Supplied in Standard Beam (No. 1163-1164-1167) and Wide Angle Beam (No. 1163W-1164W-1167W).

RECOMMENDED LAMPS				
Series 1163	Series 1164	Series 1167		
500/T14/8	1M/T24/5	1M/T24/5	1500/T24/6	2M/T30/1


Catalog Number	Lens Size	Test Lamp	Size Spot @ Throw	Spot Intensity*	Color Frames		Recommended Throw	Wgt. Lbs.
					Cinemoid	Glass		
1165	6"	500/T14/8	10' @ 25'	150 F/C	566		15' to 40'	14
1165W	6"	500/T14/8	20' @ 25'	90 F/C	566		15' to 40'	14
1165/8	8"	500/T14/8	6' @ 25'	230 F/C	570	570G	20' to 60'	15
1163	5"	500/T14/8	12' @ 25'	75 F/C	1033	1033G	15' to 40'	8
1163W	5"	500/T14/8	25' @ 25'	40 F/C	1033	1033G	10' to 25'	8
1164	6"	1M/T24/5	24' @ 50'	30 F/C	1036	1036G	30' to 75'	18
1164W	6"	1M/T24/5	50' @ 50'	25 F/C	1036	1036G	30' to 50'	18
1167	6"	2M/T30/1	24' @ 50'	60 F/C	1036	1036G	30' to 75'	19
1167W	6"	2M/T30/1	50' @ 50'	25 F/C	1036	1036G	30' to 50'	19

* These figures are only approximate. If more exacting data is required send for our distribution curves.

Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to catalog number.

MOUNTING DATA AND INFORMATION

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

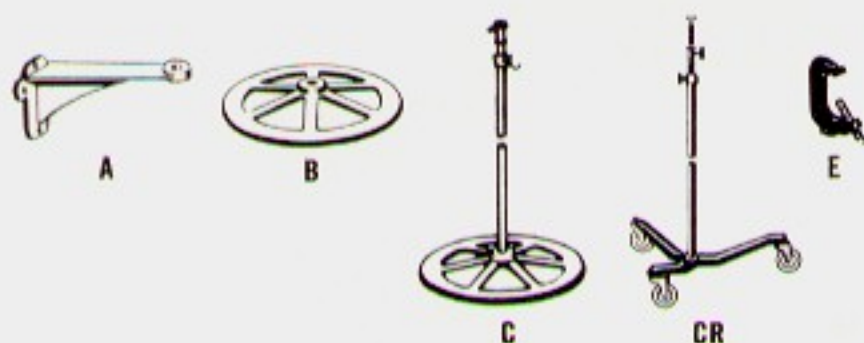

Suffix	Description	Accessories
A	Wall Bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	(No. 1165 only*) Wired with pin plug connector and 25 feet of cable.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

EXAMPLE: No. 1165E indicates a No. 1165 Klieglight pipe clamp mount with 2 foot asbestos leads.
* 1163/4/7 — normally not used with floor stands.

KLIEGLIGHTS (CONT.)

SERIES 1373 • 1374 • 1375

3000 watt high-intensity Klieglights suitable for long range throws or for extra high intensity short and medium range lighting. All units are equipped with silent blower system for proper air cooling.

FEATURES:

- All-aluminum construction provides for light weight and handling ease without any sacrifice in rigidity or strength.
- Built-in 4-way shutters with individual shutter control and angular adjustment. All units have built-in iris shutter.
- All units provided with directional grip handle and color frame holder.



No. 1375E

Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to catalog number.


Lens	1374 6" Standard Beam		1375 8" Narrow Beam		1373 8" Very Narrow Beam	
Recommended Throw	50' to 100'		50' to 100'		50' to 100'	
Size Spot @ Above Throws	24' @ 50'	48' @ 100'	16' @ 50'	32' @ 100'	12' @ 50'	24' @ 100'
Intensity of Above Spots*	94 F/C	23 F/C	140 F/C	35 F/C	140 F/C	35 F/C
Test Lamp Used	3M/T32/2		3M/T32/2		3M/T32/2	
Color Frame No. For Cinemoid	570		570		570	
Color Frame No. For Glass	570G		570G		570G	
Weight — Net — Lbs.	41		42		45	
Recommended Lamp	3M/T32/2					

* These figures are only approximate. If more exacting data is required send for our distribution curves.


No. 1373—Equipped with a PLANO-CONVEX lens for a sharp edge beam

MOUNTING DATA AND INFORMATION

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

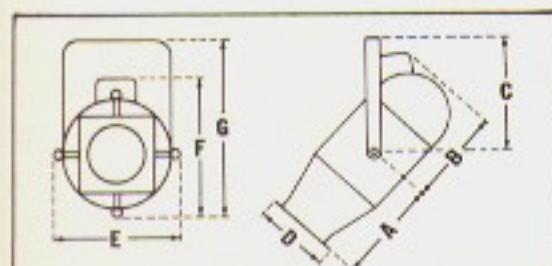

Cat. No.	A	B	C	D	E	F	G
1373	24"	19"	18 1/4"	11"	22"	24"	31"
1374	21"	19"	18 1/4"	11"	22"	24"	31"
1375	21"	19"	18 1/4"	11"	22"	24"	31"

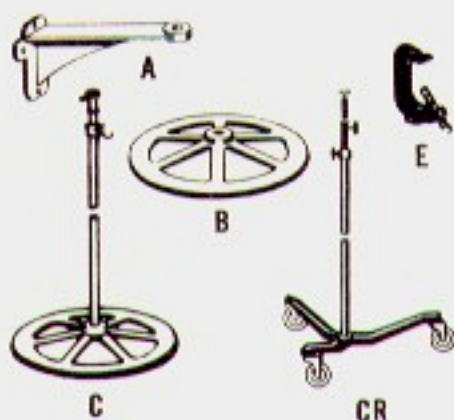

Suffix	Description	Accessories
A	Wall Bracket	2' Leads and Pin Plug Connectors
B	Table Base	2' Leads and Pin Plug Connectors
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connectors, 25 feet of cable and knife switch.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Leads and Pin Plug Connectors. "C" Clamp shown. Bridge type furnished where desired.

EXAMPLE: No. 1375E indicates a No. 1375 Klieglight with a pipe clamp mount with 2 foot asbestos leads and Pin Plug Connectors.

KLIEGLIGHTS (CONT.) SERIES 1366 • 1368



No. 1366E

A 1000/2000 watt high-intensity Klieglight suitable for medium to long range throw. Equipped with Pyrex glass stepped lens with black ceramic risers. Universally mounted with directional grip handle and color frame holder.

FEATURES:

- Light-tight rigid sheet steel construction combines strength with low weight; provides for easy adjustment and handling.
- Built-in 4-way shutters with individual shutter control and angular adjustment.
- Iris shutter available as optional equipment.

Iris Shutter: If iris shutter is desired, add word "iris" after catalog number of desired unit.

Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to catalog number.

Lens	1366 6" Standard Beam		1368 8" Narrow Beam	
	30' to 75'		30' to 80'	
Recommended Throw	30' to 75'		30' to 80'	
Size Spot @ Above Throws	14.5' @ 30'	36' @ 75'	9.5' @ 30'	25.5' @ 80'
Intensity of Above Spots*	190 F/C	30 F/C	240 F/C	61 F/C
Test Lamp Used	2M/T30/1		2M/T30/1	
Color Frame No. For Cinemoid	570		570	
Color Frame No. For Glass	570G		570G	
Weight — Net — Lbs.	25		26	
Recommended Lamps	1M/T24/5	1500/T24/6	2M/T30/1	


* These figures are only approximate. If more exacting data is required send for our distribution curves.

MOUNTING DATA AND INFORMATION

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

Suffix	Description	Accessories
A	Wall Bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connector, 25 feet of cable and knife switch.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

EXAMPLE: No. 1366E indicates a No. 1366 Klieglight with a pipe clamp mount with 2 foot asbestos leads.

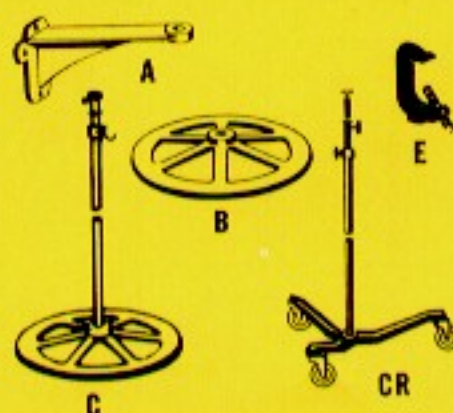

Cat. No.	Mounting Dimensions (inches)						
	A	B	C	D	E	F	G
1366	12 1/4"	13"	15"	10 1/2"	18"	18"	24"
1368	15 3/4"	13"	15"	10 1/2"	18"	18"	24"

KLIEGLIGHTS

SERIES 1365

A 250/750 watt high-intensity Klieglight for medium throw. Cast aluminum and sheet steel construction with built-in four-way framing shutter.

FEATURES:

- Individual frame control and angular adjustment
- Pyrex glass stepped lens . . . black ceramic risers
- Swivel yoke for universal mounting . . . color frame holder
- Hinged lens holder provides easy access to interior



NO. 1365

Iris Shutter: If iris shutter is desired, add word "iris" after the catalog number.


Grounded Equipment: All listed units can be supplied with two wires plus ground and may be specified by addition of suffix "G" to catalog number.

	1365		1365W		1365/8	
Lens	6" Standard Beam		6" Wide Beam		8" Narrow Beam	
Recommended Throw	15' to 40'		10' to 25'		20' to 60'	
Size Spot @ Above Throws	7' @ 15'	19' @ 40'	10' @ 10'	25' @ 25'	6.5' @ 20'	20' @ 60'
Intensity of Above Spots*	280 F/C	40 F/C	380 F/C	60 F/C	210 F/C	25 F/C
Test Lamp Used	500/T14/8		500/T14/8		500/T14/8	
Color Frame No. For Cinemoid	1036		1036		570	
Color Frame No. For Glass	1036G		1036G		570G	
Weight — Net — Lbs.	10		10		11	
Recommended Lamps	250/T14/9		500/T14/8	500/T14/7	750/T14	

* These figures are approximate. If more exacting data is required, send for our distribution curves.

MOUNTING DATA AND INFORMATION

Cat. No.	A	B	C	D	E	F	G
1365	10"	7"	10½"	6½"	13½"	14"	17"
1365W	8"	7"	10½"	6½"	13½"	14"	17"
1365/8	14¾"	7"	10½"	8½"	13½"	14"	17"

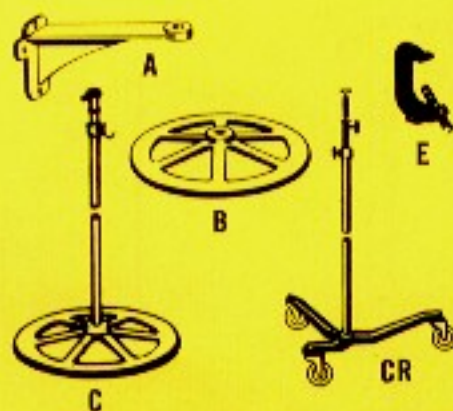

For selection of desired type of mount, add to any catalog number the suffix shown by the description of the desired mount.

Suffix	Description	Accessories
A	Wall Bracket	2' Asbestos Leads
B	Table Base	2' Asbestos Leads
C	Telescopic Heavy Base Floor Stand	Wired with pin plug connector and 25 feet of cable.
CR	Telescopic Roller Caster Stand	
E	Pipe Clamp	2' Asbestos Leads. "C" clamp shown — Bridge type furnished where desired.

EXAMPLE: No. 1365E indicates a No. 1365 Klieglight with a pipe clamp mount and 2 foot asbestos leads.

KLIEGLIGHTS



No. 1366E

In 1933 the first Klieglight, (an ellipsoidal spotlight) was used in the spectacular outdoor pageant "Romance of the People", at the Polo Grounds in New York. Its first indoor use was in the Earl Carroll Vanities of the same year.

Since that time, Kliegl Bros. have continued to improve and expand their line of famous Ellipsoidal Spotlights. With the cooperation of the various lamp manufacturers, the present base-up burning lamp was developed so as to obtain longer maintained efficiency and higher wattage units.

While the name "KLIEGLIGHTS" has a universal meaning, Kliegl Bros. are the originators and only producers of the genuine Klieglights. Look for the name!

The diagram at the right shows a few of the many sharp, uniform and brilliant light patterns that can be formed with Klieglights. All projected spots are *controlled* and have approximate uniform intensity of light over the entire illuminated area. Shuttering produces virtually no change in intensity of remaining lighted area.



FEATURES:

- Up to 3½ times the lumen output of conventional spots of equal wattage.
- Well defined cut-off light.
- Ellipsoidal spun aluminum Alzak finished reflector . . . permanent finish, easy to clean.
- Lamp holder set at ideal position to produce uniform illumination at maximum efficiency.
- Simple, easy relamping.
- Special heat-resisting metal shutters eliminate heat erosion.
- Correctly ventilated, light-tight housing assures rated lamp life.
- Uniform illumination of every size light area.
- Pyrex glass, heat-resisting lenses with black risers.
- Sturdy, light-weight aluminum and sheet steel construction.

Sizes: Available from 250 to 3,000 watts: lens diameters of 5" to 8" providing a light intensity and a beam characteristic for any specific purpose.

Ventilation: Engineered ventilation allows for proper air circulation when used within recommended mounting angles of 10° above horizon and 70° below horizon, assuring rated lamp life. Blower systems in high-wattage units.

Construction: All workmanship to highest standards. Units inspected and tested before shipment.

SELECTION OF PROPER UNIT . . .

We suggest that the following three points be considered when selecting a Klieglight for a specific use.

- 1 Throw — The distance from the unit to the object to be illuminated.
- 2 Beam Spread—Select the unit with a beam spread which just covers the maximum area to be lighted.
- 3 Wattage — Select the unit with the wattage which produces the desired intensity.




Stepped lenses are exactly produced from heat resistant Pyrex glass. They have black baked ceramic risers to eliminate side glare and spill light.



Accessible socket cap assures simplified relamping. Socket cap contains adjustment screws for minute lamp holder positioning to obtain an illumination pattern other than the standard factory-set uniform intensity. Uses standard bipost base-up burning concentrated filament lamps which eliminate any possibility of lamp bases breaking off or sticking in lamp holder.

LIST OF CONTENTS

	Page		Page
Klieglights	6	Plugging Boxes	59
Klieglights Series 1365	7	Wall Pockets	60
Klieglights Series 1366 & 1368	8	Stage Pockets	61
Klieglights Series 1373-1374-1375	9	Panel Pockets	62
Klieglights Series 1163-1164-1165-1167	10	Heavy Duty Plugs	63
Pattern Projectors	11	Plug Receptacles	63
Front Lights	12	Linnebach — Scenic Projectors	64
Remote Color Control	14	Sciopticons	64
Fresnel Lens Spotlights	16	Scenic Slide Projectors	65
Plano Convex Spotlights	20	Automatic Slide Changers	65
Stage Floodlights	22	Objective Lenses	66
Disappearing Footlights	24	Achromatic Lenses	66
Permanent Footlights	26	Effect Holders	66
Borderlights	28	Slide Carriers & Adaptors	66
Batten Strips	30	Effects	67
Cyclorama Lights	30	Music Stands & Lights	68
Proscenium Lights	31	Portable Worklights	69
Tormentor Lights	31	Enclosed Switches	69
Strip Lights	31	Mounting Brackets & Stands	70
Booth Spotlights	32	Shutters	72
Arc Spotlights	36	Barn Doors	72
Kliegboards	37	Color Frames	72
Kliegboards — (Autotransformer)	38	Color Wheels	73
Kliegboards — (Kliegtronic)	40	Lenses (Condensing — Step — Fresnel)	73
Kliegboards — (Rotolector)	42	Color Boxes	73
Kliegboards — (Safpatch)	44	Reflectors	74
Kliegboards — (Memory Switcher)	46	Lugs	74
Kliegboards — (Mag. Amp.)	48	Lamps	74
Kliegboards — (Motor Driven)	49	Carbons	74
Resistance Dimmers	50	Color Mediums	75
Autotransformers — Non interlocking	50	Cable	76
Autotransformers — Motor Driven	51	Numerical Index	77
Traveling Kliegboards	51	Alphabetical Index	80
Typical Installations	52	General Information	82
Connectors	56	Architectural Cat. Information	83



COPYRIGHT 1957 BY

KLIEGL BROS.

UNIVERSAL ELECTRIC STAGE LIGHTING CO., INC.

ALL RIGHTS RESERVED

PRINTED IN U. S. A.

Introduction

Compiled to serve the reference needs of professional people, this catalog has been thoughtfully planned to provide a valuable and dependable source of information on innumerable Kliegl items now available.

Completely revised, it includes many new and improved products, presenting a selected variety of Kliegl specialties customarily required for stage lighting in theatres, schools, community centers, public buildings and for other diversified applications.

Other Kliegl items, unlisted in this catalog, used in fields of illumination distinct from stage lighting, are also available, and particulars are furnished upon request.

Additional catalogs are available covering Kliegl products for architectural lighting; equipment for lighting television studios; and for other special adaptations of illumination. A request stating your particular field of activity will enable us to forward literature pertinent to your interests.

KLIEGL BROS.

UNIVERSAL ELECTRIC STAGE LIGHTING CO., INC.



Since the founding of Kliegl Bros. in 1896 to the present day, "Quality" and "Progress" have been the yardstick of our growth.

Our trade mark, "Kliegl Bros.", is a symbol of quality and fine craftsmanship known throughout the world. It is our never ending intention to continue to manufacture only to the very highest standards. Reputations are not fabricated, they are earned. Years of successful accomplishment in theatre lighting and switchboard control have been responsible for our being the recognized leader in the field.

Over the years, Kliegl research and development has resulted in Kliegl innovations which have become standard theatrical equipment items. Just a few of the more notable developments directly related to theatrical equipment are:

- 1903 — Complete lighting and control system installed in the Metropolitan Opera House.
- 1905 — Plugging boxes, floor pockets, stage plugs and connectors.
- 1911 — 1st arc Klieglight used in motion picture industry.
- 1915 — 1st disappearing footlight.
- 1922 — Introduction of Linnebach projection to America.
- 1928 — 1st remote — color changer spotlight.
- 1929 — Introduction of Fresnel-lens into spotlight apparatus.
- 1932 — 1st incandescent Klieglight (ellipsoidal reflector spotlights).
- 1932 — 1st pin-hole down light for auditorium use.
- 1932 — 1st 5000 watt wide-angle scenic projector.
- 1936 — Ceramic color risers on spotlight lenses.
- 1939 — 1st 2100 watt wide-angle scenic projector.
- 1943 — Projection system for Waller anti-aircraft gunnery trainer.
- 1949 — Dynabeam — 1st long throw 3000 watt ellipsoidal reflector Klieglight.
- 1951 — 1st rotary circuit selector system with a cold make and break.
- 1952 — 1st 3-phase electronic dimming system.
- 1954 — Safpatch — 1st cord-plug type cold patch circuit selector system.
- 1956 — Pole-Op — 1st pole-operated adjustable spotlight.
- 1956 — 1st Oval-Beam lens Fresnel spotlights.
- 1956 — Memory-switcher.

In the future, as in the past, "Quality" and "Progress" will continue to be our guiding light. It is our aim to continue to serve the needs of those who demand the highest standards in theatrical lighting and control.



KLIEGL

*The Great Name in
Theatrical Lighting*

KLIEGL BROS.

UNIVERSAL ELECTRIC STAGE LIGHTING CO., INC.

Originators and manufacturers of KLIEGLIGHTS

**321 WEST 50th STREET
NEW YORK 19, NEW YORK**

Telephone: COLUMbus 5-0130