


## 1954 Factsheet

---

# STRAND STAGE FLOODS

## PATTERN 30 MEDIUM-ANGLE BATTEN FLOOD 500 WATT

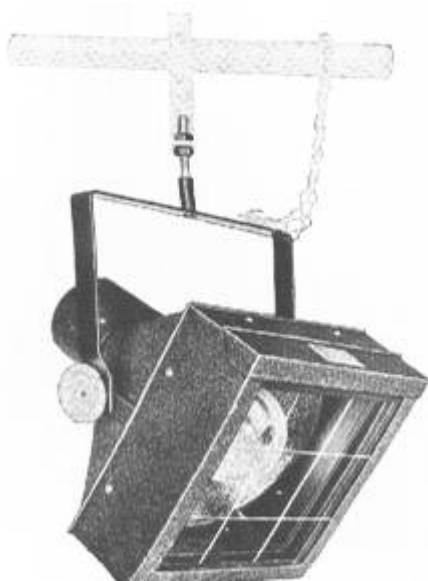

This lantern is suitable for use as a Batten flood or for any purpose which necessitates the illuminating of objects situated some distance from it.

### SPECIFICATION

The housing is strongly constructed in sheet steel, efficiently ventilated, fitted with runners to take two metal colour frames with a light-tight hinged flap at top and an anodised aluminium reflector. The tilting fork has a ½-inch Whitworth stem (for suspension by barrel clamp or insertion in stand) and eyelet for safety chain (not included). The lantern is locked in position by two hand wheels, and is wired with 3 ft. HR flexible tails. Finish : black crystalline enamel outside, matt black inside. Complete with one metal colour frame.

**Lamp** : 500W General Service type with GES cap

**Beam Angles** : Cut off 120°, Beam Angle 60°

**Weight** : Nett weight 14 lbs.