


Patt.263

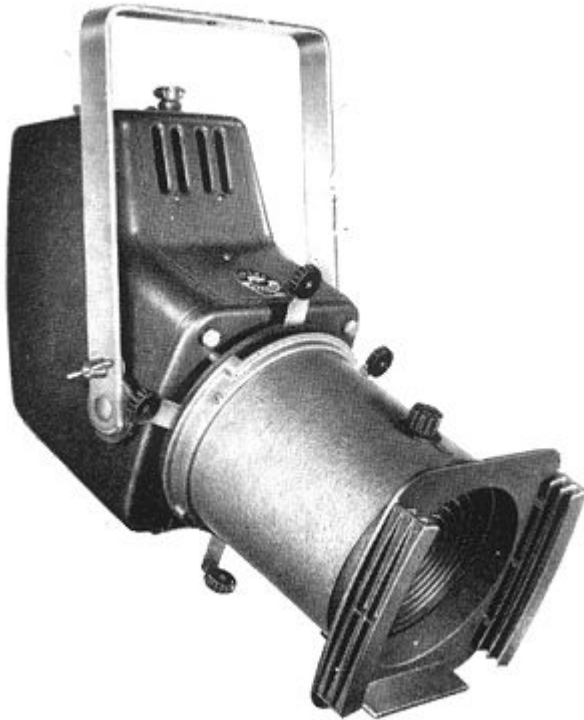

Beam Spread

Patt 263: Cut-off 20° max. ½ peak angle 18°
3m spread at 8.5m throw

Lamphouse

Steel pressings, bottom-hinged gate.

Fork

Mild steel, reversible, with friction disc tilt clamp and 3/8" Whitworth bolt and wingnut.

Lampholder

P28 medium pefocus, porcelain body, pretilted 30° from the vertical, fitted with 1m external length of 3-conductor sheathed cable.

Reflector

160mm diameter faceted ellipsoidal.

Gate assembly

Four beam shaping shutters and gate runners.

Lens

150mm diameter long focus Fresnel

Colour Frame

Double die-cast runners fitted to die-cast lens front, with 165mm square metal frame.

Lamps


1000W max. P.28 base up. 89mm l.c.l. Class T/4 recommended for stage use.

Accessories

12-leaf iris diaphragm, 2362504

Colour change wheel, 2341095

Additional metal colour frame, 2766107

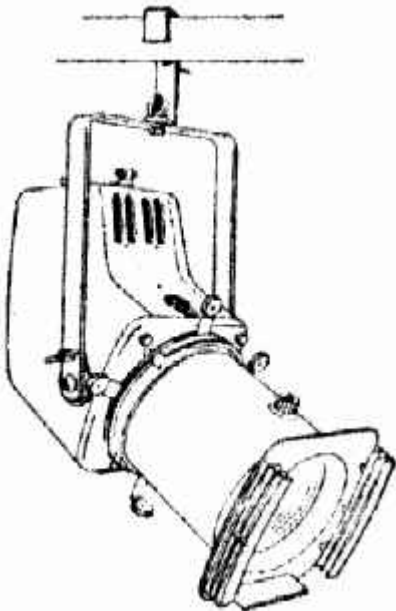

(From "Stage Lighting

