


INSPIRE

16" Focusing Scoop

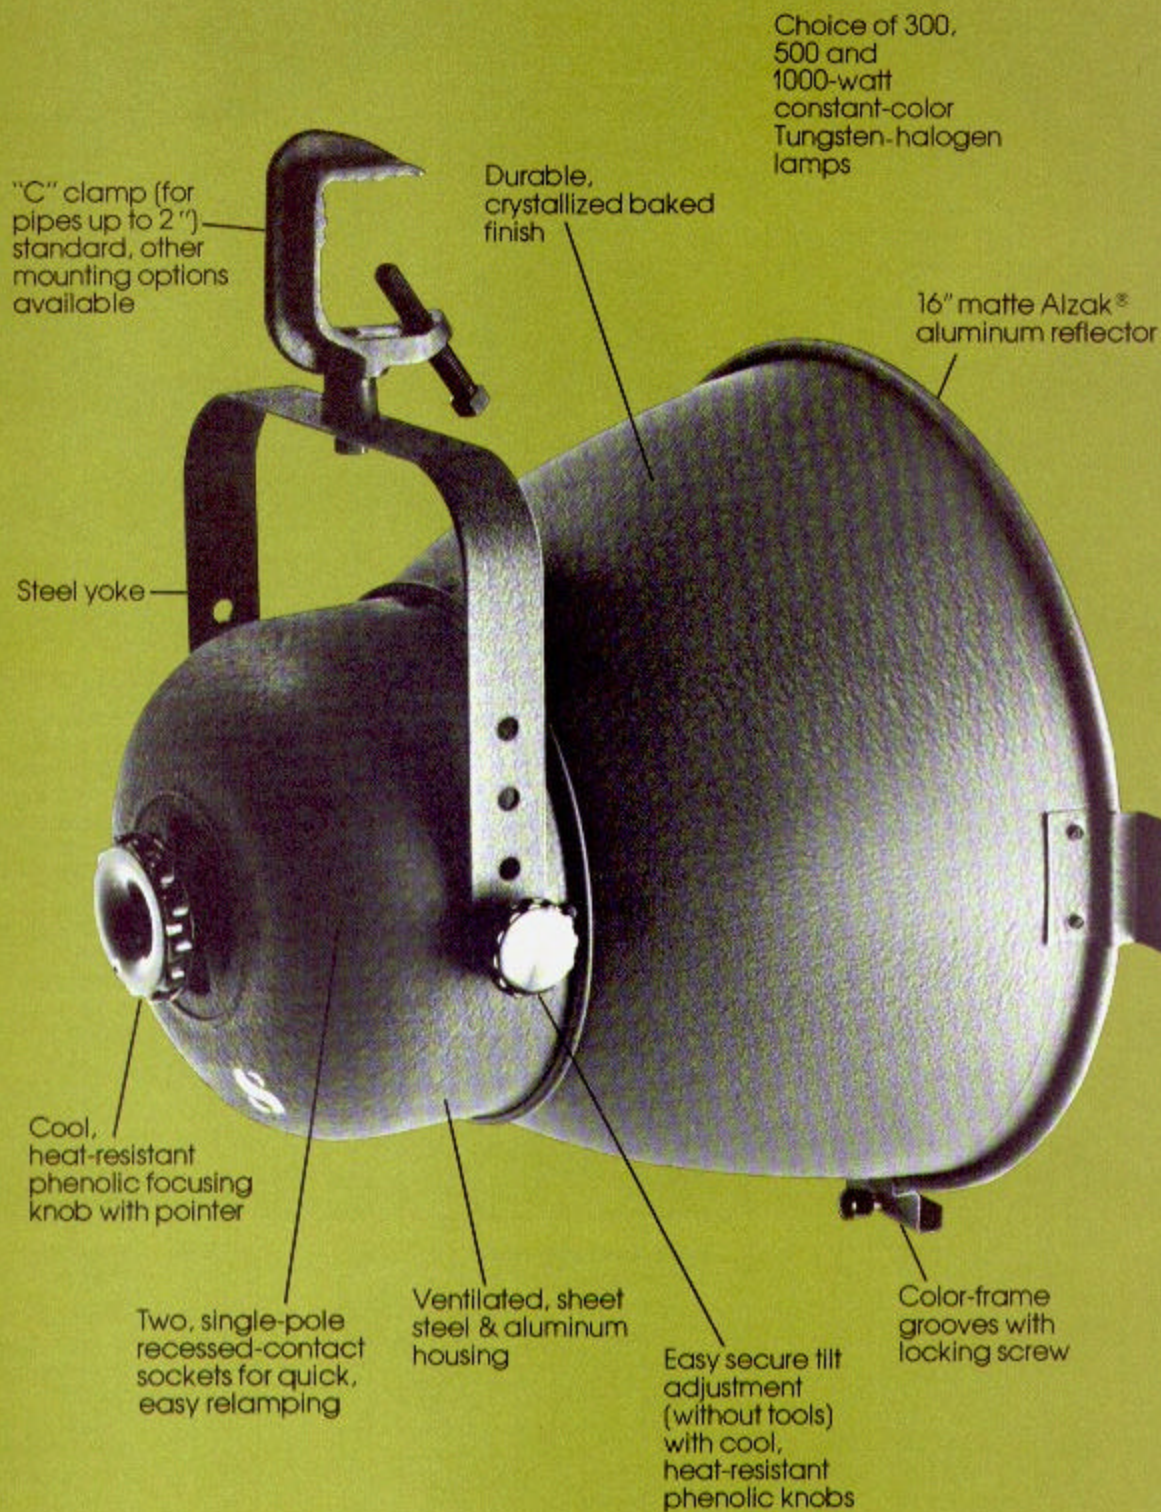

Adjustable focusing adds

options — and gives a means


available includes the standard "C" clamp. Color-

Model 3452

300-1000 watt
16" Focusing Scoop




U.L. Listed Union Made in the U.S.A.

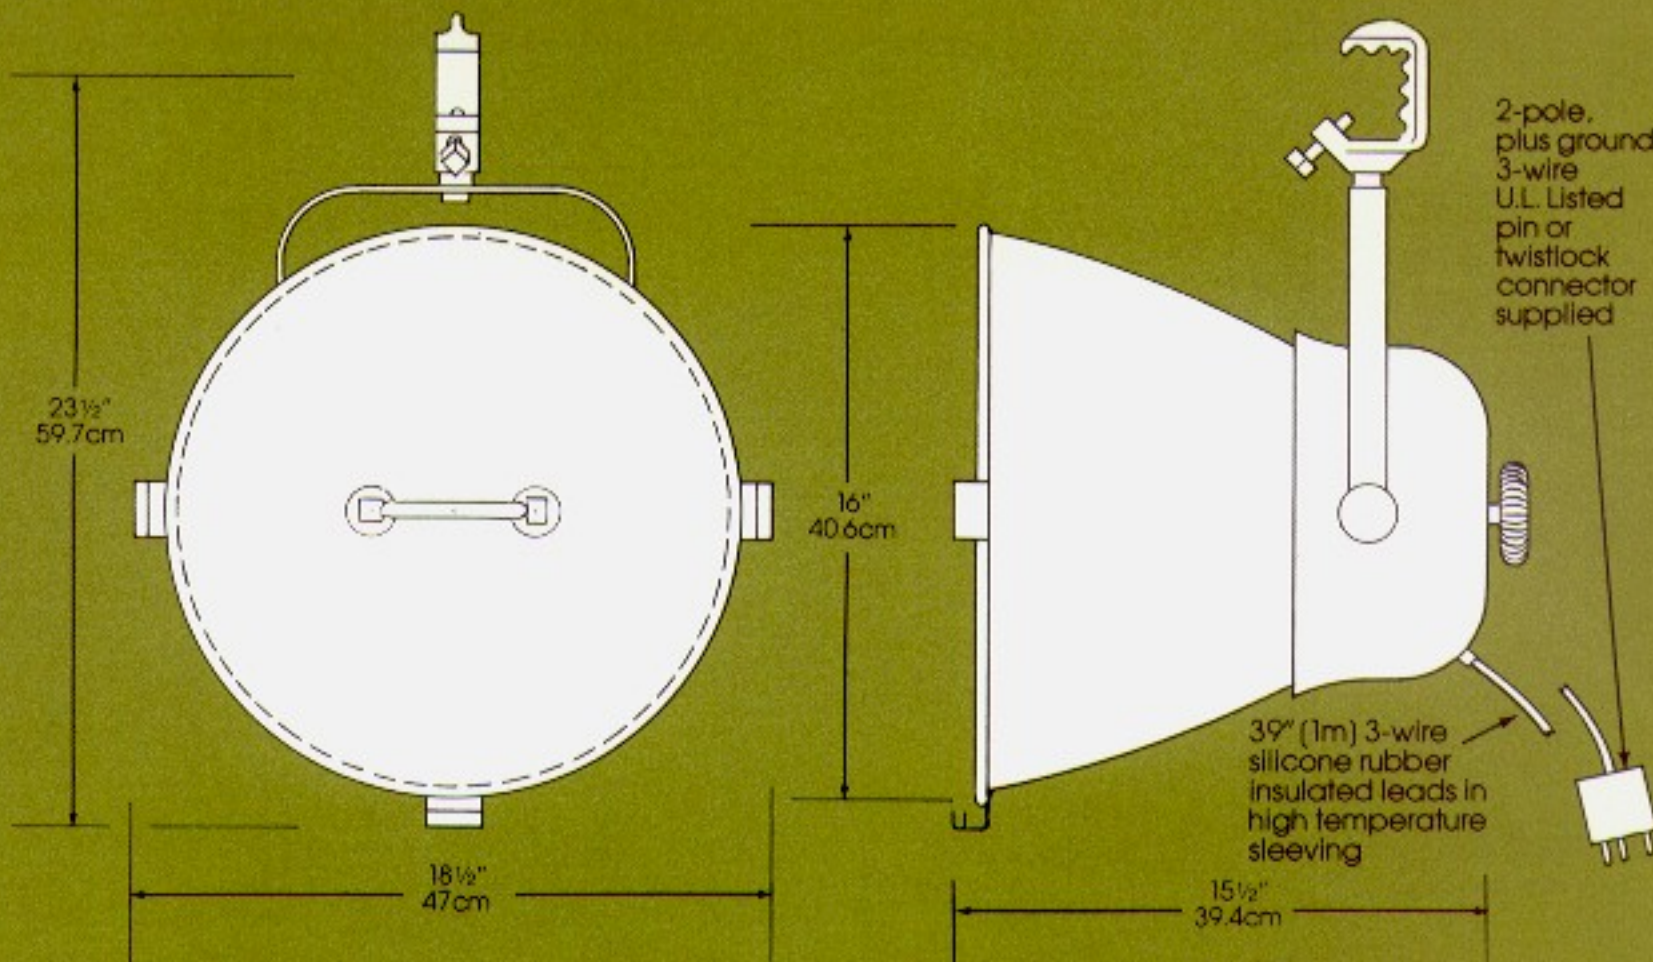


ILLUMINATION (LUX)	FHM	3744	936	420
	FDN	1768	440	190
	FCZ	1284	320	140
	EHZ	804	200	88
THROW DISTANCE (METERS)		2	4	6
FIELD DIAMETER (METERS)		6	10	15

Flood Throw Distances and Field Diameter

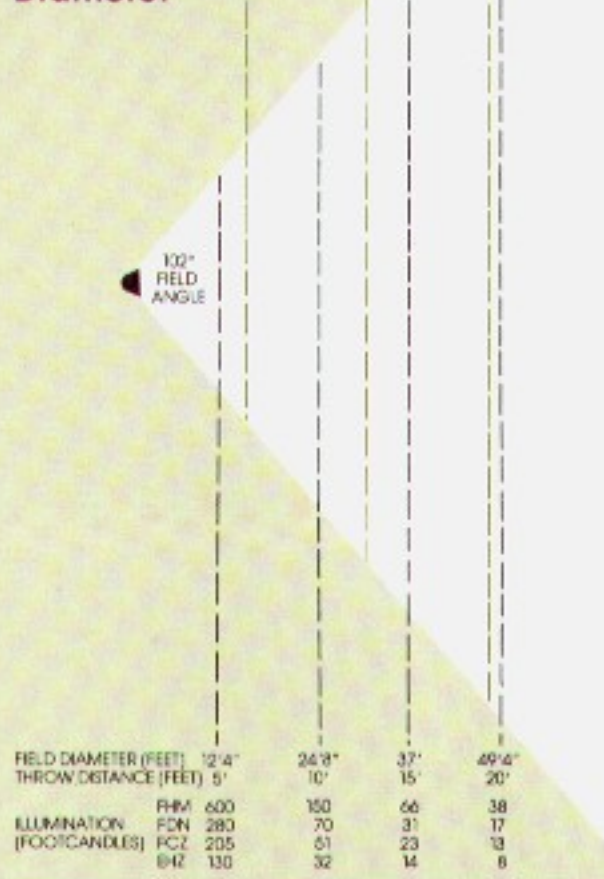


ILLUMINATION (LUX)	FHM	9654	2470	1100
	FDN	4540	1160	515
	FCZ	3387	846	376
	EHZ	2134	533	237
THROW DISTANCE (METERS)		2	4	6
FIELD DIAMETER (METERS)		2.50	5.0	7.50


Spot Throw Distances and Field Diameter

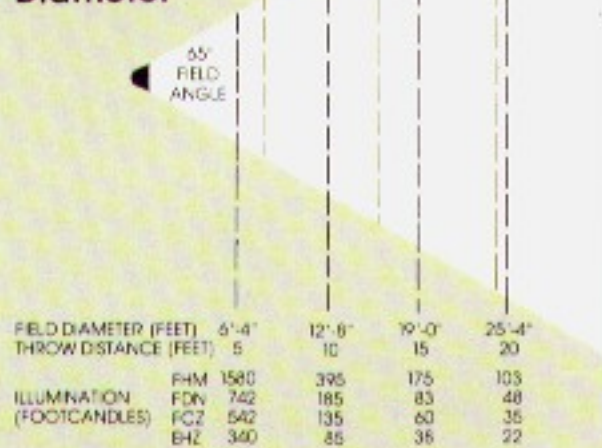

Spot Candlepower

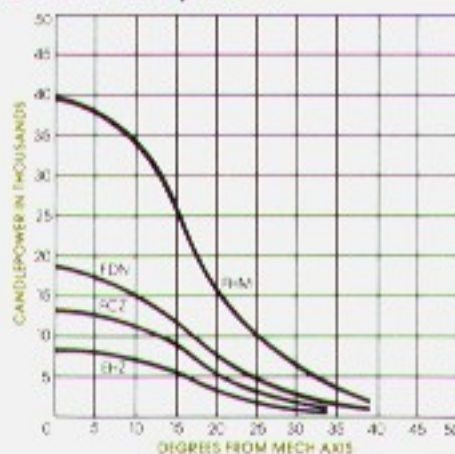

Flood Candlepower

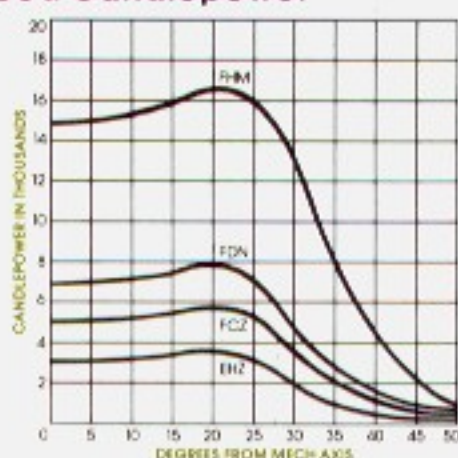

Lamps

ANSI Code	Watts	Color Temp.	Avg. Rated Life Hrs.	Nom. Lumens
EHZ	300	2950°K	2000	5,900
FCZ	500	3000°K	2000	9,300
FDN	500	3200°K	400	12,800
FHM	1000	3200°K	300	27,300

Accessories

- 13452 frame for diffusion and color media
- 1850 "C" Clamp (furnished as standard equipment)
- 1860C 18" "C" Clamp Side Arm
- 1415 18" Spoke base floor stand
- 1420 19" roller caster floor stand
- 110 Safety cable (furnished as standard equipment)
- 1867 Scenery clamp

Connectors

- 955G 2-pole, 3-wire 20A Pin connector
- TLG 2-pole, 3-wire 20Z Twistlock connector (L5-20P)



Kliegl Bros.
32-32 48th Ave.
Long Island City
New York, 11101
212/786-7474
Telex: 960158

©1977 Kliegl Bros.
Printed in U.S.A.